HUTTIGEGREP FASTENERS

CATALOG



BUILT ON EXPERIENCE. FOCUSED ON THE FUTURE.

For more than 130 years, Huttig Building Products has been helping to build the American dream. Founded in 1885 by brothers Charles and William Huttig, Huttig understands the value of teamwork, commitment, and what it takes to be successful every day and for years to come.

Today, Huttig is the country's largest value-added distributor of millwork products such as interior and exterior doors, plus much more. With 27 distribution centers and access to 75%+ of the US housing market, what started out as a saw mill and lumberyard has evolved to become America's only national distributor of millwork and specialty building products.

This spirit of service and innovation led Huttig to create the Huttig-Grip brand of fasteners, and for more than 20 years, this respected line has been available on a regional basis. Now, Huttig unveils the re-imagined and expanded line of Huttig-Grip construction fasteners, collated fasteners, and building materials.

What makes Huttig-Grip products unique?

- Available nationwide through Huttig's broad distribution network
- Developed by a team of industry experts that knows the products, knows the business and knows what dealers need to sell more fasteners
- Sourcing network to ensure reliable, diverse supply of fasteners from the most reputable mills around the world, including North American suppliers for short lead times.
 US product also available
- Packaging completely redesigned for painless execution and flawless presentation at point of sale

Make Huttig-Grip your choice and the best choice for your customers.

1885

Huttig founded by brothers Charles and William Huttig 1917

Huttig called to support war effort, manufactures aircraft

1934

Expansion of branches across the country

Huttig + Huttig-Grip is the right choice for your business. How?

- A growing mix of products brought to you by the people and the company that you know and trust
- With more than 30,000 Huttig-Grip SKUs and tens of millions of dollars invested in local inventories, your success is our success
- Increase turns and minimize stock-outs with our next-day delivery of inventoried shelf items
- Huttig-Grip plus many other leading brands across millwork and building material categories
- Warehouse and direct programs; Huttig provides experienced support across a variety of platforms to fit your changing business needs

With Huttig-Grip brand products from Huttig, you now have access to a diverse mix of products, ranging from specialty doors and millwork to building materials and construction fasteners. It's a value proposition that's unparalleled in the industry—and one that helps you get more of what you really need: sales!

YOU DESERVE A CHOICE. AND WITH HUTTIG-GRIP PRODUCTS, YOU GET IT.

1967 New era of growth and expansion

1941Huttig produces war materials for U.S. government

2017

Huttig offers renewed and expanded Huttig-Grip products

2015

Huttig launches iconic "We Love Building" campaign

2003

Branches run by general managers who localize offering

1985


Huttig experiences \$700 million in growth over 15 years

1976

Huttig generates \$100 million in sales





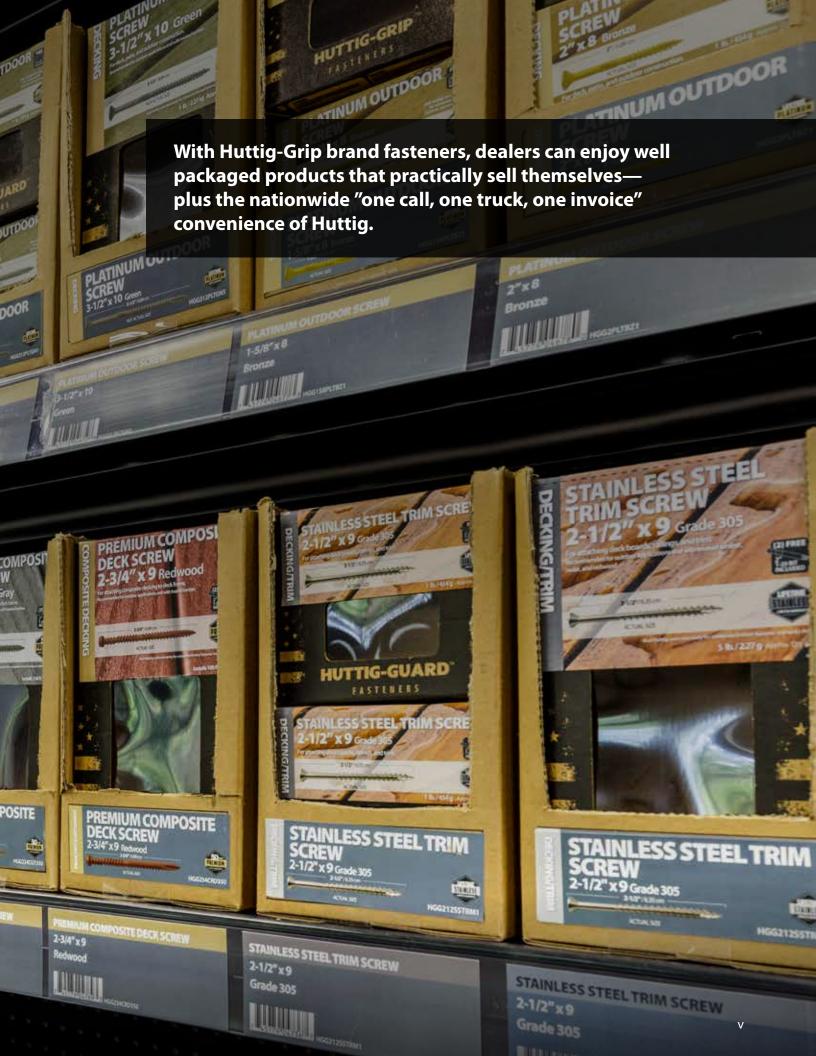



WE MAKE IT LOOK EASY

With icons that are easy to see and text that's simple to understand, Huttig-Grip makes identifying the right product a snap. The faster a customer can find what they need, the happier they'll be with what you have to offer.

APPLICATION:

The four most common uses of fasteners—general, outdoor, roofing/siding and drywall—each associated with a color.

FINISH:

Recommended fastener finishes within each application category.

HUTTIG-GRIP FASTENERS

APPLICATION			AVA	AILABLE	FINISH	HES				
General Construction	BRT	EG ELECTRO GALVANIZED			VC VINYL COATED					YZ YELLOW ZINC
Outdoor Construction		EG ELECTRO GALVANIZED	HG HOT GALVANIZED	OG OUTDOOR GALVANIZED						
Roofing & Siding	BRT BRIGHT	EG ELECTRO GALVANIZED	HG HOT GALVANIZED					ALUMINUM	CU	
Drywall	BRT				VC VINYL COATED	PC PHOSPHATE COATED	BL BLUED			

HUTTIG-GUARD FASTENERS

FINISH	STAINLESS STEEL	PLATINUM	PREMIUM	PROFESSIONAL
WARRANTY	STAINLESS INTERVARIABLE	PLATINUM PLATINUM CUMITED WANDAUTY	PREMIUM UNITED WARRANT	PROFESSIONAL LUMITO WIGHRAMT

HUTTIG-SPIN FASTENERS

COLOR CODE	APPLICATION	AVA	ILABLE	FINISH	HES	-
Drywall	For attaching drywall to wood	PC PHOSPHATE COATED				
Light Gauge	For attaching drywall and other materials to light-gauge steel	PC PHOSPHATE COATED	ZP ZINC PLATED			
Heavy Gauge	For attaching drywall and other materials to heavy-gauge steel	PC PHOSPHATE COATED	ZP ZINC PLATED			
Wood	For attaching to wood			BRT BRIGHT	YZ YELLOW ZINC	
Fiber/Cement Board	For attaching cement and fiber cement board					PREMIUM IMMED WARRANTY

LABEL



Most popular application in the color band.



Most popular application and appropriate use in text on the label.



Most popular application as a photo in the label background.





Color-coded band & finish icon—identifies what type of finish/where best used.

Actual size photo eliminates boxes torn open so someone can see what the actual fastener looks like.



Key information provided in Spanish.



Icons clearly show product attributes.



THE DIFFERENCE IS IN THE DETAILS

There's nothing left to chance on Huttig-Grip product packaging. From box design to label layout, colors to imagery, everything is created to make products easy to stock and even easier to sell.

MASTER CARTONS

Master cartons feature the same width and height, making it easy for dealers to switch-up merchandising to maximize inventory turns, as well as simplifying inventory overstock.





Our packaging features a unique, retro-inspired look that stands out from the competition. It's an easy-to-spot style that's also a reminder that Huttig-Grip products are built on a 130+ year history and created to work hard.

PACKAGED FOR PROS. PERFORMANCE TO COUNT ON.

Large jobs call for big solutions, and that's exactly what Huttig-Grip products bring with bulk and collated fastener selections—featuring built-in handles, standard package widths, easy-to-understand labeling and more.

HAND DRIVE





COLLATED



Huttig-Grip Collated Fasteners is the only brand of collated fasteners that you need, for every job and for every tool:

• Coil Roofing Nails

MADE IN THAILAND

- Framing Nails-Stick & Coil
- Fencing/Siding Nails
- · Joist Hanger Nails
- Medium & Wide Crown Staples
- Narrow Crown Staples, Finish & Brad Nails
- Flooring Staples & Cleat Nails

Many collated boxes feature convenient built-in handles for easier carrying, plus bold styling for stronger merchandising.

WHY HUTTIG-GRIP?

Products and materials are sourced from the highest quality suppliers across the globe, including North America and Made In USA (where available), ensuring that our supply can always meet your demand.

TABLE OF CONTENTS

Huttig-Grip Application & Finishes. Galvanized Nail Overview Drywall. Interior Lath Fence/Deck Fencing Finish/Trim Flooring Forming Forming Framing Landscaping Masonry Pole Barn Roofing Roofing/Siding	14-
Application & Finishes. Galvanized Nail Overview Drywall. Interior Lath Fence/Deck Fencing. Finish/Trim Flooring Forming Forming Landscaping. Masonry. Pole Barn Roofing. Roofing/Siding. Siding	14-
Galvanized Nail Overview Drywall Interior Lath Fence/Deck Fencing Finish/Trim Flooring Forming Framing Landscaping Masonry Pole Barn Roofing Roofing/Siding Siding	14-
Drywall Interior Lath Fence/Deck Fencing Finish/Trim Flooring Forming Landscaping Masonry Pole Barn Roofing Roofing/Siding Siding	14-
Interior Lath Fence/Deck Fencing Finish/Trim Flooring Forming Framing Landscaping Masonry Pole Barn Roofing Roofing/Siding	14-
Fence/Deck Fencing Finish/Trim Flooring Forming Forming Landscaping Masonry Pole Barn Roofing Roofing/Siding	14-
Fencing Finish/Trim Flooring Forming Framing Landscaping Masonry Pole Barn Roofing Roofing Siding	14-
Finish/Trim Flooring Forming Framing Landscaping Masonry Pole Barn Roofing Roofing/Siding Siding	14-
Flooring	14-
Forming	14-
Framing Landscaping Masonry Pole Barn Roofing Roofing Siding	14-
Landscaping	19-2
Masonry Pole Barn Roofing Roofing/Siding	19-
Pole Barn	
Roofing Roofing/Siding Siding	
Roofing/SidingSiding	
Siding	
Siding/Trim	
Exterior Lath	
Speciality	3
Huttig-Guard Stainless Steel	3
Application & Finishes	
Fence/Deck - Stainless Steel	
Framing - Stainless Steel	
Roofing & Siding - Stainless Steel	
Roofing/Siding & Trim - Stainless Steel	
Wood Screw Features & Benefits	
Wood Screw Features & Benefits Huttig-Grip	40
Wood Screw Features & Benefits Huttig-Grip Application & Finish	40-4
Wood Screw Features & Benefits	40-4
Wood Screw Features & Benefits	40-4
Wood Screw Features & Benefits Huttig-Grip Application & Finish Wood-to-Wood Huttig-Guard	40-4
Wood Screw Features & Benefits	40-4
Wood Screw Features & Benefits	40-4
Wood Screw Features & Benefits	40-
Wood Screw Features & Benefits	40-
Wood Screw Features & Benefits	40-
Huttig-Grip Application & Finish Wood-to-Wood Huttig-Guard Application & Finishes Huttig-Guard Comparison Decking - Stainless Steel Decking - Platinum Lifetime Decking - Premium 50 Year Decking - Pro 15 Year	40-4
Wood Screw Features & Benefits	40-
Wood Screw Features & Benefits	40-

Product availability varies by location.

TABLE OF CONTENTS

77 75 74-79
77 75 74-79
73 74-79
74-79
74-79 80
80
· · · · · · · · · · · · · · · · · · ·
8°
82
83
84
85
86
87
88
89-90
91
91
91
91
92
93
94
95
97
99
100



Construction Fasteners

HUTTIG-GRIP™ HUTTIG-GUARD™

Construction Fasteners	•••••
Hustin Crin	
Huttig-GripApplication & Finishes	
Galvanized Nail Overview	
Drywall	
Interior Lath	
Fence/Deck	
Fencing	
Finish/Trim	
Flooring	
Forming	
Framing	
Landscaping	
Masonry	
Pole Barn	
Roofing	
Roofing/Siding	
Siding	28-29
Siding/Trim	
Exterior Lath	
Speciality	32
Huttig-Guard Stainless Steel	
Application & Finishes	33
Fence/Deck - Stainless Steel	
Framing - Stainless Steel	34
Roofing & Siding - Stainless Steel	
Roofing/Siding & Trim - Stainless Steel	36
- · ·	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

www.huttig.com

Application & Finishes

APPLICATION				AVAILA	ABLE FIN	NISHES			
General Construction	BRT	EG ELECTRO GALVANIZED			VC VINYL COATED				
Outdoor Construction		EG ELECTRO GALVANIZED	HG HOT GALVANIZED	OG OUTDOOR GALVANIZED					
Roofing & Siding	BRT BRIGHT	EG ELECTRO GALVANIZED	HG HOT GALVANIZED					ALUMINUM	Cu
Drywall	BRT				VC VINYL COATED	PC PHOSPHATE COATED	BL BLUED		

FINISH RECOMMEND	ATIONS		
BRT BRIGHT BRIGHT	Plain, "bright" steel without any additional protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.	
VC VINYL COATED VC VINYL COATED	Nail dipped in vinyl; vinyl heats as nail is driven into wood for easier driving, provides nominal enhanced holding power when cools.	Vinyl coating does not provide protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.
PC PHOSPHATE COATED	Iron phosphate coating created on the surface of the fastener to en- hance adhesion of paint and other finishes (drywall compound).	Phosphate coating provides minimal protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.
BL BLUED	Exposed to heat for "sterilization", which creates the blue appearance.	Most commonly used on lath or other relatively small nails, which at one time were often held in the mouth prior to nailing.	Not recommended for outdoor applications or where moisture may be present.
EG ELECTRO GALVANIZED ELECTRO GALVANIZED ELECTRO GALVANIZED	Zinc plating bonded to steel with electrical charges; smooth, shiny finish.	Electro galvanization provides moderate protection against corrosion.	Recommended for outdoor applications excluding treated lumber.
HG HOT GALVANIZED HOT GALVANIZED	Hot zinc applied to fastener for thicker, more durable coating; rougher, sometimes darker finish.	Hot galvanization provides significant protection against corrosion.	Recommended for outdoor applications and with treated lumber.
OG OUTDOOR GALVANIZED	Multi-step process; zinc applied to fastener followed by a variety of methods to harden the coating for additional protection.	Outdoor galvanization provides significant protection against corrosion, equal to or better than hot galvanization.	Recommended for outdoor applications and with treated lumber.
ALUMINUM	Inherently resistant to corrosion, lighter than comparable steel nails.	Used with aluminum flashing, gutters, siding, and screening.	Not recommended for use with treated lumber or copper flashing due to corrosive reaction.
Cu	Copper is anti-corrosive by nature; known for durability and longevity. Develops attractive patina with age.	Commonly used with roofing tiles and slates, copper roofs and gutters; can also be used with treated lumber.	Not recommended for use with aluminum flashing or other aluminum materials due to corrosive reaction.

Make the right choice for outdoor projects, choose Huttig-Grip galvanized nails.

Huttig-Grip Hot Galvanized and Outdoor Galvanized Nails – Two Solutions to the Same Problems

- ✓ Extend the life of your outdoor project.
- ✓ Minimize staining and "bleeding" from rusting nails.
- Use Huttig-Grip galvanized nails for extra protection against rust and corrosion.

Steel nails can be compromised by moisture, chemicals in the wood (naturally occurring or treated), and other factors. Coatings and other finishes can be applied for additional protection against corrosion and rust.



HUTTIG-GRIP HOT GALVANIZED NAILS & OUTDOOR GALVANIZED NAILS

- Are recommended for outdoor applications and with treated lumber
- Meet or exceed ASTM A153 Class D requirements for galvanization
- Last longer than non-galvanized nails, extending the life of your project!



OUTDOOR GALVANIZED

- Recommended for outdoor applications and with treated lumber
- Meet or exceed ASTM A153 Class D requirements
- Smoother finish than HG
- Outperforms HG in ASTM B117-compliant salt spray testing (evaluates approximate lifespan)



HOT GALVANIZED

- Recommended for outdoor applications and with treated lumber
- Meet or exceed ASTM A153 Class D requirements
- Nails or the wire used to make nails may be tumbled or dipped in hot, molten zinc

Huttig-Grip galvanized nails availability varies by market preference; hot galvanized or outdoor galvanized might not be stocked in all areas. Visit huttig.com/warranty for complete limited fastener warranty details.

4



• Reduces tool jamming (when applied to collated nails)

HG **OUTDOOR GALVANIZED HOT GALVANIZED** HOT Salvan**i**zed OG Outdoor Galvanization is an alternative to HG Hot HG Hot Galvanization is a traditional process to provide Galvanization with equal or better corrosion resistance. additional protection against corrosive environments and materials. **ASTM Compliance & Testing** OG coating thickness is equal to or better than ASTM A153D HG coating thickness is equal to or better than ASTM A153D specifications. specifications. OG outperforms HG in a traditional salt spray test performed according to ASTM B117. **Surface** • Smooth, uniform coating for better protection · Coating may not always be evenly coated or distributed

Process Primarily two methods to produce OG nails: Primarily two methods to produce HG nails: 1. Thermal Diffusion 2. EG Electro Galvanized 1. Formed from Galvanized 2. Dipped in Molten Zinc After Nail Formation (Hot Galvanization Zinc + Organic Top Coat **Dipped Galvanization)** · Nails placed in a cylinder Nails are first electro · Carbon steel used to Nails are formed from with a dry zinc mixture manufacture nails is passed bright carbon steel wire galvanized (zinc/iron), heated, and Electro galvanized nails The formed nails are then through a tank of molten slowly rotated for several then painted with an dipped twice in molten zinc hours (vaporized diffusion organic coating and baked • The galvanized wire is then (more common for hand used to form nails (most drive versus collated nails) process) twice Nails are then cleaned and Organic coating behaves often used for collated passivated, and dried as a barrier between nails) the zinc on the nail and corrosive materials such as the chemicals in treated lumber Coating is harder than that of Zinc coating is softer than zinc/iron OG coating other zinc coatings

• Zinc may fill threads on ring or spiral shank nails

· Increases the diameter/bulk of the nail

• Process creates significant waste streams

• Acid-pickling (used to prepare the nails after galvanization) is

HUTTIG-GUARD STAINLESS STEEL NAILS

For the ultimate protection against corrosion, choose HUTTIG-GUARD stainless steel nails. Backed by a limited lifetime fastener warranty, HUTTIG-GUARD stainless steel nails are recommended for outdoor applications and with treated lumber, cedar, and redwood. Use HUTTIG-GUARD Grade 316 Stainless Steel nails in marine environments.

Molten Zinc

harmful to environment



Thermal Diffusion

Minimal wasteAcid-free cleaning

Environmentally-friendly

Galvanization

process

Drywall Nail

For attaching sheets of drywall to wood studs.

- · Thin, broad head sits flush against surface
- · Ring shank for greater holding power
- · Long diamond point reduces tearing of drywall paper
- Conforms to ASTM C514



Available Finishes





•							
Size	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT							
1-1/4"	.099"	11/32"	Ring	339	HGN114RSDWN1	HGN114RSDWN5	HGN114RSDWN
1-3/8"	.099"	11/32"	Ring	320	HGN138RSDWN1	HGN138RSDWN5	HGN138RSDWN
1-5/8"	.099"	11/32"	Ring	260	HGN158RSDWN1	HGN158RSDWN5	HGN158RSDWN
BLUED							
1-3/8"	.099"	11/32"	Ring	316	HGN138BLRSDW1	HGN138BLRSDW5	_
1-5/8"	.099"	11/32"	Ring	295	HGN158BLRSDW1	HGN158BLRSDW5	_

Drywall Nail - Cupped Head

For attaching sheets of drywall to wood studs.

- · Cupped head sinks into surface, accepts joint compound
- Slightly heavier shank than standard drywall nails
- Smooth shank and long diamond point reduces tearing of drywall paper
- Phosphate coating reduces friction, binds with joint compounds and paint
- Conforms to ASTM C514





Lath Nail

For attaching wood lath strips to wood studs.


- Smooth, slender nail to minimize splitting narrow strips of lath
- Heat sterilization process creates blue oxide film, more resistant to corrosion from wet plaster
- Smooth, flat head
- · Diamond point



Size	Size Shank		5 lb. Box 5 / master	50 lb. Box
BLUE	ED			
1-1/8"	1-1/8" Smooth		HGN118BLLTH5	_
1-1/4"	Smooth	365	HGN114BLLTH5	HGN114BLLTH

Available Finish



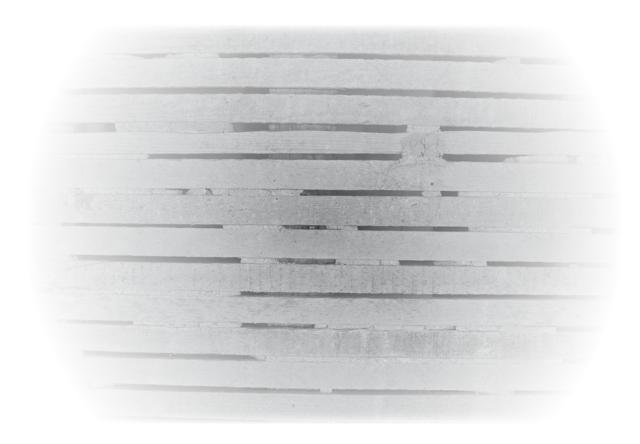

Deck Nail

For deck, patio, fence, and other outdoor construction.

- · Flat head seats flush against surface
- Diamond point
- Ring shank for use in softer woods and where vibration may be a factor
- Spiral shank for use with harder woods and near board ends to minimize splitting









Ring shank depicted, spiral shank also available

Siz	e	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
НОТ	GAL	_VANIZE	ED						
2"	6d	.120"	.281"	Ring	138	HGN6HGRSDK1	HGN6HGRSDK5	_	HGN6HGRSDK
2-1/2"	8d	.120"	.281"	Ring	106	HGN8HGRSDK1	HGN8HGRSDK5	HGN8HGRSDKBK	HGN8HGRSDK
3"	10d	.135"	.297"	Ring	78	HGN10HGRSDK1	HGN10HGRSDK5	_	HGN10HGRSDK
3-1/4"	12d	.135"	.297"	Ring	75	HGN12HGRSDK1	HGN12HGRSDK5	HGN12HGRSDKBK	HGN12HGRSDK
3-1/2"	16d	.148"	.313"	Ring	52	HGN16HGRSDK1	HGN16HGRSDK5	HGN16HGRSDKBK	HGN16HGRSDK
2"	6d	.113″	.297"	Spiral	138	HGN6HGSTDK1	HGN6HGRSTDK5	_	HGN6HGSTDK
2-1/2"	8d	.113″	.297"	Spiral	106	HGN8HGSTDK1	HGN8HGRSTDK5	HGN8HGSTDKBK	HGN8HGSTDK
3"	10d	.128"	.312"	Spiral	78	HGN10HGSTDK1	HGN10HGRSTDK5	HGN10HGSTDKBK	HGN10HGSTDK
3-1/4"	12d	.135"	.344"	Spiral	75	HGN12HGSTDK1	HGN12HGRSTDK5	HGN12HGSTDKBK	_
3-1/2"	16d	.135"	.344"	Spiral	52	HGN16HGSTDK1	HGN16HGRSTDK5	HGN16HGSTDKBK	HGN16HGSTDK
OUTI	DOO	R GALV	ANIZED						
2"	6d	.120"	.281"	Ring	138	HGN6OGRSDK1	HGN6OGRSDK5	_	_
2-1/2"	8d	.120″	.281"	Ring	106	HGN8OGRSDK1	HGN8OGRSDK5	_	_
3"	10d	.135"	.297"	Ring	78	HGN100GRSDK1	HGN100GRSDK5	_	_
3-1/4"	12d	.135"	.297"	Ring	75	HGN12OGRSDK1	HGN12OGRSDK5	_	_
3-1/2"	16d	.148″	.313"	Ring	52	HGN16OGRSDK1	HGN16OGRSDK5	_	HGN16OGRSDK
2"	6d	.113″	.297"	Spiral	138	HGN6OGSTDK1	HGN6OGSTDK5	_	_
2-1/2"	8d	.113″	.297"	Spiral	106	HGN8OGSTDK1	HGN8OGSTDK5	_	_
3"	10d	.128″	.312"	Spiral	78	HGN100GSTDK1	HGN100GSTDK5	_	_
3-1/4"	12d	.135"	.344"	Spiral	75	HGN12OGSTDK1	HGN12OGSTDK5	_	_
3-1/2"	16d	.135"	.344"	Spiral	52	HGN16OGSTDK1	HGN16OGSTDK5	_	HGN16OGSTDK

Stainless Steel Deck Nail also available - see Huttig-Guard section for details.




Fence Staple

For attaching wire and wire fence to wood fence posts.

- Can also be used to attach suspended ceiling grid to wood rafters
- Conforms to ASTM F1667-17





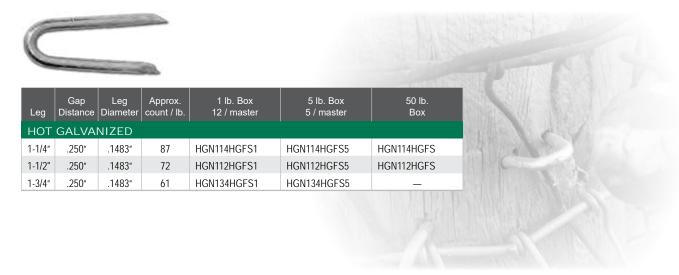


Poultry Net Staple

For attaching poultry netting to wood frame.

- Narrow 3/16" inside spread to securely fasten poultry netting to wood post or frames
- Conforms to ASTM F1667-17

Available Finish



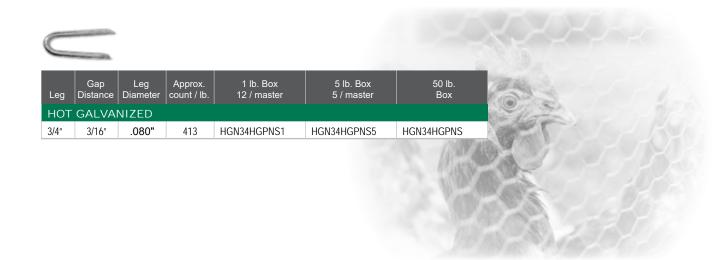

Finish Nail

For attaching trim and moulding.

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Cupped head for ease of concealment
- Diamond point

Available Finishes









_											
Siz	ze	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box			
BRIG	ЭНТ										
1-1/4"	3d	.067"	.099"	Smooth	880	HGN3F1	HGN3F5	_			
1-1/2"	4d	.072"	.106"	Smooth	630	HGN4F1	HGN4F5	HGN4F			
1-3/4"	5d	.072"	.106"	Smooth	530	HGN5F1	_	_			
2"	6d	.092"	.135"	Smooth	290	HGN6F1	HGN6F5	HGN6F			
2-1/2"	8d	.099"	.142"	Smooth	190	HGN8F1	HGN8F5	HGN8F			
3"	10d	.113"	.155"	Smooth	120	HGN10F1	HGN10F5	HGN10F			
3-1/4"	12d	.113"	.155"	Smooth	110	HGN12F1	HGN12F5	_			
3-1/2"	16d	.120″	.162"	Smooth	93	HGN16F1	HGN16F5	_			
ELEC	CTRO	O GALVA	ANIZED								
1-1/4"	3d	.067"	.099"	Smooth	880	HGN3EGF1	HGN3EGF5	_			
1-1/2"	4d	.072"	.106"	Smooth	630	HGN4EGF1	HGN4EGF5	_			
1-3/4"	5d	.072"	.106"	Smooth	530	HGN5EGF1	HGN5EGF5	_			
2"	6d	.092"	.135"	Smooth	290	HGN6EGF1	HGN6EGF5	_			
2-1/2"	8d	.099"	.142"	Smooth	190	HGN8EGF1	HGN8EGF5	_			
3"	10d	.113"	.155"	Smooth	120	HGN10EGF1	HGN10EGF5	_			
3-1/4"	12d	.113″	.155"	Smooth	110	HGN12EGF1	HGN12EGF5	_			
3-1/2"	16d	.120"	.162"	Smooth	93	HGN16EGF1	HGN16EGF5	_			
НОТ	GAL	VANIZE	ED								
1-1/2"	4d	.072"	.106"	Smooth	630	HGN4HGF1	HGN4HGF5	HGN4HGF			
2"	6d	.092"	.135"	Smooth	290	HGN6HGF1	HGN6HGF5	HGN6HGF			
2-1/2"	8d	.099"	.142"	Smooth	190	HGN8HGF1	HGN8HGF5	HGN8HGF			
3″	10d	.113″	.155"	Smooth	120	HGN10HGF1	HGN10HGF5	HGN10HGF			
3-1/4"	12d	.113″	.155″	Smooth	110	HGN12HGF1	HGN12HGF5	_			
	16d	.120"	.162"	Smooth	93	HGN16HGF1	HGN16HGF5	_			
			ANIZED								
1-1/2"	4d	.072"	.106"	Smooth	630	HGN4OGF1	HGN4OGF5	_			
2"	6d	.092"	.135"	Smooth	290	HGN6OGF1	HGN6OGF5	_			
2-1/2"	8d	.099"	.142"	Smooth	190	HGN8OGF1	HGN8OGF5	_			
3"	10d	.113″	.155"	Smooth	120	HGN100GF1	HGN10OG5	_			
3-1/2"	16d	.120″	.162"	Smooth	93	HGN16OGF1	HGN16OGF5	_			

Casing Nail

For attaching trim, window, and door casing.

- Similar to finish nails but with slightly larger head and heavier gauge for window frames and door jambs
- Deep countersunk head sinks into wood, aids with concealment
- · Diamond point
- · Conforms to ASTM F1667-17





Available Finishes

HG

OG

OUTDOOR

Cut Flooring Nail

For laying tongue and groove softwood and hardwood flooring.

- · Tempered hardened steel for harder, less brittle nail
- · Blunt point and tapered shank minimize splitting in wood
- Flat, rectangular head



Size	Size cou		1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
TEMPERED HARD		ED HARD	ENED STEEL - E	BRIGHT	
2"	6d	104	HGN6CUTFL1	HGN6CUTFL5	_
2-1/4"	7d	88	HGN7CUTFL1	HGN7CUTFL5	HGN7CUTFL
2-1/2"	8d	78	HGN8CUTFL1	HGN8CUTFL5	HGN8CUTFL



Flooring Nail

For attaching hardwood strip flooring to subfloor.

- Tempered hardened steel for harder, less brittle nail
- Spiral shank prevents loosening of nail, reduces squeaks



Size	e	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
TEMI	PERI	ED HAR	DENED	STEEL - BRI	GHT		
2-1/4"	7d	.113"	.200"	Spiral	160	HGN7FLR1	HGN7FLR5

Available Finish


BRT BRIGHT

Underlayment Nail

For attaching composition underlayment or plywood over subfloor or existing floors.

- Flat head seats flush against surface
- Diamond point



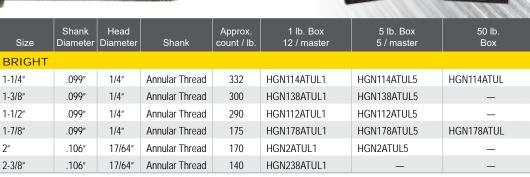



Available Finish

BRTBRIGHT

Duplex Nail

For concrete forms, scaffolding, and other temporary applications.

Also known as scaffold nail

- Double head and smooth, uncoated shank allow for ease of removal
- Diamond point
- Conforms to ASTM F1667-17







Size	e*	Shank Diameter	Head Separation	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIG	НТ								
1-3/4"	6d	.113"	1/4"	Smooth	156	HGN6DUPX1	HGN6DUPX5	_	HGN6DUPX
2-1/4"	8d	.131"	1/4"	Smooth	90	HGN8DUPX1	HGN8DUPX5	HGN8DUPXBK	HGN8DUPX
2-3/4"	10d	.148″	5/16"	Smooth	59	HGN10DUPX1	HGN10DUPX5	_	HGN10DUPX
2-7/8"	12d	.148″	5/16"	Smooth	57	HGN12DUPX1	HGN12DUPX5	HGN12DUPXBK	HGN12DUPX
3"	16d	.162"	3/8"	Smooth	45	HGN16DUPX1	HGN16DUPX5	HGN16DUPXBK	HGN16DUPX

^{*} Length of the nail is measured from beneath the lower head to tip of nail



Box Nail

For light-duty general construction, carpentry, and box making.

- Relatively thinner shank and sharp point minimize splitting in wood
- Smaller shank and head than common nails of the same length
- · Flat head sits flush against surface
- · Diamond point
- Conforms to ASTM F1667-17

Available Finishes







Siz	:e	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIG	SHT								
2"	6d	.099″	.266"	Smooth	220	HGN6BX1	HGN6BX5	_	_
2-1/2"	8d	.113"	.297"	Smooth	140	HGN8BX1	HGN8BX5	_	HGN8BX
3"	10d	.128″	.312"	Smooth	90	HGN10BX1	HGN10BX5	_	HGN10BX
3-1/4"	12d	.128″	.312"	Smooth	83	HGN12BX1	HGN12BX5	_	HGN12BX
3-1/2"	16d	.135″	.344"	Smooth	69	HGN16BX1	HGN16BX5	_	HGN16BX
4"	20d	.148″	.375″	Smooth	50	HGN20BX1	HGN20BX5	_	HGN20BX
НОТ	GAL	_VANIZE	D						
1-1/2"	4d	.080″	.219"	Smooth	450	HGN4HGBX1	HGN4HGBX5	_	HGN4HGBX
1-3/4"	5d	.080″	.219"	Smooth	390	HGN5HGBX1	HGN5HGBX5	HGN5HGBXBK	_
2"	6d	.099"	.266"	Smooth	220	HGN6HGBX1	HGN6HGBX5	_	HGN6HGBX
2-1/4"	7d	.099″	.266"	Smooth	200	HGN7HGBX1	HGN7HGBX5	HGN7HGBXBK	HGN7HGBX
2-1/2"	8d	.113"	.297"	Smooth	140	HGN8HGBX1	HGN8HGBX5	HGN8HGBXBK	HGN8HGBX
3"	10d	.128″	.312"	Smooth	90	HGN10HGBX1	HGN10HGBX5	HGN10HGBXBK	HGN10HGBX
3-1/4"	12d	.128″	.312"	Smooth	83	HGN12HGBX1	HGN12HGBX5	HGN12HGBXBK	HGN12HGBX
3-1/2"	16d	.135″	.344"	Smooth	69	HGN16HGBX1	HGN16HGBX5	HGN16HGBXBK	HGN16HGBX
4"	20d	.148″	.375″	Smooth	50	HGN20HGBX1	HGN20HGBX5	_	HGN20HGBX
OUT	DOC	R GALV	ANIZED						
1-1/4"	3d	.076"	.219"	Smooth	590	HGN3OGBX1	HGN3OGBX5	_	_
1-1/2"	4d	.080″	.219"	Smooth	450	HGN4OGBX1	HGN4OGBX5	_	_
1-3/4"	5d	.080″	.219"	Smooth	390	HGN5OGBX1	HGN5OGBX5	_	HGN5OGBX
2"	6d	.099"	.266"	Smooth	220	HGN6OGBX1	HGN6OGBX5	_	_
2-1/4"	7d	.099″	.266"	Smooth	200	HGN7OGBX1	HGN7OGBX5	_	_
2-1/2"	8d	.113"	.297"	Smooth	140	HGN8OGBX1	HGN8OGBX5	_	_
3"	10d	.128″	.312"	Smooth	90	HGN100GBX1	HGN100GBX5	_	HGN100GBX
3-1/4"	12d	.128″	.312"	Smooth	83	HGN12OGBX1	HGN12OGBX5	_	_
3-1/2"	16d	.135″	.344"	Smooth	69	HGN16OGBX1	HGN16OGBX5	_	_
4"	20d	.148″	.375"	Smooth	50	HGN20OGBX1	HGN20OGBX5	_	_

Stainless Steel Box Nail also available - see Huttig-Guard section for details.

Common Nail

For heavy-duty general construction and framing.

- Most versatile and popular style of nail
- · Heavier shank provides greater resistance to bending
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17















Siz	ze	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIC	SHT								
1-1/2"	4d	.099"	.250"	Smooth	290	HGN4C1	HGN4C5	_	HGN4C
2"	6d	.113″	.266"	Smooth	167	HGN6C1	HGN6C5	HGN6CBK	HGN6C
2-1/2"	8d	.131"	.281"	Smooth	104	HGN8C1	HGN8C5	HGN8CBK	HGN8C
3"	10d	.148"	.312"	Smooth	66	HGN10C1	HGN10C5	HGN10CBK	HGN10C
3-1/4"	12d	.148"	.312"	Smooth	61	HGN12C1	HGN12C5	HGN12CBK	HGN12C
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16C1	HGN16C5	HGN16CBK	HGN16C
4"	20d	.192"	.406"	Smooth	30	HGN20C1	HGN20C5	HGN20CBK	HGN20C
4-1/2"	30d	.207"	.438"	Smooth	23	_	HGN30C5	_	HGN30C
5″	40d	.226"	.469"	Smooth	17	_	HGN40C5	_	HGN40C
6"	60d	.262"	.531"	Smooth	11	_	HGN60C5	_	HGN60C
VINY	<mark>/L C</mark>	DATED							
2-1/2"	8d	.131"	.281″	Smooth	150	_	_	_	HGN8CC
3-1/2"	16d	.148"	.312"	Smooth	47	_	_	_	HGN16CC
ELEC	CTRC	GALVA	ANIZED						
2-1/2"	8d	.131"	.281″	Smooth	150	_	_	_	HGN8EGC
3-1/4"	12d	.148"	.312"	Smooth	61	_	_	_	HGN12EGC
3-1/2"	16d	.162″	.344"	Smooth	47	_	_	_	HGN16EGC
НОТ	GAL	VANIZE	.D						
2"	6d	.113"	.250"	Smooth	170	HGN6HGC1	HGN6HGC5	HGN6HGCBK	HGN6HGC
2-1/4"	7d	.113"	.266"	Smooth	150	HGN7HGC1	HGN7HGC5	_	_
2-1/2"	8d	.131"	.266"	Smooth	150	HGN8HGC1	HGN8HGC5	HGN8HGCBK	HGN8HGC
3"	10d	.148"	.312"	Smooth	66	HGN10HGC1	HGN10HGC5	HGN10HGCBK	HGN10HGC
3-1/4"	12d	.148"	.312"	Smooth	61	HGN12HGC1	HGN12HGC5	HGN12HGCBK	HGN12HGC
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16HGC1	HGN16HGC5	HGN16HGCBK	HGN16HGC
4"	20d	.192"	.406"	Smooth	30	HGN20HGC1	HGN20HGC5	HGN20HGCBK	HGN20HGC
5"	40d	.226"	.469"	Smooth	17	_	HGN40HGC5	_	HGN40HGC
6"	60d	.262"	.531"	Smooth	11	_	HGN60HGC5	_	HGN60HGC
OUT	DOO	R GALV	ANIZED						
2"	6d	.113″	.250"	Smooth	170	HGN6OGC1	HGN6OGC5	_	_
2-1/2"	8d	.131"	.281"	Smooth	150	HGN8OGC1	HGN8OGC5	_	_
3"	10d	.148″	.312"	Smooth	66	HGN100GC1	HGN100GC5	_	_
3-1/4"	12d	.148"	.312"	Smooth	61	HGN12OGC1	HGN12OGC5	_	_
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16OGC1	HGN16OGC5	_	_
4"	20d	.192"	.406"	Smooth	30	HGN20OGC1	HGN20OGC5	_	_
6"	60d	.262"	.531"	Smooth	11	_	HGN60OGC5	_	_

Joist Hanger Nail

For attaching joist hangers to wood ledgers, headers and beams.

- · Heavy gauge allows more surface contact and greater holding power
- Flat head seats flush against surface
- · Diamond point

Available Finishes









Size	Gauge	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIG	HT							
2-1/2"	8	0.313"	Smooth	_	_	HGN2128JH5	_	_
1-1/4"	9	0.313"	Smooth	_	HGN1149JH1	HGN1149JH5	_	_
1-1/2"	9	0.313"	Smooth	125	HGN1129JH1	HGN1129JH5	HGN1129JHBK	HGN1129JH
1-1/4"	10	0.281"	Smooth	194	HGN11410JH1	HGN11410JH5	_	_
1-1/2"	10	0.281"	Smooth	165	HGN11210JH1	HGN11210JH5	HGN11210JHBK	HGN11210JH
1-1/4"	11	0.281"	Smooth	_	HGN11411JH1	HGN11411JH5	_	_
НОТ	GALV	ANIZED						
2-1/2"	8	.313"	Smooth	62	HGN2128HGJH1	HGN2128HGJH5	_	_
1-1/4"	9	.313"	Smooth	_	HGN1149HGJH1	HGN1149HGJH5	_	HGN1149HGJH
1-1/2"	9	.281"	Smooth	_	HGN1129HGJH1	HGN1129HGJH5	HGN1129HGJBK	HGN1129HGJH
1-1/2"	10	.281"	Smooth	165	HGN11210HGJH1	HGN11210HGJH5	HGN11210HGJBK	HGN11210HGJH
1-1/4"	11	.281″	Smooth	_	HGN11411HGJH1	HGN11411HGJH5	_	_
OUTI	DOOR	GALVAI	VIZED					
1-1/4"	9	.313"	Smooth	_	HGN1149OGJH1	HGN1149OGJH5	_	_
1-1/2"	9	.313"	Smooth	125	HGN1129OGJH1	HGN1129OGJH5	_	HGN1129OGJH
1-1/4"	10	.281″	Smooth	194	HGN11410OGJH1	HGN11410OGJH5	_	HGN11410OGJH
1-1/2"	10	.281"	Smooth	165	HGN11210OGJH1	HGN112100GJH5	_	HGN11210OGJH
1-1/4"	11	.281″	Smooth	_	HGN114110GJH1	HGN114110GJH5	_	HGN11411OGJH

Stainless Steel Joist Hanger Nail also available - see Huttig-Guard section for details.



Sinker

For heavy-duty general construction and framing.

- Checkered head to reduce hammer slipping
- Flat, countersunk head
- Diamond point
- Conforms to ASTM F1667-17







Siz	е	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
VINY	L C	DATED							
1-1/8"	3d	_	_	Smooth	940	HGN3CSKR1	HGN3CSKR5	_	_
1-3/8"	4d	.080″	.203"	Smooth	530	HGN4CSKR1	HGN4CSKR5	_	HGN4CSKR
1-7/8"	6d	.092"	.234"	Smooth	290	HGN6CSKR1	HGN6CSKR5	_	HGN6CSKR
2-3/8"	8d	.113"	.266"	Smooth	150	HGN8CSKR1	HGN8CSKR5	HGN8CSKRBK	HGN8CSKR
2-7/8"	10d	.120″	.281"	Smooth	110	HGN10CSKR1	HGN10CSKR5	HGN10CSKRBK	HGN10CSKR
3-1/8"	12d	.135"	.312"	Smooth	81	HGN12CSKR1	HGN12CSKR5	HGN12CSKRBK	HGN12CSKR
3-1/4"	16d	.148″	.344"	Smooth	64	HGN16CSKR1	HGN16CSKR5	HGN16CSKRBK	HGN16CSKR
3-3/4"	20d	.177"	.375"	Smooth	40	HGN20CSKR1	HGN20CSKR5	_	HGN20CSKR



Spike

For securing timbers and other similar landscaping materials.

- · Checkered head to reduce hammer slipping
- Flat, countersunk head
- Diamond point
- Conforms to ASTM F1667-17









-				
Size	Shank	Approx. count / lb.	5 lb. Box 5 / shipper	50 lb. Box
BRIGHT				
8"	Smooth	19	HGN8SPK5	HGN8SPK
10"	Smooth	16	HGN10SPK5	HGN10SPK
12"	Smooth	13	HGN12SPK5	HGN12SPK
HOT GAL	VANIZE	D		
8"	Smooth	19	HGN8HGSPK5	HGN8HGSPK
10"	Smooth	16	HGN10HGSPK5	HGN10HGSPK
12"	Smooth	13	HGN12HGSPK5	HGN12HGSPK
OUTDOO	R GALVA	ANIZED		
8"	Smooth	19	_	HGN8OGSPK
10"	Smooth	16	_	HGN100GSPK
12"	Smooth	13	_	HGN12OGSPK

Timber Tie

For securing timbers and other similar landscaping materials.

- · Flat head sits flush against surface
- Diamond point

Size		Shank Diameter	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master
НОТ	GAL	VANIZEI)			
6"	60d	.1205"	.4375"	Spiral	10	HGN60HGTT5

Available Finish




Cut Masonry Nail

For attaching furring strips and other materials to cinder block, mortar joints, fresh concrete and brick walls.

- Tempered hardened steel for harder, less brittle nail
- · Blunt point and tapered shank minimize splitting in wood
- · Flat, rectangular head



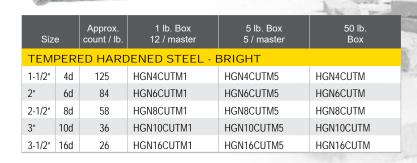

Fluted Masonry Nail

For attaching wood furring strips, studs, or floor plates to fresh concrete.

- Tempered hardened steel for harder, less brittle nail
- · Flutes help to minimize cracking and allow debris to surface
- Flat head sits flush against surface
- Diamond point





						12 40	323 (0)
Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
TEMPER	ED HAR	DENED	STEEL -	BRIGHT			
3/4"	.148″	.313"	Fluted	230	HGN34FM1	HGN34FM5	HGN34FM
1"	.148"	.131"	Fluted	176	HGN1FM1	HGN1FM5	HGN1FM
1-1/4"	.148"	.131"	Fluted	150	HGN114FM1	_	_
1-1/2"	.148"	.131"	Fluted	129	HGN112FM1	HGN112FM5	HGN112FM
2"	.148"	.131"	Fluted	95	HGN2FM1	HGN2FM5	HGN2FM
2-1/2"	.148"	.131"	Fluted	77	HGN212FM1	HGN212FM5	HGN212FM
3"	.148"	.131"	Fluted	68	HGN3FM1	HGN3FM5	HGN3FM
3-1/2"	.162"	.344"	Fluted	48	HGN312FM1	HGN312FM5	HGN312FM

Available Finish

EG

ELECTRO

Masonry Stub Nail

For applications where a smooth masonry style nail is required.

- Tempered hardened steel for harder, less brittle nail
- Larger head compared to standard masonry nails
- Smooth shank
- · Diamond point



						A CONTRACTOR OF THE PARTY OF TH	
Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
TEMI	PERED	HARDEN	NED STE	EL - ELE	CTRO GALVANI	ZED	
3/8"	9	3/8"	Smooth	391	HGN38EGSTB1	HGN38EGSTB5	HGN38EGSTB
1/2"	9	3/8"	Smooth	335	HGN12EGSTB1	HGN12EGSTB5	_
3/4"	9	3/8"	Smooth	248	HGN34EGSTB1	HGN34EGSTB5	HGN34EGSTB

Round Cap Fluted Masonry Nail

For attaching base sheet or foam insulation to masonry block, parapets, and concrete substrates.

- Tempered hardened steel for harder, less brittle nail
- Flutes help to minimize cracking and allow debris to surface



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	3 lb. Box 5 / master	25 lb. Box
TEMI	PERED	HARDEN	ED STEE	EL - BRIG	SHT	
1-1/4"	8	1"	Fluted	249	HGN114RDTHFM3	HGN114RDTHFM
1-1/2"	8	1"	Fluted	210	HGN112RDTHFM3	HGN112RDTHFM
1-3/4"	8	1"	Fluted	183	HGN134RDTHFM3	HGN134RDTHFM
2-1/2"	8	1"	Fluted	123	HGN212RDTHFM3	HGN212RDTHFM

BRT

Available Finish

Pole Barn Nail

For attaching wall framing lumber to pole barn posts.

- Tempered hardened steel for harder, less brittle nail
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17









Size		Gauge	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	50 lb. Box
TEMPERED HARDENED STEEL - BRIGHT							
4"	20d	.177"	.375″	Ring	35	HGN20RSPB5	HGN20RSPB
5″	40d	.177"	.375″	Ring	27	HGN40RSPB5	HGN40RSPB
6"	60d	.207"	.469"	Ring	23	HGN60RSPB5	HGN60RSPB
TEMPERED HARDENED STEEL - HOT GALVANIZED							
4"	20d	_	_	Ring	35	HGN20HGRSPB5	HGN20HGRSPB
5″	40d	_	_	Ring	27	HGN40HGRSPB5	HGN40HGRSPB
6"	60d	_	_	Ring	23	HGN60HGRSPB5	HGN60HGRSPB



Available Finish


Cu

Copper Roofing Nail

For installation of slate, tile and copper roofing.

- Also known as copper slating nails
- Shank diameter fits pre-formed tile and slate holes
- Larger head covers tile holes
- Top quality CDA-110 copper
- · Conforms to ASTM B49





Tile Roofing Nail

For securing roofing tiles.

- Oversized head provides expanded holding power to hold down roofing tiles
- · Long shank inserts through holes pre-drilled in tile
- · Diamond point

Available Finish







Metal Cap Nail

For attaching tar paper, felt paper, synthetic underlayment, housewrap, insulation foam board, and built-up and modified roofing.

- Oversized head, ringed shank provide enhanced holding power
- · Diamond point
- Complies to ASTM F1667-17







Size	Gauge	Head	Shank	Approx.	3 lb. Box 5 / master	25 lb. Box	50 lb. Box
ELEC	TRO GA	LVANIZ	ED				
1″	12	Round	Ring	110	HGN1MRC3	HGN1MRC25	_
1-1/4"	12	Round	Ring	100	HGN114MRC3	HGN114MRC25	HGN114MRC
1-1/2"	12	Round	Ring	96	HGN112MRC3	HGN112MRC25	HGN112MRC
1-3/4"	12	Round	Ring	94	HGN134MRC3	HGN134MRC25	_
2"	12	Round	Ring	90	HGN2MRC3	HGN2MRC25	_
2-1/2"	11	Round	Ring	80	HGN212MRC	HGN212MRC25	_
3″	11	Round	Ring	70	_	HGN3MRC25	HGN3MRC
7/8"	12	Square	Ring	110	HGN78MSQC3	HGN78MSQC25	_
1″	12	Square	Ring	110	HGN1MSQC3	HGN1MSQC25	_
1-1/4"	12	Square	Ring	100	HGN114MSQC3	HGN114MSQC25	_

Tin Caps

For use with fasteners for increased bearing surface with materials such as felt paper or sheets of foam board-type insulation products.

G-GRIP



Approx Siz		Thickness	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
Medium	2"	0.200 mm	156	HGNMEDTIN1	HGNMEDTIN5	HGNMEDTIN
Large	2-1/2"	0.200 mm	102	HGNLARGETIN1	HGNLARGETIN5	HGNLARGETIN

Plastic Cap Nail

For attaching tar paper, felt paper, synthetic underlayment, housewrap, and insulation foam board.

- Plastic cap helps to reduce pull-through and tears in building materials and other substrates
- Designed to distribute maximum holding power to the perimeter of the cap
- · Diamond point
- Complies to ASTM F1667-17



					1		L. I. T.		
Size	Shank Diameter	Cap Diameter	Head	Shank	Approx. count / lb.	1 lb. Box 5 / master	Bucket	Bucket Quantity	2,000 piece Box
ELEC	CTRO GA	ALVANIZ	ED						
3/4"	.106"	1"	Round	Ring	362	_	HGN34PCBK	3,000	HGN34PC
7/8"	.106"	1"	Round	Ring	339	HGN78PC1	HGN78PCBK	3,000	HGN78PC
1″	.106"	1"	Round	Ring	323	HGN1PC1	HGN1PCBK	3,000	HGN1PC
1-1/4"	.106"	1"	Round	Ring	269	HGN114PC1	HGN114PCBK	2,500	HGN114PC
1-1/2"	.106"	1"	Round	Ring	185	HGN112PC1	HGN112PCBK	2,500	HGN112PC
1-3/4"	.106"	1"	Round	Ring	168	HGN134PC1	HGN134PCBK	2,000	_
2"	.106"	1"	Round	Ring	153	HGN2PC1	HGN2PCBK	2,000	HGN2PC
2-1/2"	.106"	1"	Round	Ring	133	HGN212PC1	HGN212PCBK	2,000	HGN212PC
3″	.106"	1"	Round	Ring	117	HGN3PC1	HGN3PCBK	1,500	HGN3PC



Available Finish



Roofing Nail

For attaching roofing felt, insulation board, or asphalt shingles.

- Electro galvanized also used for hanging vinyl siding
- Large, flat head and heavy gauge for greater holding power
- Diamond point
- Conforms to ASTM F1667-17









Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
ELEC	TRO G	ALVANI	ZED	·					
3/4"	11	.120"	.375"394"	Smooth	323	HGN34EGRF1	HGN34EGRF5	HGN34EGRFBK	_
7/8"	11	.120"	.375"394"	Smooth	300	HGN78EGRF1	HGN78EGRF5	HGN78EGRFBK	HGN78EGRF
1"	11	.120"	.281"394"	Smooth	261	HGN1EGRF1	HGN1EGRF5	HGN1EGRFBK	HGN1EGRF
1-1/4"	11	.120"	.312"394"	Smooth	209	HGN114EGRF1	HGN114EGRF5	HGN114EGRFBK	HGN114EGRF
1-1/2"	11	.120"	.375"394"	Smooth	194	HGN112EGRF1	HGN112EGRF5	HGN112EGRFBK	HGN112EGRF
1-3/4"	11	.120"	.375"394"	Smooth	155	HGN134EGRF1	HGN134EGRF5	HGN134EGRFBK	HGN134EGRF
2"	11	.120"	.375"394"	Smooth	136	HGN2EGRF1	HGN2EGRF5	HGN2EGRFBK	HGN2EGRF
2-1/2"	11	.120"	.375"394"	Smooth	109	HGN212EGRF1	HGN212EGRF5	HGN212EGRFBK	HGN212EGRF
3″	11	.120"	.375"394"	Smooth	92	HGN3EGRF1	HGN3EGRF5	HGN3EGRFBK	HGN3EGRF
НОТ	GALVA	NIZED							
3/4"	11	.120"	.375"394"	Smooth	315	HGN34HGRF1	HGN34HGRF5	HGN34HGRFBK	HGN34HGRF
7/8″	11	.120"	.375"394"	Smooth	288	HGN78HGRF1	HGN78HGRF5	_	HGN78HGRF
1"	11	.120"	.375"394"	Smooth	254	HGN1HGRF1	HGN1HGRF5	HGN1HGRFBK	HGN1HGRF
1-1/4"	11	.120"	.375"394"	Smooth	196	HGN114HGRF1	HGN114HGRF5	HGN114HGRFBK	HGN114HGRF
1-1/2"	11	.120"	.375"394"	Smooth	163	HGN112HGRF1	HGN112HGRF5	HGN112HGRFBK	HGN112HGRF
1-3/4"	11	.120"	.375"394"	Smooth	148	HGN134HGRF1	HGN134HGRF5	HGN134HGRFBK	HGN134HGRF
2"	11	.120"	.375"394"	Smooth	120	HGN2HGRF1	HGN2HGRF5	HGN2HGRFBK	HGN2HGRF
2-1/2"	11	.120"	.375"394"	Smooth	106	HGN212HGRF1	HGN212HGRF5	HGN212HGRFBK	HGN212HGRF
3"	11	.120"	.375"394"	Smooth	90	HGN3HGRF1	HGN3HGRF5	HGN3HGRFBK	HGN3HGRF

Stainless Steel Roofing Nail also available - see Huttig-Guard section for details.

Aluminum Roofing Nail with Neoprene Washer

For attaching corrugated metal and fiberglass panels.

- Neoprene-bonded washer creates a seal against the surface, prevents moisture from entering the hole
- · Ring shank for enhanced holding power
- · Diamond point
- Manufactured from the highest quality 5056 aluminum
- · High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 5 / master
ALUN	IINUM				
1-3/4"	.134"	7/16"	Ring	368	HGN134ALNEO1

Roofing Nail with Neoprene Washer

For attaching corrugated metal and fiberglass panels.

- Neoprene-bonded washer creates a seal against the surface, prevents moisture from entering the hole
- · Ring shank for enhanced holding power
- · Diamond point



Size	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master			
ELEC	ELECTRO GALVANIZED								
1-1/2"	.135"	.375"	Ring	118	HGN112EGRNEO1	HGN112EGRNEO5			
1-3/4"	.135″	.375"	Ring	107	HGN134EGRNEO1	HGN134EGRNEO5			
2"	.135"	.375"	Ring	96	HGN2EGRNEO1	HGN2EGRNEO5			
нот о	HOT GALVANIZED								
1-3/4"	.135″	.375"	Ring	107	HGN134HGRNEO1	HGN134HGRNEO5			

Available Finish



Available Finishes





Shake Nail

For attaching wood shake.



Size	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master
НОТ	GALVA	NIZED				
1-3/4"	.080"	.156″	Ring	404	HGN134HGRSSHK1	HGN134HGRSSHK5
2"	.080"	.156″	Ring	354	HGN2HGRSSHK1	HGN2HGRSSHK5
1-3/4"	.080"	.156″	Smooth	404	HGN134HGSHK1	HGN134HGSHK5

Stainless Steel Shake Nail also available - see Huttig-Guard section for details.





Shingle Nail

For attaching wood shingles.



	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
HOT	GALVAI	VIZED					
1-1/4"	.092"	.250"	Smooth	425	HGN114HGSHGL1	HGN114HGSHGL5	_
1-3/8"	.099"	.281"	Smooth	345	HGN138HGSHGL1	HGN138HGSHGL5	HGN138HGSHGL
1-1/2"	.106"	.281"	Smooth	271	HGN112HGSHGL1	HGN112HGSHGL5	_

Available Finish



Available Finish

Aluminum Siding Nail

For attaching aluminum, vinyl, or steel siding.

- · Large, flat head for greater holding power
- · Diamond point
- Manufactured from the highest quality 5056 aluminum
- · High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails






No-Split Wood Siding Nail

For use with split-prone woods.

- · Thin shank and blunt point minimize splitting in wood
- · Ring shank for enhanced holding power
- Diamond point
- Conforms to ASTM F1575-17



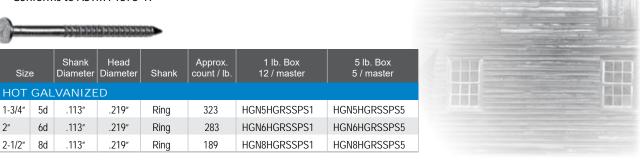

Stainless Steel No-Split Wood Siding Nail also available - see Huttig-Guard section for details.

Wood and Hardboard Siding Nail

For attaching wood and hardboard siding.

- Checkered head for paint adherence
- Stiffened shank for enhanced holding power
- Diamond point
- Conforms to ASTM F1575-17










Size	e	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket
НОТ	GAL	VANIZE	D					
2"	6d	.113"	.219″	Smooth	173	HGN6HGHBS1	HGN6HGHBS5	_
2-1/4"	7d	.113"	.219"	Smooth	156	HGN7HGHBS1	HGN7HGHBS5	_
2-1/2"	8d	.113"	.219″	Smooth	140	HGN8HGHBS1	HGN8HGHBS5	_
3"	10d	.113"	.219"	Smooth	108	HGN10HGHBS1	HGN10HGHBS5	_
3-1/4"	12d	.113"	.219″	Smooth	92	HGN12HGHBS1	HGN12HGHBS5	_
3-1/2"	16d	.113"	.219"	Smooth	80	HGN16HGHBS1	HGN16HGHBS5	_
2"	6d	.113"	.219″	Spiral	173	HGN6HGSTHBS1	HGN6HGSTHBS5	_
2-1/4"	7d	.113"	.219"	Spiral	156	HGN7HGSTHBS1	HGN7HGSTHBS5	_
2-1/2"	8d	.113"	.219"	Spiral	140	HGN8HGSTHBS1	HGN8HGSTHBS5	HGN8HGSTHBSBK
3"	10d	.113"	.219"	Spiral	108	HGN10HGSTHBS1	HGN10HGSTHBS5	_
3-1/2"	16d	.113"	.219″	Spiral	80	HGN16HGSTHBS1	HGN16HGSTHBS5	_
OUT	000	R GALV	ANIZED					
2"	6d	.113"	.219"	Smooth	173	HGN6OGHBS1	HGN6OGHBS5	_
2-1/4"	7d	.113"	.219"	Smooth	156	HGN7OGHBS1	HGN7OGHBS5	_
2-1/2"	8d	.113"	.219″	Smooth	140	HGN8OGHBS1	HGN8OGHBS5	_
2-1/2"	8d	.113"	.219″	Spiral	140	HGN8OGSTHBS1	HGN8OGSTHBS5	_



Aluminum Trim Nail

For attaching redwood and cedar soffit, fascia, and aluminum trim coil.

- · Diamond point
- Manufactured from the highest quality 5056 aluminum
- High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails
- Available painted with premium baked enamel paints.

Available Finish



Siz	:e	Gauge	Shank Diameter	Head Diameter	Shank	Approx.	Color	1 lb. Box 5 / master
ALUI	MINU	JM						
1-1/4"	3d	13	.099"	3/16"	Smooth	1,090	Brown	HGN114ALTRBW1
1-1/4"	3d	13	.099"	3/16"	Smooth	1,090	White	HGN114ALTRWH1

Stainless Steel Trim Nail also available - see Huttig-Guard section for details.





Furring Nail

For attaching stucco wire mesh to the exterior wall for application of stucco mud

- For use with wire lath with wadding attached
- Smooth, flat head
- · Diamond point



Size	Shank	Approx. count / lb.	50 lb. Box			
ELECTRO GALVANIZED						
1-1/2"	Smooth	155	HGN112FUR			
1-3/4"	Smooth	152	HGN134FUR			

Furring Nail with wad

For attaching stucco wire mesh to the exterior wall for application of stucco mud.

- For use with flat wire lath that is not furred (wadding is not pre-attached)
- Spacer on the nail creates a gap between the wire lath and the wall for space for the cement
- Smooth, flat head
- Diamond point



Size	Shank	Approx. count.	300 Count Box 5 / master				
ELECTRO GALVANIZED							
1-1/2"	Smooth with wad	300	HGN112FURWW300				
1-3/4"	Smooth with wad	300	HGN134FURWW300				

Available Finish







Fine Nail

For use with thin pieces of wood.

- Smooth, slender nail to minimize splitting narrow strips of wood
- · Smooth, flat head
- Diamond point


Available Finishes







Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box		
ELECTRO GALVANIZED									
1-1/8" 3d	.062"	.156″	Smooth	757	HGN3EGFINE1	HGN3EGFINE5	HGN3EGFINE		
HOT GAL	VANIZE	ED .							
1-1/8" 3d	.062"	.156″	Smooth	757	HGN3HGFINE1	HGN3HGFINE5	_		
OUTDOOR GALVANIZED									
1-1/8" 3d	.062"	.156″	Smooth	757	HGN3OGFINE1	HGN3OGFINE5	_		

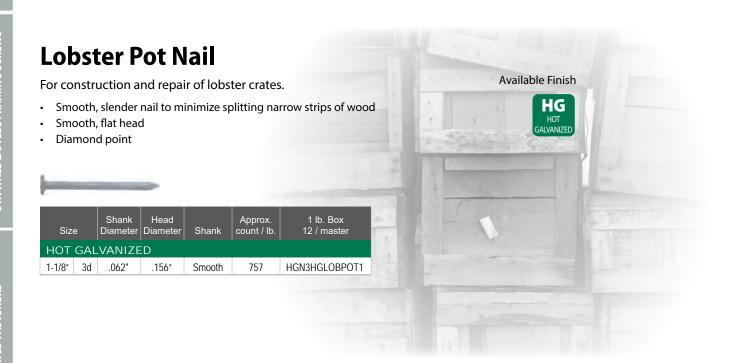

Application & Finishes

FINISH RECOMMENDATIONS							
Stainless Steel 304 Limited Lifetime Warranty	LIFETIME STAINLESS LIMITED WARRANTY	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, and redwood.				
Stainless Steel 316 Limited Lifetime Warranty	STAINLESS LIMITED WARRANTY	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, redwood, and marine				

Stainless Steel Deck Nail

For deck, patio, fence, and other outdoor construction.

- · Flat head seats flush against surface
- Ring shank for use in softer woods and where vibration may be a factor
- Spiral shank for use with harder woods and near board ends to minimize splitting
- Diamond point






Siz	е	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
STAI	STAINLESS STEEL GRADE 304								
2-1/2"	8d	10	.134"	9/32"	Ring	122	HGG8SSRSDK1	HGG8SSRSDK5	HGG8SSRSDKBK
3"	10d	9	.148"	5/16"	Ring	67	HGG10SSRSDK1	HGG10SSRSDK5	_
3-1/2"	16d	8	.165"	11/32"	Ring	58	HGG16SSRSDK1	HGG16SSRSDK5	_

Stainless Steel Box Nail



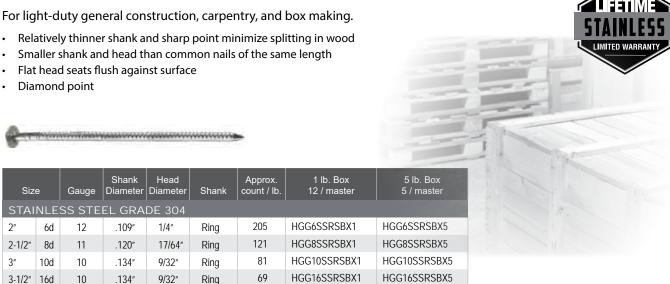


Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Stainless Steel Joist Hanger Nail

For attaching joist hangers to wood ledgers, headers and beams.

- Heavy gauge allows more surface contact and greater holding power
- Flat head seats flush against surface
- Diamond point







Stainless Steel Roofing Nail

For attaching asphalt, dimensional, or wood shingles.

- Large, flat head and larger shank diameter for greater holding power
- Ring shank for enhanced holding power

· Diamond point



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	
STAINLE	STAINLESS STEEL GRADE 304								
7/8"	10	.134"	3/8"	Ring	242	HGG78SSRRF1	_	_	
1″	10	.134"	3/8"	Ring	207	HGG1SSRRF1	HGG1SSRRF5	HGG1SSRRF	
1-1/4"	10	.134"	3/8"	Ring	171	HGG114SSRRF1	HGG114SSRRF5	HGG114SSRRF	
1-1/2"	10	.134"	3/8"	Ring	149	HGG112SSRRF1	HGG112SSRRF5	HGG112SSRRF	
1-3/4"	10	.134"	3/8"	Ring	131	_	HGG134SSRRF5	_	
2"	10	.134"	3/8"	Ring	117	HGG2SSRRF1	HGG2SSRRF5	HGG2SSRRF	
2-1/2"	10	.134"	3/8"	Ring	96	HGG212SSRRF1	HGG212SSRRF5	HGG212SSRRF	


Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Stainless Steel No-Split Wood Siding Nail

For use with split-prone woods.

- Small, checkered head for low glare or paint adherence
- Ring shank for enhanced holding power
- · Diamond point





Siz	re	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
STAINLESS STEEL GRADE 304									
1-1/2"	4d	14	.083"	.1562"	Ring	398	HGG4SSRSSPS1	HGG4SSRSSPS5	HGG4SSRSSPSBK
1-3/4"	5d	13	.095"	.1875"	Ring	355	HGG5SSRSSPS1	HGG5SSRSSPS5	HGG5SSRSSPSBK
2"	6d	13	.095"	.1875″	Ring	245	HGG6SSRSSPS1	HGG6SSRSSPS5	HGG6SSRSSPSBK
2-12"	8d	13	.095"	.1875"	Ring	196	HGG8SSRSSPS1	HGG8SSRSSPS5	HGG8SSRSSPSBK
3"	10d	12	.109"	.2031"	Ring	120	HGG10SSRSSPS1	HGG10SSRSSPS5	HGG8SSRSSPSBK

Stainless Steel Shake Nail

For attaching wood shake.

- Thin ring shank offers better holding and reduces wood splitting
- · Manufactured with larger heads to eliminate nail pull through
- · Diamond point
- · Ring shank



9										
Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket		
STAINLI	STAINLESS STEEL GRADE 304									
1-3/4" 5d	14	0.083"	1/8"	Ring	346	HGG134SSSHK1	HGG134SSSHK5	HGG134SSSHKBK		
STAINLESS STEEL GRADE 316										
1-3/4" 5d	14	0.083"	1/8"	Ring	346	HGG134SSSHK61	HGG134SSSHK65	HGG134SSSHK6BK		

Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Stainless Steel Trim Nail

For attaching soffit, fascia, and other cedar, aluminum, vinyl, or composite exterior trim.

- · Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- · Smaller, smooth head for inconspicuous finish
- · Available painted with premium baked enamel paints



	Br	own				White		
Size		Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	Color	1 lb. Box 12 / master
STAI	NLE	SS STEI	EL GRA	DE 304				
1-1/4"	3d	15	.072"	11/64	Smooth	637	Brown	HGG114SSTRBW1
1-1/4"	3d	15	.072"	11/64	Smooth	637	White	HGG114SSTRWH1



38 www.huttig.com

Wood & Exterior Screws

HUTTIG-GRIP™ HUTTIG-GUARD™

Wood Screw Features & Benefits	40-4
Huttig-Grip	4
Application & Finish	
Wood-to-Wood	4
Huttig-Guard	42
Application & Finishes	42
Huttig-Guard Comparison	43
Decking - Stainless Steel	
Decking - Platinum Lifetime	4!
Decking - Premium 50 Year	46
Decking - Pro 15 Year	
Composite Deck Screw Color Chart	
Composite Decking - Premium 50 Year	
Trim - Stainless Steel	
Trim - Platinum Lifetime	5

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

HUTTIG-GRIP & HUTTIG-GUARD WOOD SCREWS

Huttig delivers the most complete mix of wood screws designed specifically for interior or outdoor applications.

All Huttig wood screws are designed to provide superior penetration, grip and strength—all while reducing effort, head-pops, breaks and splitting.



HEAD

Huttig-Grip All Purpose and Huttig-Guard outdoor screws have flat heads with nibs, while others use bugle heads.

- Flat head -
 - designed for use with wood; bugle head is best for drywall applications, tucks drywall paper under the head
 - dramatically reduces head pops when driving fasteners into wood; bugle head intended to sink into softer materials, prone to breaking especially when used with harder woods
- Nibs help to "seat" the head into wood for flat, smooth installation surface
- HUTTIG-GUARD Platinum Outdoor Screws feature a Double Countersink Flat head with Nibs for ultimate seating in wood



DRIVE

Huttig-Grip All Purpose and Huttig-Guard screws have a star drive versus Phillips.

- Star drive is a "positive" drive; keeps driving tool in place, even with high torque
- 12-point contact with bit
- Eliminates head spin outs
- FREE star drive bit with all Huttig-Guard screws





THREAD

Huttig-Grip All Purpose and Huttig-Guard wood screws have coarse, serrated thread.*

Serrated threads reduce the torque needed to drive the screw without reducing holding power
 *Huttig-Guard Stainless Steel screws are coarse thread.




KNURLED SHANK

HUTTIG-GUARD Platinum Outdoor Screws feature a knurled shank; reams hole in board reducing drag on shank & driving tool for faster, easier penetration



POINT

Huttig-Grip All Purpose and Huttig-Guard screws have a Type 17 point versus standard sharp point.



- "Drills" through wood; penetrates some of the hardest woods faster, eliminates splitting at board ends
- Quickly starts wood penetration without "walking", also cuts wood fibers when driving for faster initial installation times



 Designed for use with thicker pieces of hardwood where more material will be displaced, fluting helps to move chips out of the hole



GAUGE

Huttig-Grip all purpose and Huttig-Guard wood screws are made of heavy gauge wire.

- Superior holding power
- Eliminates head pops and screws breaking during drilling

40 www.huttig.com

Available Finish

ΥZ

HUTTIG-GRIP

Application & Finish

APPLICATION	FINISH RECOMMENDATIONS						
General Construction	YZ YELLOW ZINC	Yellow zinc coating applied to fastener; smooth, shiny finish.	Zinc plating provides minimal protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.			

All Purpose Screw

For all wood-to-wood applications.

- 12-point star drive for better engagement, more torque
- Flat head with nibs for fewer head pops, smoother finish
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods
















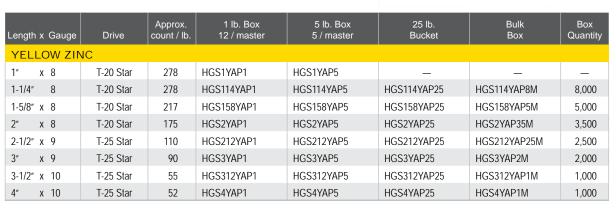



Application & Finishes

FINISH RECOMMENDATIONS								
Professional Limited 15 Year Warranty	Limited 15 year fastener warranty.	Recommended for outdoor applications and with treated lumber.						
Premium Limited 50 Year Warranty	Limited 50 year fastener warranty.	Recommended for outdoor applications and with treated lumber.						
Platinum Limited Lifetime Warranty	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber.						
Stainless Steel 305 Limited Lifetime Warranty	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, and redwood.						
Stainless Steel 316 Limited Lifetime Warranty	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, redwood, and marine						

HUTTIG-GUARD



42 www.huttig.con

Huttig-Guard Screw Comparison

FINIS	SH	STAINLESS STEEL	PLATINUM	PREMIUM	PROFESSIONAL
WAR	RANTY	UFETIME STAINLESS UNITE WARRANY	PLATINUM United WARRANT	PREMIUM PREMIUM	PROFESSIONAL MINITO WARRANT
	HEAD	FLAT HEAD WITH NIBS	DOUBLE COUNTERSINK FLAT HEAD WITH NIBS	FLAT HEAD WITH NIBS	FLAT HEAD WITH NIBS
O U T	DRIVE	STAR DRIVE	STAR DRIVE	STAR DRIVE	STAR DRIVE
D O	THREAD	COARSE	COARSE SERRATED THREAD	COARSE SERRATED THREAD	COARSE SERRATED THREAD
O R	POINT	TYPE 17 POINT	TYPE 17 LONG POINT	TYPE 17 POINT	TYPE 17 POINT
	SHANK		KNURLED SHANK		
	HEAD	TRIM HEAD WITH NIBS	TRIM HEAD WITH NIBS		
Т	DRIVE	STAR DRIVE	STAR DRIVE		
R	THREAD	COARSE	COARSE SERRATED THREAD		
M	POINT	TYPE 17 POINT	TYPE 17 LONG POINT		
	SHANK		KNURLED SHANK		
C	HEAD			MUSHROOM HEAD	
M P O	DRIVE			STAR DRIVE	
S	THREAD			TRIPLE	
T E	POINT			TYPE 17 POINT	

Stainless Steel Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head with nibs for fewer head pops, smoother finish
- Coarse thread cuts through wood
- Type 17 point drills own hole, easier to drive into hardwoods
- · Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details















Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity			
STAINLESS STEEL GRADE 305										
1-1/4" x 8	T-20 Star	202	HGG114SS1	HGG114SS5	HGG114SS25	HGG114SS8M	8,000			
1-5/8" x 8	T-20 Star	161	HGG158SS1	HGG158SS5	HGG158SS25	HGG158SS5M	5,000			
2" x 8	T-20 Star	135	HGG2SS1	HGG2SS5	HGG2SS25	HGG2SS35M	3,500			
2-1/2" x 9	T-25 Star	99	HGG212SS1	HGG212SS5	HGG212SS25	HGG212SS25M	2,500			
3" x 9	T-25 Star	82	HGG3SS1	HGG3SS5	HGG3SS25	HGG3SS2M	2,000			
3-1/2" x 10	T-25 Star	60	HGG312SS1	HGG312SS5	HGG312SS25	HGG312SS1M	1,000			
4" x 10	T-25 Star	53	HGG4SS1	HGG4SS5	HGG4SS25	HGG4SS1M	1,000			
STAINLESS	STEEL GRA	DE 316								
1-1/4" x 8	T-20 Star	202	HGG114161	HGG114165	HGG114SS1625	HGG114SS168M	8,000			
1-5/8" x 8	T-20 Star	161	HGG158161	HGG158165	HGG158SS1625	HGG158SS165M	5,000			
2" x 8	T-20 Star	135	HGG2161	HGG2165	HGG2SS1625	HGG2SS1635M	3,500			
2-1/2" x 9	T-25 Star	99	HGG212161	HGG212165	HGG212SS1625	HGG212SS1625M	2,500			
3" x 9	T-25 Star	82	HGG3161	HGG3165	HGG3SS1625	HGG3SS162M	2,000			
3-1/2" x 10	T-25 Star	60	HGG312161	HGG312165	HGG312SS1625	HGG312SS161M	1,000			
4" x 10	T-25 Star	53	HGG4161	HGG4165	HGG4SS1625	HGG4SS161M	1,000			



Platinum Outdoor Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head with nibs for fewer head pops, smoother finish
- Coarse, serrated thread cuts through wood using less torque
- Knurled shank for reduced drag, faster, easier penetration*
- Type 17 long point designed for use with thicker pieces of hardwood
- Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details

















Available colors:

Bronze









Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
BRONZE							
1-1/4" x 8	T-20 Star	216	HGG114PLTBZ1	HGG114PLTBZ5	HGG114PLTBZ25	HGG114PLTBZ8M	8,000
1-5/8" x 8	T-20 Star	162	HGG158PLTBZ1	HGG158PLTBZ5	HGG158PLTBZ25	HGG158PLTBZ5M	5,000
2" x 8	T-20 Star	143	HGG2PLTBZ1	HGG2PLTBZ5	HGG2PLTBZ25	HGG2PLTBZ35M	3,500
2-1/2" x 9	T-25 Star	89	HGG212PLTBZ1	HGG212PLTBZ5	HGG212PLTBZ25	HGG212PLTBZ25M	2,500
3" x 9	T-25 Star	76	HGG3PLTBZ1	HGG3PLTBZ5	HGG3PLTBZ25	HGG3PLTBZ2M	2,000
3-1/2" x 10	T-25 Star	54	HGG312PLTBZ1	HGG312PLTBZ5	HGG312PLTBZ25	HGG312PLTBZ1M	1,000
4" x 10	T-25 Star	47	HGG4PLTBZ1	HGG4PLTBZ5	HGG4PLTBZ25	HGG4PLTBZ1M	1,000
5" x 10	T-25 Star	38	HGG5PLTBZ1	HGG5PLTBZ5	HGG5PLTBZ25	HGG5PLTBZ750	750
6" x 10	T-25 Star	32	HGG6PLTBZ1	HGG6PLTBZ5	HGG6PLTBZ25	HGG6PLTBZ600	600
GREEN							
1-1/4" x 8	T-20 Star	216	HGG114PLTGN1	HGG114PLTGN5	HGG114PLTGN25	HGG114PLTGN8M	8,000
1-5/8" x 8	T-20 Star	162	HGG158PLTGN1	HGG158PLTGN5	HGG158PLTGN25	HGG158PLTGN5M	5,000
2" x 8	T-20 Star	143	HGG2PLTGN1	HGG2PLTGN5	HGG2PLTGN25	HGG2PLTGN35M	3,500
2-1/2" x 9	T-25 Star	89	HGG212PLTGN1	HGG212PLTGN5	HGG212PLTGN25	HGG212PLTG25M	2,500
3" x 9	T-25 Star	76	HGG3PLTGN1	HGG3PLTGN5	HGG3PLTGN25	HGG3PLTGN2M	2,000
3-1/2" x 10	T-25 Star	54	HGG312PLTGN1	HGG312PLTGN5	HGG312PLTGN25	HGG312PLTGN1M	1,000
4" x 10	T-25 Star	47	HGG4PLTGN1	HGG4PLTGN5	HGG4PLTGN25	_	1,000
5" x 10	T-25 Star	38	HGG5PLTGN1	HGG5PLTGN5	HGG5PLTGN25	HGG5PLTGN750	750
6" x 10	T-25 Star	32	HGG6PLTGN1	HGG6PLTGN5	HGG6PLTGN25	HGG5PLTGN600	600

^{*} NOTE: Knurled shank not available on 1-1/4" screws

Premium Outdoor Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head with nibs for fewer head pops, smoother finish
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods
- 50 Year Limited Fastener Warranty. See www.huttig.com/warranty for complete details













Available colors:









•		•		•			
Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
BROWN							
1-1/4" x 8	T-20 Star	236	HGG114PREBN1	HGG114PREBN5	HGG114PREBN25	HGG114PREBN8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PREBN1	HGG158PREBN5	HGG158PREBN25	HGG158PREBN5M	5,000
2" x 8	T-20 Star	154	HGG2PREBN1	HGG2PREBN5	HGG2PREBN25	HGG2PREBN35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PREBN1	HGG212PREBN5	HGG212PREBN25	HGG212PREBN25M	2,500
3" x 9	T-25 Star	83	HGG3PREBN1	HGG3PREBN5	HGG3PREBN25	HGG3PREBN2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PREBN1	HGG312PREBN5	HGG312PREBN25	HGG312PREBN1M	1,000
4" x 10	T-25 Star	54	HGG4PREBN1	HGG4PREBN5	HGG4PREBN25	HGG4PREBN1M	1,000
GREEN							
1-1/4" x 8	T-20 Star	236	HGG114PREGN1	HGG114PREGN5	HGG114PREGN25	HGG114PREGN8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PREGN1	HGG158PREGN5	HGG158PREGN25	HGG158PREGN5M	5,000
2" x 8	T-20 Star	154	HGG2PREGN1	HGG2PREGN5	HGG2PREGN25	HGG2PREGN35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PREGN1	HGG212PREGN5	HGG212PREGN25	HGG212PREG25M	2,500
3" x 9	T-25 Star	83	HGG3PREGN1	HGG3PREGN5	HGG3PREGN25	HGG3PREGN2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PREGN1	HGG312PREGN5	HGG312PREGN25	HGG312PREGN1M	1,000
4" x 10	T-25 Star	54	HGG4PREGN1	HGG4PREGN5	HGG4PREGN25	HGG4PREGN1M	1,000
RED							
1-1/4" x 8	T-20 Star	236	HGG114PRERD1	HGG114PRERD5	HGG114PRERD25	_	8,000
1-5/8" x 8	T-20 Star	188	HGG158PRERD1	HGG158PRERD5	HGG158PRERD25	_	5,000
2" x 8	T-20 Star	154	HGG2PRERD1	HGG2PRERD5	HGG2PRERD25	_	3,500
2-1/2" x 9	T-25 Star	99	HGG212PRERD1	HGG212PRERD5	HGG212PRERD25	HGG212PRER25M	2,500
3" x 9	T-25 Star	83	HGG3PRERD1	HGG3PRERD5	HGG3PRERD25	HGG3PRERD2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PRERD1	HGG312PRERD5	HGG312PRERD25	HGG312PRERD1M	1,000
4" x 10	T-25 Star	54	HGG4PRERD1	HGG4PRERD5	HGG4PRERD25	HGG4PRERD1M	1,000
TAN							
1-1/4" x 8	T-20 Star	236	HGG114PRETN1	HGG114PRETN5	HGG114PRETN25	HGG114PRETN8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PRETN1	HGG158PRETN5	HGG158PRETN25	HGG158PRETN5M	5,000
2" x 8	T-20 Star	154	HGG2PRETN1	HGG2PRETN5	HGG2PRETN25	HGG2PRETN35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PRETN1	HGG212PRETN5	HGG212PRETN25	HGG212PRET25M	2,500
3" x 9	T-25 Star	83	HGG3PRETN1	HGG3PRETN5	HGG3PRETN25	HGG3PRETN2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PRETN1	HGG312PRETN5	HGG312PRETN25	HGG312PRETN1M	1,000
4" x 10	T-25 Star	54	HGG4PRETN1	HGG4PRETN5	HGG4PRETN25	HGG4PRETN1M	1,000

Professional Outdoor Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head with nibs for fewer head pops, smoother finish
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods
- 15 Year Limited Fastener Warranty. See www.huttig.com/warranty for complete details


















Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
GRAY							
1-1/4" x 8	T-20 Star	236	HGG114PRO1	HGG114PRO5	HGG114PRO25	HGG114PRO8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PRO1	HGG158PRO5	HGG158PRO25	HGG158PRO5M	5,000
2" x 8	T-20 Star	154	HGG2PRO1	HGG2PRO5	HGG2PRO25	HGG2PRO35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PRO1	HGG212PRO5	HGG212PRO25	HGG212PRO25M	2,500
3" x 9	T-25 Star	83	HGG3PRO1	HGG3PRO5	HGG3PRO25	HGG3PRO2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PRO1	HGG312PRO5	HGG312PRO25	HGG312PRO1M	1,000
4" x 10	T-25 Star	54	HGG4PRO1	HGG4PRO5	HGG4PRO25	HGG4PRO1M	1,000



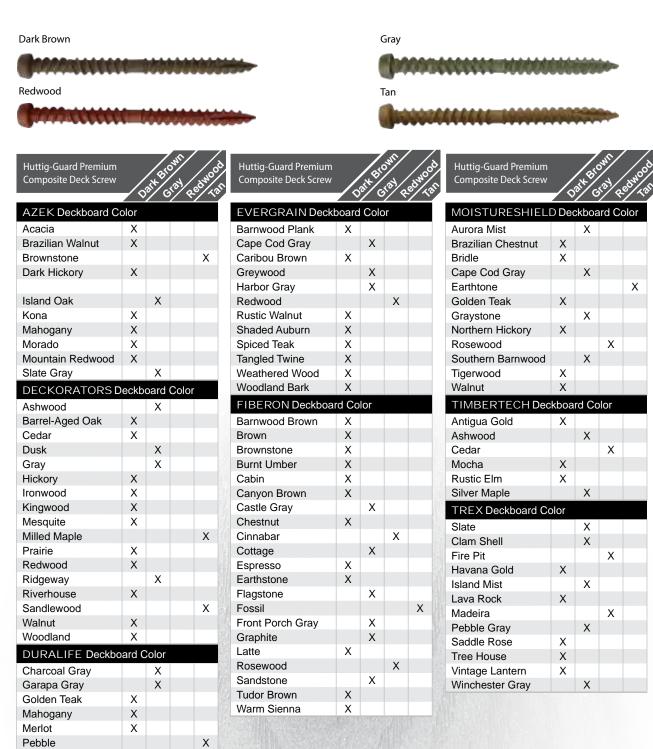

This chart is to be used as only a reference guide when choosing fastener colors and does not guarantee an exact color match

Huttig-Grip™ and Huttig Building Products, Inc. are trademarks of Huttig Building Products, Inc. Other product and company names listed may be trademarks of their respective owners. Huttig Building Products, Inc. is not affiliated with the other products and companies listed.

Saratoga Brown

Spanish Cedar

Tropical Walnut

Slate Gray

Χ

Χ

Χ

Χ

Premium Composite Deck Screw

For attaching composite decking to deck frame.

- 12-point star drive for better engagement, more torque
- Mushroom head not much larger than shank, designed to sink to the hole, trapping material beneath, eliminating head pop-ups on deck surface
- Triple-thread design traps material within the hole, away from surface
- · Type 17 point designed for use with dense, harder materials, elminates splitting at end of boards
- 50 Year Limited Fastener Warranty. See www.huttig.com/warranty for complete details














Available colors:



Length x Gauge	Drive	Approx. count / lb.	350 Piece Box 5 / master	1,750 Piece Bucket
DARK BROW	/N			•
2-3/4" x 9	T-20 Star	77	HGG234CDB350	HGG234CDB175M
GRAY				
2-3/4" x 9	T-20 Star	77	HGG234CGY350	HGG234CGY175M
REDWOOD				
2-3/4" x 9	T-20 Star	77	HGG234CRD350	HGG234CRD175M
TAN				
2-3/4" x 9	T-20 Star	77	HGG234CTN350	HGG234CTN175M

INSTALLATION TIP

- 350 piece installs 100 ft.²
 - 1,750 piece installs 500 ft.2



Stainless Steel Trim Screw

For attaching deck boards, railings, and trim.

- 12-point star drive for better engagement, more torque
- · Trim head for concealment
- Coarse thread cuts through wood
- Type 17 point drills own hole, easier to drive into hardwoods
- Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details



www.huttig.com













Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket				
STAINLESS STEEL GRADE 305									
1-5/8" x 9	T-20 Star	144	HGG158SSTRM1	HGG158SSTRM5	HGG158SSTRM25				
2-1/4" x 9	T-20 Star	104	HGG214SSTRM1	HGG214SSTRM5	_				
2-1/2" x 9	T-20 Star	95	HGG212SSTRM1	HGG212SSTRM5	HGG212SSTRM25				
3" x 9	T-20 Star	81	HGG3SSTRM1	HGG3SSTRM5	HGG3SSTRM25				
STAINLESS	STEEL GRA	DE 305 -	PAINTED WHIT	E					
1-5/8" x 9	T-20 Star	144	HGG158SSTRMWH1	_	_				
2-1/4" x 9	T-20 Star	104	HGG214SSTRMWH1	_	_				
STAINLESS	STEEL GRA	DE 316							
1-5/8" x 9	T-20 Star	144	HGG15816TRM1	HGG15816TRM5	HGG15816TRM25				
2-1/2" x 9	T-20 Star	95	HGG21216TRM1	HGG21216TRM5	HGG21216TRM25				
3" x 9	T-20 Star	81	HGG316TRM1	HGG316TRM5	HGG316TRM25				

Platinum Trim Screw

For attaching deck boards, railings, and trim.

- 12-point star drive for better engagement, more torque
- · Trim head for concealment
- · Coarse, serrated thread uses less torque to cut through wood
- · Knurled shank for reduced drag, faster, easier penetration
- Type 17 long point designed for use with thicker pieces of hardwood
- · Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details











97

82

T-20 Star

T-20 Star







HGG212PLTHGN5

HGG3PLTHGN5

HGG212PLTHG25M

HGG3PLTHG2M

Available colors:

Bronze

2-1/2" x 9

3"

x 9



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

HGG212PLTHGN1

HGG3PLTHGN1



2,500

2,000



52 www.huttig.com

Drywall & Steel Framing Screws

HUTTIG-GRIP® HUTTIG-SP§N®

Drywall & Steel Framing Fasteners	53
Drywal & Steel Framing Screw Attributes	54
Application & Finishes	
Huttig-Grip	56
Drywall	
Huttig-Spin	57
Drywall	58-60
Light Gauge	61-62
Heavy Gauge	63-65
Wood	
Cement Board	66

HUTTIG-GRIP & HUTTIG-SP N **DRYWALL & STEEL FRAMING SCREW ATTRIBUTES**

DRIVE



PHILLIPS DRIVE

Cross-shaped recess designed

to cam-out (bit slips out of the

drive) before being overdriven,

preventing screws breaking

from too much torque.



SQUARE DRIVE



STAR DRIVE

Bit fits into screw head, less likely to slip out. Screw stays on the bit, easier for one-handed fastening.

"Positive" drive; keeps driving tool in place, even with high torque. Eliminates head spinouts.

HEAD



BUGLE HEAD



FLAT HEAD WITH NIBS



MODIFIED TRUSS /WASHER HEAD



PAN **HEAD**



TRIM HEAD

Used with drywall and softer woods where head can sink just below surface, holding material beneath. Rounded edges, sloping neck prevent tearing of material.

and other similar materials. Flat head sits flush. Nibs help to "seat" the head for smoother finished surface.

Used with wood, cement board. Larger head diameter for holding material in place, low profile for applications with minimal clearance and/or minimized appearance.

For high-torque installations into wood or metal. Lower profile than oval or round screws, with a flat or slightly rounded top and vertical edaes.

Trim head for concealment.



WAFER HEAD



WAFER HEAD WITH NIBS



HEX WASHER HEAD



SLOTTED HEX WASHER HEAD



HEX HEAD WITH NEOPRENE WASHER

Used with wood, cement board, Used with wood, cement board, Hex head is preferred for and other similar materials. Flat, wider head sits flush while providing expanded bearing surface.

and other similar materials. Flat, wider head sits flush while providing expanded bearing surface. Nibs help to "seat" the head for smoother finish.

high-volume projects; relatively easy to engage, tighten, and loosen, supports more tightening torque than other head styles. Metal flange at base of head provides pull-through resistance.

Benefits of hex washer head, plus can also be driven with a standard/flat-blade screwdriver or bit.

Benefits of hex head, plus neoprene-bonded washer provides seal against moisture.

THREAD



FINE THREAD

Used with attaching to steel

pieces of wood. Threads are

finer, closer together, more

holding power compared to

precise; necessary when

and other metals and thin



COARSE



HIGH-LOW THREAD

Used with wood, cement board, Used with low-density and other similar materials. Coarse thread accepts more material between threads and is forgiving; more likely to drill working with thinner and/or and hold even if slightly dinged greater pull-out restistance. more brittle materials. Greater or otherwise blemished.

materials such as cement board. Thread design reduces the amount of required torque, reduces cracking, and has

coarse thread. **POINT**



SELF DRILL POINT



SHARP POINT



TYPE 17 POINT



Used when fastening to wood, woods. Flute in point helps to

SPADE POINT

Used to quickly bore holes through wood and similar materials.

Used when fastening to steel, other types of metal, and thin pieces of wood. Drills own pilot point into medium to heavy steel.

Used when fastening to wood and other medium to soft materials. May require drilling of pilot point.

especially denser, harder draw material out of the hole.

HUTTIG-GRIP & **HUTTIG-SP** N APPLICATION & FINISHES

APPLICATION	AVAILABLE FINISHES
For attaching drywall to wood	PC PHOSPHATE COATED
For attaching drywall and other materials to light-gauge steel	PC PHOSPHATE COATED ZP ZINC PLATED
For attaching drywall and other materials to heavy-gauge steel	PC PHOSPHATE COATED ZP ZINC PLATED
For attaching to wood	BRT
For attaching cement and fiber cement board	PREMIUM IMITEO WARRANTY

FINISH RECOMMENDATIONS									
BRT	Plain, "bright" steel without any additional protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.							
PC PHOSPHATE COATED PC PHOSPHATE COATED PC PHOSPHATE COATED	Iron phosphate coating created on the surface of the fastener to en- hance adhesion of paint and other finishes (drywall compound).	Phosphate coating provides minimal protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.						
ZP ZINC PLATED ZINC PLATED	Clear or yellow zinc coating applied to fastener; smooth, shiny finish.	Zinc plating provides minimal protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.						
PREMIUM INMIED WARRANTY	Limited 50 year fastener warranty.	Recommended for outdoor applications and with treated lumber.							



Available Finish

PC

Drywall Screw - Coarse Thread

For attaching sheets of drywall to wood studs.

- · Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, coarse thread for use with wood.











Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
PHOSPHATE	E COATED						
1" x 6	#2 Phillips	333	HGS1CDW1	HGS1CDW5	HGS1CDW25	HGS1CDW10M	10,000
1-1/8" x 6	#2 Phillips	306	HGS118CDW1	HGS118CDW5	_	HGS118CDW10M	10,000
1-1/4" x 6	#2 Phillips	278	HGS114CDW1	HGS114CDW5	HGS114CDW25	HGS114CDW8M	8,000
1-5/8" x 6	#2 Phillips	217	HGS158CDW1	HGS158CDW5	HGS158CDW25	HGS158CDW5M	5,000
2" x 6	#2 Phillips	175	HGS2CDW1	HGS2CDW5	HGS2CDW25	HGS2CDW35M	3,500
2-1/2" x 8	#2 Phillips	110	HGS212CDW1	HGS212CDW5	HGS212CDW25	HGS212CDW25M	2,500
3" x 8	#2 Phillips	90	HGS3CDW1	HGS3CDW5	HGS3CDW25	HGS3CDW2M	2,000
3-1/2" x 10	#2 Phillips	55	HGS312CDW1	HGS312CDW5	_	HGS312CDW1M	1,000
4" x 10	#2 Phillips	50	HGS4CDW1	HGS4CDW5	_	HGS4CDW1M	1,000

Drywall Screw - Fine Thread

For attaching sheets of drywall to light-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, fine thread for use with light gauge steel














Length x (Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
PHOSP	PHATE	COATED						
1" x	6	#2 Phillips	333	HGS1FDW1	HGS1FDW5	_	HGS1FDW10M	10,000
1-1/8" x	6	#2 Phillips	306	HGS118FDW1	HGS118FDW5	_	HGS118FDW10M	10,000
1-1/4" x	6	#2 Phillips	278	HGS114FDW1	HGS114FDW5	HGS114FDW25	HGS114FDW8M	8,000
1-5/8" x	6	#2 Phillips	217	HGS158FDW1	HGS158FDW5	HGS158FDW25	HGS158FDW5M	5,000
2" x	6	#2 Phillips	175	HGS2FDW1	HGS2FDW5	HGS2FDW25	HGS2FDW35M	3,500
2-1/2" x	8	#2 Phillips	110	HGS212FDW1	HGS212FDW5	HGS212FDW25	HGS212FDW25M	2,500
3" x	8	#2 Phillips	90	HGS3FDW1	HGS3FDW5	HGS3FDW25	HGS3FDW2M	2,000

56

HUTTIG-SP N - Designed for the Pro Contractor

■ Sourcing:

- Produced only in approved mills in Taiwan
- All packaging has mill and production codes for traceability
- **Testing:** Completed on all products
- Drywall screws sharp point coarse & fine thread
- Drywall screws self-drill bugle head
- Modified truss sharp point & self-drill
- Pan framers sharp point & self-drill
- Hex washer head screws sharp point & self-drill
- Cement board screws spade point & self-drill
- **Testing protocol:** Detailed process, includes sampling during production & pre-shipment full inspection report on every batch
- **Product specifications:** Developed to meet or exceed industry expectations, based upon extensive testing of competitive brands including Grabber, Pro-Twist, Hilti and ITW Buildex

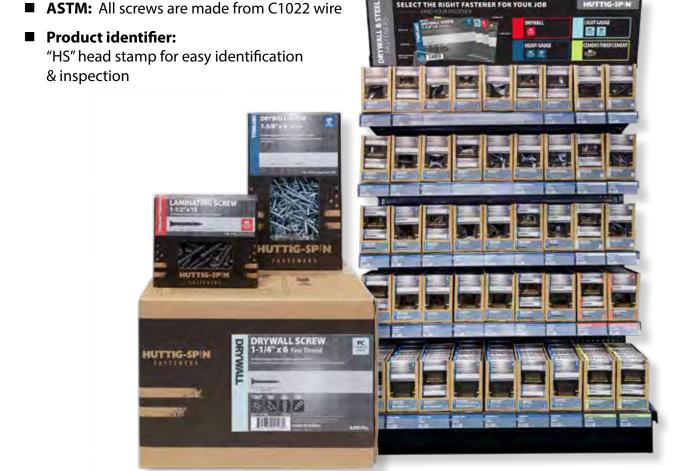

Huttig-Spin™ and Huttig Building Products, Inc. are trademarks of Huttig Building Products, Inc. Other product and company names listed may be trademarks of their respective owners. Huttig Building Products, Inc. is not affiliated with the other products and companies listed.

HUTTIG-SP[§]N[™]

Drywall Screw - Coarse Thread

For attaching gypsum board and wood to wood studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, coarse thread for use with wood



Available Finish











arrest tion	ORYWALL SCREW
COTTEG-SPOR	
	The second
-	Nill Control

Length	x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHO:	SPHATE	COATED						
1″	x 6	#2 Phillips	Sharp	343	_	_	HSP1CT10M	10,000
1-1/8"	x 6	#2 Phillips	Sharp	294	_	_	HSP118CT10M	10,000
1-1/4"	x 6	#2 Phillips	Sharp	278	_	_	HSP114CT8M	8,000
1-5/8"	x 6	#2 Phillips	Sharp	216	HSP158CT1	HSP158CT5	HSP158CT5M	5,000
2"	x 6	#2 Phillips	Sharp	186	_	HSP62CT5	HSP62CT35M	3,500
2-1/4"	x 7	#2 Phillips	Sharp	146	HSP214CT1	_	HSP214CT3M	3,000
2-1/2"	x 8	#2 Phillips	Sharp	110	HSP212CT1	_	HSP212CT25M	2,500
3"	x 8	#2 Phillips	Sharp	108	_	HSP3CT5	HSP3CT2M	2,000

Laminating Screw

For attaching layers of gypsum boards together.

- · Extra-heavy gauge for greater holding power
- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point for drilling through gypsum board and paper backing or into wood













Length x Gauge	Drive	Point	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE COATED							
1-1/2" x 10	#2 Phillips	Sharp	135	HSP112LAM1	HSP112LAM5	HSP112LAM5M	5,000





HUTTIG-SP[§]N[™]

Drywall Screw - Fine Thread

For attaching gypsum board to light-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, fine thread for use with light-gauge steel
















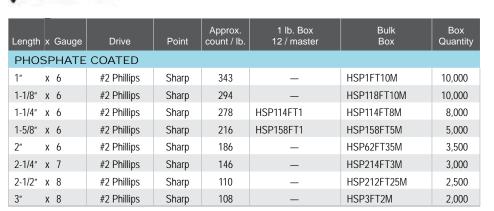

HUTTIG-SP[§]N[™]

Drywall Screw - Self-Drill

For attaching gypsum board to heavy-gauge steel studs.

- · Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Self-drill point, fine thread for use with steel



















Zinc Plated

Length	x Gauge	Drive	Point	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOS	SPHATE	COATED						
1-1/4"	x 6	#2 Phillips	Self-drill	255	HSPQ114DW1	HSPQ114DW5	HSPQ114DW8M	8,000
1-5/8"	x 6	#2 Phillips	Self-drill	211	HSPQ158DW1	HSPQ158DW5	HSPQ158DW5M	5,000
1-7/8"	x 6	#2 Phillips	Self-drill	178	HSPQ178DW1	HSPQ178DW5	HSPQ178DW4M	4,000
2-3/8"	x 8	#2 Phillips	Self-drill	105	HSPQ238DW1	HSPQ238DW5	HSPQ238DW3M	3,000
2-5/8"	x 8	#2 Phillips	Self-drill	96	_	HSPQ258DW5	HSPQ258DW2M	2,000
3"	x 8	#2 Phillips	Self-drill	84	_	HSPQ3DW5	HSPQ3DW2M	2,000
ZINC	PLATE	D						
1-1/8"	x 6	#2 Phillips	Self-drill	263	_	HSPQ118DWZ5	_	10,000
1-1/4"	x 6	#2 Phillips	Self-drill	255	HSPQ114DWZ1	HSPQ114DWZ5	HSPQ114DWZ8M	8,000
1-5/8"	x 6	#2 Phillips	Self-drill	211	HSPQ158DWZ1	HSPQ158DWZ5	HSPQ158DWZ5M	5,000
1-7/8"	x 6	#2 Phillips	Self-drill	178	HSPQ178DWZ1	HSPQ178DWZ5	HSPQ178DWZ4M	4,000
2-3/8"	x 8	#2 Phillips	Self-drill	105	HSPQ238DWZ1	HSPQ238DWZ5	HSPQ238DWZ3M	3,000
2-5/8"	x 8	#2 Phillips	Self-drill	96	HSPQ258DWZ1	HSPQ258DWZ5	HSPQ258DWZ2M	2,000
3"	x 8	#2 Phillips	Self-drill	84	_	HSPQ3DWZ5	HSPQ3DWZ2M	2,000

HUTTIG-SPIN

Modified Truss

For attaching metal lath to wood or light-gauge steel studs or where low profile is desired.

- Wide head holds material in place, low profile for use with low clearance and/or minimized appearance
- Sharp point, fine thread for use with light gauge steel







3"

2-1/2" x 8

x 8











Tracente and traces to									
Length	x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity	
ZINC	PLATE	D							
1/2"	x 8	#2 Phillips	Sharp	273	HSP12MDTR1	HSP12MDTR5	HSP12MDTR10M	10,000	
3/4"	x 8	#2 Phillips	Sharp	216	HSP34MDTR1	HSP34MDTR5	HSP34MDTR8M	8,000	
1″	x 8	#2 Phillips	Sharp	183	HSP1MDTR1	HSP1MDTR5	HSP1MDTR5M	5,000	
1-1/4"	x 8	#2 Phillips	Sharp	156	HSP114MDTR1	HSP114MDTR5	HSP114MDTR5M	5,000	
1-5/8"	x 8	#2 Phillips	Sharp	128	HSP158MDTR1	HSP158MDTR5	HSP158MDTR5M	5,000	
1-7/8"	x 8	#2 Phillips	Sharp	118	_	HSP178MDTR5	HSP178MDTR4M	4,000	
2"	x 8	#2 Phillips	Sharp	110	HSP2MDTR1	HSP2MDTR5	HSP2MDTR25M	2,500	

HSP212MDTR5

Pan Framer

For attaching light-gauge steel track to light-gauge steel studs where high torque is required.

HSP212MDTR1

Pan framer head allows relatively high torque with wide base to keep material in place

91

78

Sharp

Sharp

Sharp point, fine thread for use with light gauge steel

#2 Phillips

#2 Phillips
















Enlarged to show detail





HSP212MDTR2M

HSP3MDTR15M

2,000

1,500

HUTTIG-SP[§]N[™]

Trim Head Screw

For attaching wood trim over single and double layer gypsum board to light-gauge steel or wood.

- · Trim head for concealment
- · Sharp point, fine thread for use with light gauge steel













Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE	COATE)					
1-5/8" x 6	#2 Square	Sharp	214	HSP158TRM1	HSP158TRM5	HSP158TRM5M	5,000
2-1/4" x 6	#2 Square	Sharp	156	HSP214TRM1	_	HSP214TRM3M	3,000

HUTTIG-SP[§]N[™]

Hex Washer Head Screw - Self-Drill

10 Gauge for attaching medium-gauge sheet metal such as HVAC to steel framing. 12 Gauge for attaching purlins and channels to structural studs.

- Hex head for high torque, flange at base prevents pull-through
- · Self-drill point, fine thread for use with steel




Available Finish











Modified Truss - Self-Drill

For attaching metal lath to heavy-gauge steel studs or where low profile is desired.

- Wide head holds material in place, low profile for use with low clearance and/or minimized appearance
- Self-drill point, fine thread for use with steel
















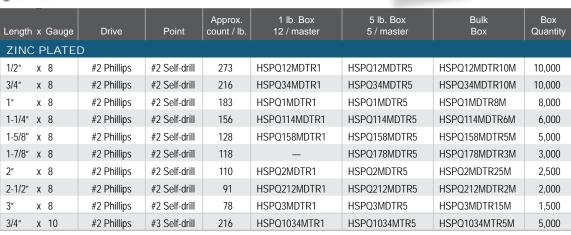





Pan Framer - Self-Drill

For attaching heavy-gauge steel track to heavy-gauge steel studs where high torque is required.

- Pan framer head allows relatively high torque with wide base to keep material in place
- Self-drill point, fine thread for use with steel

Available Finishes



















Phosphate Coated

Zinc Plated

Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE	COATED						
7/16" x 7	#2 Phillips	#2 Self-drill	363	HSPQ716PN1	HSPQ716PN5	_	_
ZINC PLATE	ZINC PLATED						
7/16" x 7	#2 Phillips	#2 Self-drill	363	HSPQ716PNZ1	HSPQ716PNZ5	HSPQ716PNZ15M	15,000

Trim Head Screw - Self-Drill

For attaching wood trim over single and double layer gypsum board to heavy-gauge steel.

- Trim head for concealment
- · Self-drill point, fine thread for use with steel













Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
PHOSPHATE	COATED				
1-5/8" x 6	#2 Square	#2 Self-drill	214	HSPQ158TRM1	HSPQ158TRM5
2-1/4" x 6	#2 Square	#2 Self-drill	156	HSPQ214TRM1	HSPQ214TRM5



HUTTIG-SP[§]N[™]

Eye Lag Screw - Self-Drill

For attaching wire to steel studs for suspended ceiling grid.

· Self-drill point, fine thread for use with steel

Available Finish







Length	Hole Size	Approx. count / lb.	Bulk Box	Box Quantity
ZINC P	LATED			
2"	1/4"	_	HSPQ2LAGEYE1M	1,000

Eye Lag Screw

For attaching wire to wood joists for suspended ceiling grid.

· Coarse thread for use with wood





Length	Hole Length Size		Bulk Box	Box Quantity
BRIGH ⁻	Γ			
3"	1/4"	38	HSP3LAGEYE1M	1,000

HUTTIG-SP!N"

Cement Board Screw - Self-Drill

For attaching cement board to heavy-gauge steel studs.

- Flat head sits flush, nibs help to "seat" head in surface
- Self-drill point, fine thread for use with steel
- Limited 50 year Premium finish fastener warranty













Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity		
50 YEAR PR	50 YEAR PREMIUM WARRANTY							
1-5/8" x 8	T-20 Star	135	HSPQ158CBNB1	HSPQ158CBNB5	HSPQ158CBNB5M	5,000		

50 Year Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Cement Board Screw - Spade Point

For attaching cement board to wood or to light-gauge steel studs.

- Flat head sits flush, nibs help to "seat" head in surface
- Spade point bores through cement board without cracking
- High-low thread for easier drilling with greater pull-out resistance
- Limited 50 year Premium finish fastener warranty















Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
50 YEAR PRI	EMIUM WARI	RANTY				
1-1/4" x 8	T-20 Star	181	HSP114CBSP1	HSP114CBSP5	_	_
1-5/8" x 8	T-20 Star	147	HSP158CBSP1	HSP158CBSP5	HSP158CBSP5M	5,000

50 Year Limited Fastener Warranty. See www.huttig.com/warranty for complete details.



68 www.huttig.com

Collated Fasteners

HUTTIG-GRIP™ HUTTIG-GUARD™

Collated Fasteners	69
Application & Finishes	7(
Icon Chart	
Handler Cale	
Huttig-Grip	
How to read the Huttig-Grip collated nail item numbers	
Roofing	/:
Framing	
Framing - Pallets/Crates	
Metal Connectors	8
Siding/Fence	82
How to read the Huttig staple item numbers	
Staples - Wide	
Staples - Medium	8!
Staples - Narrow	
Staples - Tacker	87
How to read the Huttig Finish & Brad nail item numbers	88
Finish & Trim Nails	89-90
Huttig-Guard Stainless Steel	9 [.]
Roofing - Stainless Steel	9.
Framing - Stainless Steel	
Siding/Fence - Stainless Steel	9
Staples - Stainless Steel	
Finish & Trim Nails - Stainless Steel	
Specialty Programs	Q
Tub Program	
Box Program - Staples, Finish & Fine Wire	
Clamshell Program - Finish & Fine Wire	95
Collated Fastener/Tool Compatibility Guide	100

Application & Finishes

APPLICATION		AVAIL	ABLE FIN	IISHES	
General Construction	BRT				
Outdoor Construction		EG ELECTRO GALVANIZED	HG HOT GALVANIZED	OG OUTDOOR GALVANIZED	
Roofing & Siding		EG ELECTRO GALVANIZED	HG HOT GALVANIZED		
Stainless Steel					UFFTIME STAINLESS LIMITED WARRANTY

FINISH RECOMMENDATIONS							
BRT	Plain, "bright" steel without any additional protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.					
EG ELECTRO GALVANIZED ELECTRO GALVANIZED ELECTRO GALVANIZED GALVANIZED	Zinc plating bonded to steel with electrical charges; smooth, shiny finish.	Electro galvanization provides moderate protection against corrosion.	Recommended for outdoor applications excluding treated lumber.				
HG HOT GALVANIZED HOT GALVANIZED	Hot zinc applied to fastener for thicker, more durable coating; rougher, sometimes darker finish.	Hot galvanization provides significant protection against corrosion.	Recommended for outdoor applications and with treated lumber.				
OG OUTDOOR GALVANIZED	Multi-step process; zinc applied to fastener followed by a variety of methods to harden the coating for additional protection.	Outdoor galvanization provides significant protection against corrosion, equal to or better than hot galvanization.	Recommended for outdoor applications and with treated lumber.				
UFETIME STAINLESS IMPTED WARRANTY	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, and redwood.					

0 www.huttig.com

Match fasteners to the same icon on the tool and vice versa



How to read the Huttig collated nail item numbers






















Collation Type	Code	Nail Length	Code	Shank Diameter	Code	Coating/Finish/Properties	Code	Shank Type	Code	Point	Code	Pieces	Code
0° Plastic Sheet	Α	1″	Α	.135″	0	HG Heat Treated	N	Ring	W	Standard	В	1,000	1M
15° Plastic Sheet	В	1-1/4"	В	.080"	Р	Bright High Carbon	0	Smooth	Χ	Blunt Chisel	С	2,000	2M
15° Wire	С	1-1/2"	С	.083"	Q	HG High Carbon	Р	Spiral	Υ	Blunt Diamond	D	2,500	25M
21° Plastic	D	1-3/4"	D	.086"	R	Bright Heat Treated	Q	Screw	Z			3,000	3M
28° Plastic	Е	1-7/8″	Е	.090"	S	Bright	R					4,000	4M
28° CH Wire	F	2"	F	.092"	T	EG – Electro Galvanized	S					5,000	5M
28° RH Wire	G	2-1/8"	G	.099"	U	HG – Hot Galvanized	T						
30° CH Paper	ı	2-1/4"	Н	.113″	V	304 Stainless Steel	U						
30° Paper Joist	J	2-3/16"	I	.120″	W	316 Stainless Steel	V						
30° RH Paper	L	2-3/8"	J	.131"	Χ	OG – Outdoor Galvanized	W						
30° Plastic Joist	М	2-1/2"	K	.148″	Υ								
Specialty Collation	N	2-3/4"	L	.162"	Z								
		3"	М										
		3-1/4"	N										
		3-3-8"	0										
		3-1/2"	Р										

CH=Clipped Head RH=Round Head

Example:

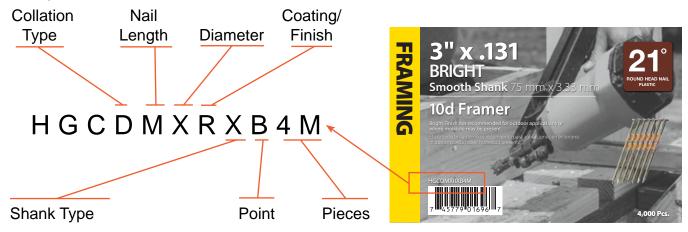



7/8"

1"

1-1/2" 1-3/4"

1-1/4"

.120"

.120"

.120"

.120"

.120"

Smooth

Smooth

Smooth

Smooth

Ring

Coil Roofing Nails

Length	Shank Diameter	Tub r Shank 840 Piece		Box 7,200 Piece
ELECT	RO GAL	VANIZED)	
3/4"	.120″	Smooth	HGC34EGCRFGT	HGC34EGCRFG
7/8"	.120″	Smooth	HGC78EGCRFGT	HGC78EGCRFG
1″	.120"	Smooth	HGC1EGCRFGT	HGC1EGCRFG
1-1/4"	.120″	Smooth	HGC114EGCRFGT	HGC114EGCRFG
1-1/2"	.120"	Smooth	HGC112EGCRFGT	HGC112EGCRFG
1-3/4"	.120"	Smooth	HGC134EGCRFGT	HGC134EGCRFG
3/4"	.120"	Ring	_	HGC34EGRCRFG
7/8"	.120"	Ring	_	HGC78EGRCRFG
1"	.120"	Ring	_	HGC1EGRCRFG
1-1/4"	.120"	Ring	_	HGC114EGRCRFG
1-1/2"	.120"	Ring	_	HGC112EGRCRFG
1-3/4"	.120"	Ring	_	HGC134EGRCRFG
HOT GA	ALVANIZ	ZED		
3/4"	.120"	Smooth	_	HGC34HGCRFG

Available Finishes







Stainless Steel Coil Roofing Nails also available - see Huttig-Guard collated fasteners section for details.

HGC78HGCRFG

HGC1HGCRFG

HGC112HGCRFG

HGC134HGCRFG

HGC114HGRCRFG





21° Plastic Strip Round Head











Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 5,000 Piece
BRIGH	Т					
2"	.113"	Smooth	HGCDFVRXB1M	_	_	HGCDFVRXB5M
2-1/4"	.148"	Smooth	HGCDHYRXB1M	_	HGCDHYRXB4M	_
2-3/8"	.113"	Smooth	HGCDJVRXB1M	_	_	HGCDJVRXB5M
2-3/8"	.148"	Smooth	HGCDJYRXB1M	_	HGCDJYRXB4M	_
2-1/2"	.131"	Smooth	HGCDKXRXB1M	_	HGCDKXRXB4M	HGCDKXRXB5M
3"	.120"	Smooth	HGCDMWTWB1M	_	HGCDMWRXB4M	_
3"	.131"	Smooth	HGCDMXRXB1M	_	HGCDMXRXB4M	_
3"	.148"	Smooth	_	_	HGCDMYRXB4M	_
3-1/4"	.131"	Smooth	HGCDNXRXB1M	_	HGCDNXRXB4M	_
3-1/4"	.148"	Smooth	_	HGCDNYRXB3M	_	_
3-1/2"	.162"	Smooth	_	HGCDPZRXB3M	_	
2-3/8"	.113"	Ring	HGCDJVRWB1M	_	_	HGCDJVRWB5M
2-1/2"	.131"	Ring	_	_	_	HGCDKXRWB5M
2-3/8"	.148"	Screw	_	_	HGCDJYRZB4M	_
ELECT	RO GAL	VANIZE)			
2"	.113"	Smooth	_	_	_	HGCDFVSXB5M
2-3/8"	.113"	Smooth	_	_	_	HGCDJVSXB5M
3"	.131"	Smooth	_	_	HGCDMXSXB4M	_
3-1/4"	.131"	Smooth	_	_	HGCDNXSXB4M	
2"	.113"	Ring	_	_	_	HGCDFVSWB5M
2-3/8"	.113"	Ring	_	_	_	HGCDJVSWB5M
3"	.131"	Ring	_	_	HGCDMXSWB4M	_





21° Plastic Strip Round Head - continued











Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 5,000 Piece
HOT GA	ALVANIZ	ZED				
2"	.113″	Smooth	HGCDFVTXB1M	_	_	HGCDFVTXB5M
2-1/4"	.148"	Smooth	_	_	HGCDHYTXB4M	_
2-3/8"	.113″	Smooth	_	_	_	HGCDJVTXB5M
2-3/8"	.148"	Smooth	_	_	HGCDJYTXB4M	_
2-1/2"	.131"	Smooth	HGCDKXTXB1M	_	HGCDKXTXB4M	HGCDKXTXB5M
3″	.120"	Smooth	_	_	HGCDMWTXB4M	_
3"	.131"	Smooth	HGCDMXTXB1M	_	HGCDMXTXB4M	_
3-1/4"	.120"	Smooth	_	_	HGCDNWTXB4M	_
3-1/4"	.131"	Smooth	HGCDNXTXB1M	_	HGCDNXTXB4M	_
3-1/2"	.162"	Smooth	_	HGCDPZTXB3M	_	_
2"	.113″	Ring	HGCDFVTWB1M	_	_	HGCDFVTWB5M
2-3/8"	.113"	Ring	HGCDJVTWB1M	_	_	HGCDJVTWB5M
3"	.120″	Ring	HGCDMWTWB1M	_	HGCDMWTWB4M	_
3-1/4"	.131"	Ring	_	_	HGCDNXTWB4M	_
3-1/4"	.120"	Screw	_	_	HGCDNWTZB4M	_
OUTDC	OR GAL	VANIZE	D			
2"	.113″	Smooth	_	_	_	HGCDFVWXB5M
2-3/8"	.113″	Smooth	_	_	_	HGCDJVWXB5M
2-1/2"	.131"	Smooth	_	_	_	HGCDKXWXB5M
3"	.120"	Smooth	_	_	HGCDMWWXB4M	_
3"	.131"	Smooth	_	_	HGCDMXWXB4M	_
3-1/4"	.131"	Smooth	_	_	HGCDNXWXB4M	_
2"	.113″	Ring	_	_	_	HGCDFVWWB5M
2-3/8"	.113″	Ring	_	_	_	HGCDJVWWB5M
3″	.120"	Ring	_	_	HGCDMWWWB4M	_
3-1/4"	.131"	Ring	_	_	HGCDNXWWB4M	_



28° Wire Weld Offset Round Head







Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece
BRIGH [*]	Г				
2"	.113″	Smooth	HGCGFVRXB1M	_	HGCGFVRXB25M
2-3/8"	.113″	Smooth	HGCGJVRXB1M	_	HGCGJVRXB25M
3"	.120″	Smooth	HGCGMWRXB1M	HGCGMWRXB2M	_
3"	.131"	Smooth	HGCGMXRXB1M	HGCGMXRXB2M	_
3-1/4"	.120″	Smooth	HGCGNWRXB1M	HGCGNWRXB2M	_
3-1/4"	.131"	Smooth	HGCGNXRXB1M	HGCGNXRXB2M	_
2-3/8"	.113"	Ring	HGCGJVRWB1M	_	HGCGJVRWB25
OUTDO	OR GAL	VANIZE	D		
2"	.113"	Smooth	HGCGFVWXB1M	_	HGCGFVWXB25M
2-3/8"	.113"	Smooth	HGCGJVWXB1M	_	HGCGJVWXB25M
3"	.120″	Smooth	HGCGMWWXB1M	HGCGMWWXB2M	_
3-1/4"	.131"	Smooth	HGCGNXWXB1M	HGCGNXWXB2M	_
2"	.113"	Ring	HGCGFVWWB1M	_	HGCGFVWWB25M
2-3/8"	.113"	Ring	HGCGJVWWB1M	_	HGCGJVWWB25M
3"	120"	Ring	HGCGMWWWR1M	HGCGMWWWB2M	_





30° Paper Tape Clipped Head

 Can be used with 30° - 34° Paper Tape Framing Nailer













Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	
BRIGH [*]	Т					
2"	.113"	Smooth	HGCIFVRXB1M	_	HGCIFVRXB25M	
2-3/8"	.113"	Smooth	HGCIJVRXB1M	_	HGCIJVRXB25M	
3"	.120"	Smooth	HGCIMWRXB1M	HGCIMWRXB2M	HGCIMWRXB25M	
3"	.131"	Smooth	HGCIMXRXB1M	HGCIMXRXB2M	HGCIMXRXB25M	
3-1/4"	.120"	Smooth	HGCINWRXB1M		HGCINWRXB25M	
3-1/4"	.131"	Smooth	HGCINXRXB1M	HGCINXRXB2M	HGCINXRXB25M	
2-3/8"	.113"	Ring	HGCIJVRWB1M	_	HGCIJVRWB25M	
HOT G	ALVANIZ	ZED				
2"	.113"	Smooth	HGCIFVTXB1M	_	HGCIFVTXB25M	
2-3/8"	.113"	Smooth	HGCIJVTXB1M	_	HGCIJVTXB25M	
3"	.120"	Smooth	HGCIMWTXB1M	HGCIMWTXB2M	HGCIMXWXB25M	
3"	.131"	Smooth	HGCIMXTXB1M	HGCIMXTXB2M	_	
3-1/4"	.131"	Smooth	HGCINXTXB1M	HGCIMXTXB2M	_	
2"	.113"	Ring	HGCIFVTWB1M	_	HGCIFVTWB25M	
2-3/8"	.113"	Ring	HGCIJVTWB1M	_	HGCIJVTWB25M	
3"	.120"	Ring	HGCIMWTWB1M	HGCIMWTWB2M	HGCIMWWWB25M	
OUTDO	OR GAL	VANIZE	D			
2"	.113"	Smooth	_	_	HGCIFVWXB25M	
2-3/8"	.113"	Smooth	_	_	HGCIJVWXB25M	
3"	.131"	Smooth	_	HGCIMXWXB2M	_	
3-1/4"	.131"	Smooth	_	HGCINXWXB2M	_	
2"	.113"	Ring	_	_	HGCIFVWWB25M	
2-3/8"	.113"	Ring	_	_	HGCIJVWWB25M	
3"	.120"	Ring	_	HGCIMWWWB2M	_	
3-1/4"	.120"	Ring	_	HGCINWWWB2M		
					MIN MI 175 2	

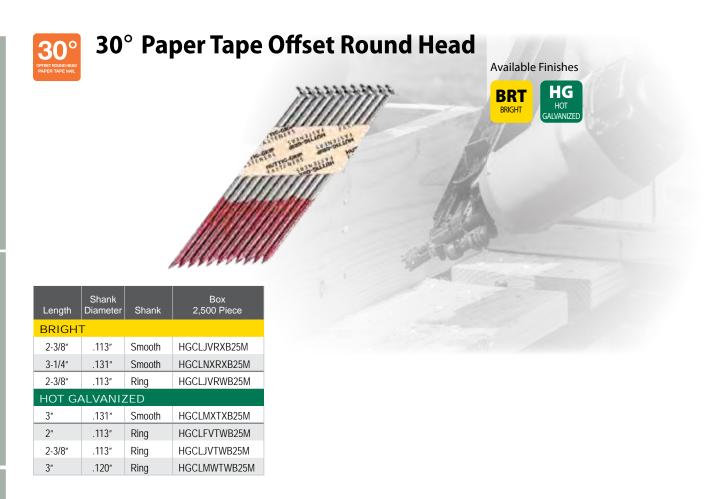



15° Wire Coil













Length	Shank Diameter	Shank	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 4,500 Piece	Box 5,000 Piece
BRIGH [*]	Т						
2-3/8"	.113″	Smooth	_	HGCCJVRXB3M	_	_	HGCCJVRXB5M
2-1/2"	.131"	Smooth	_	HGCCKXRXB3M	_	HGCCKXRXB45M	_
3"	.120"	Smooth	HGCCMWRXB25M	_	HGCCMWRXB4M	HGCCMWRXB45M	_
3″	.131"	Smooth	HGCCMXRXB25M	_	HGCCMXRXB4M	_	_
3-1/4"	.120"	Smooth	HGCCNWRXB25M	_	HGCCNWRXB4M	_	_
3-1/4"	.131"	Smooth	HGCCNXRXB25M	_	_	HGCCNXRXB45M	_
2-3/8"	.113″	Ring	_	HGCCJVRWB3M	_	HGCCJVRWB45M	HGCCJVRWB5M
2-1/2"	.131"	Ring	_	_	_	HGCCKXRWB45M	_
ELECTI	RO GAL	VANIZE	D				
3"	.120"	Ring	_	_	_	HGCCMWSWB45M	_
3"	.131"	Ring	_	_	_	HGCCMXSWB45M	_
3-1/4"	.131"	Ring	_	_	_	HGCCNXSWB45M	_
HOT G	ALVANIZ	ZED					
3″	.131"	Smooth	HGCCMXTXB25M	_	_	_	_
3-1/4"	.131"	Smooth	HGCCNXTXB25M	_	_	_	_
2-3/8"	.113″	Ring	_	HGCCJVTWB3M	_	_	_
OUTDO	OR GAL	VANIZE	ED				
2"	.113″	Smooth	_	HGCCFVWXB3M	_	_	_
2-3/8"	.131"	Smooth	_	HGCCJVWXB3M	_	_	_
3″	.131"	Smooth	HGCCMXWXB25M	_	_	_	_
3-1/4"	.131"	Smooth	HGCCNXWXB25M	_	_	_	_
2"	.113″	Ring	_	HGCCFVWWB3M	_	_	_
2-3/8"	.113″	Ring	_	HGCCJVWWB3M	_	_	_





15° Wire Coil - Pallets/Crates

Available Finishes





Length	Shank Diameter	Shank	Point	Box 3,000 Piece	Box 9,000 Piece	
BRIGH [*]	Г					
2"	.099"	Smooth	Sharp	HGCCFURXB3M	_	
2-1/4"	.099"	Smooth	Sharp	_	HGCCHUQXB9M	
2"	.099"	Ring	Sharp	HGCCFURWB3M	_	
1-3/4"	.099"	Screw	Blunt Diamond Point	_	HGCCDURZD9M	
2"	.099"	Screw	Blunt Diamond Point	_	HGCCFURZD9M	
2-1/4"	.099"	Screw	Blunt Diamond Point	Blunt Diamond Point —		

80 www.huttig.com





30° Paper Tape Joist Hanger Nail









Length	Shank Diameter	Shank	Box 2,000 Piece	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece
BRIGH	Т					
1-1/2"	.131"	Smooth	_	_	_	HGCJCXRXB4M
2-1/2"	.131"	Smooth	_	HGCJKXRXB25M	_	_
1-1/2"	.148″	Smooth	_	_	HGCJCYRXB3M	_
2-1/2"	.148″	Smooth	_	HGCJKYRXB25M	_	_
2-1/2"	.162"	Smooth	HGCJKZRXB2M	_	_	_
ELECT	RO GAL	VANIZED)			
1-1/2"	.131"	Smooth	_	_	_	HGCJCXSXB4M
1-1/2"	.148″	Smooth	_	_	HGCJCYSXB3M	_
HOT G	ALVANIZ	ZED				
1-1/2"	.131"	Smooth	_	_	_	HGCJCXTXB4M
1-1/2"	.148″	Smooth	_	_	HGCJCYTXB3M	_
2-1/2"	.162"	Smooth	HGCJKZTXB2M	_	_	_







15° Wire Weld - Siding/Fence



Length	Shank Diameter	Shank	Tub 1,200 Piece	Box 3,000 Piece	Box 3,600 Piece				
HOT GALVANIZED									
2"	.092"	Smooth	HGCCFTTWB12M	HGCCFTTXB3M	HGCCFTTXB36M				
2-3/16"	.092"	Smooth	HGCCITTXB12M	HGCCITTXB3M	HGCCITTXB36M				
2-1/2"	.092"	Smooth	_	HGCCKTTXB3M	HGCCKTTXB36M				
1-3/4"	.092"	Ring	HGCCDTTWB12M	HGCCDTTWB3M	HGCCDTTWB36M				
2"	.092"	Ring	HGCCFTTWB12M	HGCCFTTWB3M	HGCCFTTWB36M				
2-3/16"	.092"	Ring	HGCCITTWB12M	HGCCITTWB3M	HGCCITTWB36M				
2-1/4"	.092"	Ring	_	_	HGCCHTTWB36M				
2-1/2"	.092"	Ring	_	HGCCKTTWB3M	HGCCKTTWB36M				



Stainless Steel Coil 15° Wire Weld also available - see Huttig-Guard collated fasteners section for details.



How to read the Huttig collated staple item numbers


























Gauge	Code	Crown	Code	Style	Code	Crown Width	Code	Leg Length	Code	Coating	Code	Piece	Code
18	Α	Narrow	W	"L"-Style	А	7/32"	D	1/4"	Q	EG – Electro Galvanized	R	1,000	1M
16	В	Medium	Χ	"N"-Style	С	1/4"	Е	5/16"	Р	HG – Hot Galvanized	S	2,000	2M
15-1/2	С	Wide	Υ	"GS"-Style	Е	3/8"	F	3/8"	0	304 Stainless Steel	T	2,500	25M
20	D	Tacker	Z	"BCS"-Style	F	7/16"	G	1/2"	N	316 Stainless Steel	U	3,000	3M
23	E			"GSW"-Style	G	1/2"	Н	9/16"	М	OG – Outdoor Galvanized	V	4,000	4M
14	F			"P"-Style	Н	15/16"	1	5/8"	L			5,000	5M
				"A11"-Style Tacker	L	1"	J	3/4"	K				
				"50"-Style Tacker	N			7/8"	J				
				"A19"-Style Tacker	0			1″	I				
				"STCR"-Style	Р			1-1/4"	F				
				"SHCR"-Style	Q			1-3/8"	Ε				
								1-1/2"	D				
								1-3/4"	С				
								2"	В				
								2-1/4"	Α				



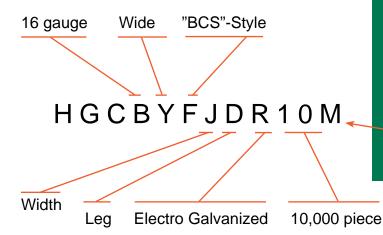





"BCS"-Style

Available Finish





Crown	Leg	Gauge	Box 10,000 Piece						
ELECTRO GALVANIZED									
1″	3/4"	16	HGCBYFJKR10M						
1″	7/8"	16	HGCBYFJJR10M						
1″	1"	16	HGCBYFJIR10M						
1″	1-1/4"	16	HGCBYFJFR10M						
1″	1-1/2"	16	HGCBYFJDR10M						
1″	1-3/4"	16	HGCBYFJCR10M						
1″	2"	16	HGCBYFJBR10M						



"GSW"-Style





Crown	Leg	Gauge	Box 10,000 Piece
ELEC.	TRO G	ALVAN	IZED
15/16"	7/8"	16	HGCBYGIJR10M
15/16"	1″	16	HGCBYGIIR10M
15/16"	1-1/4"	16	HGCBYGIFR10M
15/16"	1-1/2"	16	HGCBYGIDR10M
15/16"	1-3/4"	16	HGCBYGICR10M
15/16"	2"	16	HGCBYGIBR10M

16_{GA} WIDE CROWN STAPLE

"P"-Style





Crown	Leg	Gauge	Box 10,000 Piece
ELEC.	TRO G	ALVAN	IZED
1″	5/8"	16	HGCBYHJLR10M
1″	3/4"	16	HGCBYHJKR10M
1″	7/8"	16	HGCBYHJJR10M
1″	1"	16	HGCBYHJIR10M
1″	1-1/4"	16	HGCBYHJFR10M
1″	1-1/2"	16	HGCBYHJDR10M
1″	1-3/4"	16	HGCBYHJCR10M
1″	2"	16	HGCBYHJBR10M



"BCS"-Style



Available Finish



Crown	Leg	Gauge	Box 10,000 Piece
ELEC.	TRO GA	ALVANI	ZED
1/2"	1-1/4"	16	HGCBXFHFR10M
1/2"	1-1/2"	16	HGCBXFHDR10M
1/2"	1-3/4"	16	HGCBXFHCR10M
1/2"	2"	16	HGCBXFHBR10M



"GS"-Style



Available Finish



Crown	Leg	Gauge	Box 10,000 Piece
ELEC.	TRO G	ALVAN	IZED
1/2"	1-1/4"	16	HGCBXEHFR10M
1/2"	1-1/2"	16	HGCBXEHDR10M
1/2"	1-3/4"	16	HGCBXEHCR10M
1/2"	2"	16	HGCBXEHBR10M



"N"-Style



Available Finish

EG ELECTRO GALVANIZED

С	rown	Leg	Gauge	Box 10,000 Piece
Ε	LEC	TRO G	ALVAN	IZED
7	/16"	1″	16	HGCBXCGIR10M
7	/16"	1-1/4"	16	HGCBXCGFR10M
7	/16"	1-1/2"	16	HGCBXCGDR10M
7	/16"	1-3/4"	16	HGCBXCGCR10M
7	/16"	2"	16	HGCBXCGBR10M







"L"-Style



Available Finish



Crown	Leg	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED					
1/4"	5/8"	HGCAWAELR5M	6	HGCAWAELR1M	10
1/4"	3/4"	HGCAWAEKR5M	6	HGCAWAEKR1M	10
1/4"	7/8"	HGCAWAEJR5M	6	HGCAWAEJR1M	10
1/4"	1"	HGCAWAEIR5M	6	HGCAWAEIR1M	10
1/4"	1-1/8"	HGCAWAEHR5M	6	_	10
1/4"	1-1/4"	HGCAWAEFR5M	6	HGCAWAEFR1M	10
1/4"	1-1/2"	HGCAWAEDR5M	6	HGCAWAEDR1M	10




Stainless Steel "L"-style Narrow Crown Staples also available - see Huttig-Guard section for details.





"50"-Style



Available Finish



Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper	
ELECTRO GALVANIZED					
1/2"	5/16"	20	HGCDZNHPR5M	20	
1/2"	3/8"	20	HGCDZNHOR5M	20	



"SHCR"-Style

Available Finish




EC
EG
ELECTRO
GALVANIZED
GALVAIVIZED

Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
ELEC	TRO GA	ALVAN	IZED	
3/8"	1/4"	20	HGCDZQFQR5M	20
3/8"	3/8"	20	HGCDZQFOR5M	20



"A11"-Style



Available Finish





Crown

7/16"

Leg

3/8"

ELECTRO GALVANIZED

Gauge

"STCR"-Style



Box 5,000 Piece

HGCDZPGOR5M

Available Finish

Boxes / shipper



Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
ELEC.	TRO G	ALVAN	IZED	
3/8"	1/4″	20	HGCDZLFQR5M	20
3/8"	5/16"	20	HGCDZLFPR5M	20
3/8"	3/8"	20	HGCDZLFOR5M	20
3/8"	1/2"	20	HGCDZLFNR5M	20

Stainless Steel "A11"-style Tacker Staples also available - see Huttig-Guard section for details.



"A19"-Style





Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper		
ELECTRO GALVANIZED						
3/8"	1/4"	23	HGCEZOFQR5M	20		



How to read the Huttig finish nail & brad nail item numbers











Gauge	Code	Style	Code	Length	Code	Coating/Finish	Code	Pieces	Code
				_		, and the second se			
15	Α	"DA"-Style	DA	1/2"	12	Bright	В	1,000	1M
16	В	"FN"-Style	FN	9/16"	916	EG – Electro Galvanized	G	2,000	2M
18	С	"SF"-Style	SF	5/8"	58	304 Stainless Steel	S4	2,500	25M
20	D	"AF"-Style	AF	3/4"	34	316 Stainless Steel	S6	3,000	3M
23	Ε	Brad	BD	7/8″	78			4,000	4M
		Pin	PN	1"	1			5,000	5M
				1-1/8"	118				
				1-3/16"	1316				
				1-1/4"	114				
				1-3/8"	138				
				1-1/2"	112				
				1-3/4"	134				
				2"	2				
				2-1/4"	214				
				2-1/2"	212				







15 gauge "DA"-Style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELEC	TRO GALVANIZE	ED		
1-1/4"	HGCADA114G	4	HGCADA114G1M	10
1-1/2"	HGCADA112G	4	HGCADA112G1M	10
1-3/4"	HGCADA134G	4	HGCADA134G1M	10
2"	HGCADA2G	4	HGCADA2G1M	10
2-1/4"	HGCADA214G	2	_	_
2-1/2"	HGCADA212G	2	HGCADA212G1M	10



Stainless Steel 15 gauge "DA"-style Angled Finish Nail also available - see Huttig-Guard section for details.



15 gauge "FN"-Style Angled Finish Nail

Size	Box 3,650 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELEC	TRO GALVANIZE	ED		
1-1/4"	HGCAFN114G	4	HGCAFN114G1M	10
1-1/2"	HGCAFN112G	4	HGCAFN112G1M	10
1-3/4"	HGCAFN134G	4	HGCAFN134G1M	10
2"	HGCAFN2G	4	HGCAFN2G1M	10
2-1/2"	HGCAFN212G	2	HGCAFN212G1M	10





16 gauge "SF"-Style Straight Finish Nail

Size	Box 2,500 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELEC'	TRO GALVANIZ	ZED		
3/4"	HGCBSF34G	10	HGCBSF34G1M	10
7/8"	HGCBSF78G	10	HGCBSF78G1M	10
1"	HGCBSF1G	10	HGCBSF1G1M	10
1-1/8"	HGCBSF118G	10	HGCBSF118G1M	10
1-1/4"	HGCBSF114G	10	HGCBSF114G1M	10
1-1/2"	HGCBSF112G	10	HGCBSF112G1M	10
1-3/4"	HGCBSF134G	10	HGCBSF134G1M	10
2"	HGCBSF2G	10	HGCBSF2G1M	10
2-1/4"	HGCBSF214G	8	HGCBSF214G1M	10
2-1/2"	HGCBSF212G	8	HGCBSF212G1M	10



Stainless Steel 16 gauge "SF"-style Straight Finish Nail also available - see Huttig-Guard section for details.

18_{GA}

18 gauge Brad Nail

Size	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELEC.	TRO GALVANIZE	ED		
5/8"	HGCCBD58G	10	HGCCBD58G1M	10
3/4"	HGCCBD34G	10	HGCCBD34G1M	10
1"	HGCCBD1G	10	HGCCBD1G1M	10
1-1/8"	HGCCBD118G	10	HGCCBD118G1M	10
1-1/4"	HGCCBD114G	10	HGCCBD114G1M	10
1-1/2"	HGCCBD112G	10	HGCCBD112G1M	10
1-3/4"	HGCCBD134G	10	HGCCBD134G1M	10
2"	HGCCBD2G	10	HGCCBD2G1M	10

Stainless Steel 18 gauge Brad Nail also available - see Huttig-Guard section for details.








23 gauge Pin Nail

Size	Clamshell 2,000 Piece	Clamshells / master		
ELECTRO GALVANIZED				
1/2"	HGCEPN12G2M	10		
5/8"	HGCEPN58G2M	10		
3/4"	HGCEPN34G2M	10		
1"	HGCEPN1G2M	10		
1-3/16"	HGCEPN1316G2M	10		





Stainless Steel Coil Roofing Nails





Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.



Stainless Steel 21° Plastic Strip Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece
STAINL	ESS ST	EEL GRA	ADE 304	
2"	.113″	Ring	HGCDFVUWB1M	_
2-3/8"	.120″	Ring	HGCDJWUWB1M	HGCDJWUWB2M
3"	.131"	Ring	HGCDMXUWB1M	HGCDMXUWB2M
3-1/4"	.131"	Ring	HGCDNXUWB1M	HGCDNXUWB2M





Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.



Stainless Steel 15° Wire Weld - Siding/Fence

Length	Shank Diameter	Shank	Tub 1,200 Piece	Box 3,000 Piece	Box 3,600 Piece
STAINL	STAINLESS STEEL GRADE 304				
2-3/16"	.113"	Smooth	HGCCITUXB12M	_	_
1-3/4"	.092"	Ring	HGCCDTUWB12M	HGCCDTUWB3M	HGCCDTUWB36M
2"	.092"	Ring	HGCCFTUWB12M	HGCCFTUWB3M	HGCCFTUWB36M
2-3/16"	.092"	Ring	HGCCITUWB12M	HGCCITUWB3M	HGCCITUWB36M
2-1/2"	.092"	Ring	_	HGCCKTUWB3M	HGCCKTUWB36M



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

HUTTIG-GUARD



Stainless Steel "N"-style Medium Crown Staple





Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.



Stainless Steel "L"-style Narrow Crown Staple



Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
STAI	NLESS	STEEL	GRADE 304			
1/4"	1″	18	HGCAWAEIT5M	6	_	_
1/4"	1-1/4"	18	HGCAWAEFT5M	6	HGCAWAEFT1M	5
1/4"	1-1/2"	18	HGCAWAEDT5M	6	HGCAWAEDT1M	5



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.



Leg

STAINLESS

Stainless Steel "A11"-style Tacker Staple









Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

HUTTIG-GUARD



Stainless Steel 15 gauge "DA"-style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
STAIN	NLESS STEEL G	RADE 304		
1-1/2"	HGCADA112S4	2	HGCADA112S41M	5
2"	HGCADA2S4	2	HGCADA2S41M	5
2-1/2"	HGCADA212S4	2	HGCADA212S41M	5



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.



Stainless Steel 16 gauge "SF"-style Straight Finish Nail

Size	Box 2,500 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
STAINLESS STEEL GRADE 304				
1-1/2"	HGCBSF112S4	6	HGCBSF112S41M	5
2"	HGCBSF2S4	6	HGCBSF2S41M	5
2-1/2"	HGCBSF212S4	6	HGCBSF212S41M	5



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.



Stainless Steel 18 gauge Brad Nail

Size	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
STAIN	NLESS STEEL GF	RADE 304		
1-1/4"	HGCCBD114S4	6	HGCCBD114S41M	5
1-1/2"	HGCCBD112S4	6	HGCCBD112S41M	5
2"	HGCCBD2S4	6	HGCCBD2S41M	5



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

HUTTIG-GRIP & **HUTTIG-GUARD**



TUB PROGRAM



FINISH & FINE WIRE BOX PROGRAM



FINISH & FINE WIRE CLAMSHELL PROGRAM

HUTTIG-GRIP & **HUTTIG-GUARD**

Tub /





SKU	Length	Diameter	Shank	Quantity
BRIGHT				
HGCDFVRXB1M	2"	2" .113" Smooth		1,000
HGCDHYRXB1M	2-1/4"	.148"	Smooth	1,000
HGCDJVRXB1M	2-3/8"	.113"	Smooth	1,000
HGCDJYRXB1M	2-3/8"	.148"	Smooth	1,000
HGCDKXRXB1M	2-1/2"	.131"	Smooth	1,000
HGCDMXRXB1M	3"	.131"	Smooth	1,000
HGCDNXRXB1M	3-1/4"	.131"	Smooth	1,000
HGCDJVRWB1M	2-3/8"	' .113" Ring		1,000
HOT GALVANIZ	ED			
HGCDFVTXB1M	2"	.113″	Smooth	1,000
HGCDKXTXB1M	2-1/2"	.131"	Smooth	1,000
HGCDMXTXB1M	3"	.131"	Smooth	1,000
HGCDNXTXB1M	3-1/4"	.131"	Smooth	1,000
HGCDFVTWB1M	2"	.113"	Ring	1,000
HGCDJVTWB1M	2-3/8"	.113"	Ring	1,000
HGCDMWTWB1M	3"	.120"	Ring	1,000
STAINLESS ST	EEL G	RADE 30	14	
HGCDFVUWB1M	2"	.113"	Ring	1,000
HGCDJWUWB1M	2-3/8"	.120"	Ring	1,000
HGCDMXUWB1M	3"	.131"	Ring	1,000
HGCDNXUWB1M	3-1/4"	.131"	Ring	1,000



HGCDMXUMBIM	3"	.131"	Ring	1,000
HGCDNXUWB1M	3-1/4"	.131"	Ring	1,000
BRIGHT				
HGCGFVRXB1M	2"	.113″	Smooth	1,000
HGCGJVRXB1M	2-3/8"	.113"	Smooth	1,000
HGCGMWRXB1M	3"	.120"	Smooth	1,000
HGCGMXRXB1M	3"	.131"	Smooth	1,000
HGCGNWRXB1M	3-1/4"	.120"	Smooth	1,000
HGCGNXRXB1M	3-1/4"	.131"	Smooth	1,000
HGCGJVRWB1M	2-3/8"	.113″	Ring	1,000
OUTDOOR GAL\	/ANIZE	ED		
HGCGFVWXB1M	2"	.113"	Smooth	1,000
HGCGJVWXB1M	2-3/8"	.113″	Smooth	1,000
HGCGMWWXB1M	3"	.120"	Smooth	1,000
HGCGNXWXB1M	3-1/4"	.131"	Smooth	1,000
HGCGFVWWB1M	2"	.113"	Ring	1,000
HGCGJVWWB1M	2-3/8"	.113″	Ring	1,000
HGCGMWWWB1M	3"	.120"	Ring	1,000




SKU	Length	Diameter	Shank	Quantity
BRIGHT				
HGCIFVRXB1M	2"	.113″	Smooth	1,000
HGCIJVRXB1M	2-3/8"	.113"	Smooth	1,000
HGCIMWRXB1M	3"	.120"	Smooth	1,000
HGCIMXRXB1M	3"	.131"	Smooth	1,000
HGCINWRXB1M	3-1/4"	.120"	Smooth	1,000
HGCINXRXB1M	3-1/4"	.131"	Smooth	1,000
HGCIJVRWB1M	2-3/8"	.113″	Ring	1,000
HOT GALVANIZI	ED			
HGCIFVTXB1M	2"	.113"	Smooth	1,000
HGCIJVTXB1M	2-3/8"	.113"	Smooth	1,000
HGCIMWTXB1M	3"	.120"	Smooth	1,000
HGCIMXTXB1M	3"	.131"	Smooth	1,000
HGCINXTXB1M	3-1/4"	.131"	Smooth	1,000
HGCIFVTWB1M	2"	.113"	Ring	1,000
HGCIJVTWB1M	2-3/8"	.113"	Ring	1,000
HGCIMWTWB1M	3"	.120"	Ring	1,000



HOT GALVANIZED					
HGCCITTXB12M	2-3/16"	.092"	Smooth	1,200	
HGCCDTTWB12M	1-3/4"	.092"	Ring	1,200	
HGCCFTTWB12M	2"	.092"	Ring	1,200	
HGCCITTWB12M	2-3/16"	.092"	Ring	1,200	
STAINLESS ST	EEL GI	RADE 30	4		
HGCCITUXB12M	2-3/16"	.092"	Smooth	1,200	
HGCCDTUWB12M	1-3/4"	.092"	Ring	1,200	
HGCCFTUWB12M	2"	.092"	Ring	1,200	
HGCCITUWB12M	2-3/16"	.092"	Ring	1,200	



ELECTRO GALVA	NIZEC)		
HGC34EGCRFGT	3/4"	.120"	Smooth	840
HGC78EGCRFGT	7/8"	.120"	Smooth	840
HGC1EGCRFGT	1"	.120"	Smooth	840
HGC114EGCRFGT	1-1/4"	.120"	Smooth	840
HGC112EGCRFGT	1-1/2"	.120"	Smooth	840
HGC134EGCRFGT	1-3/4"	.120"	Smooth	840

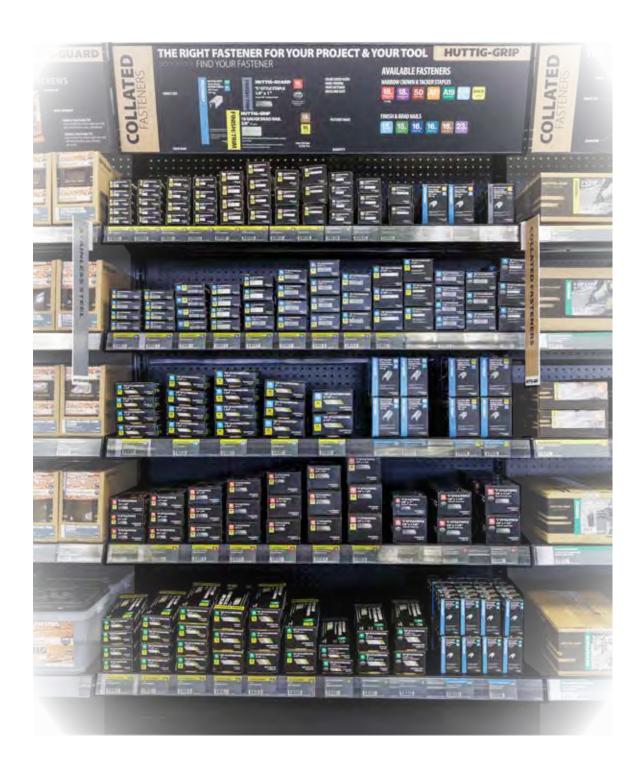

HUTTIG-GRIP & **HUTTIG-GUARD**



1 5 _{GA}	ELECTRO GALV	/ANIZE	.D	
NGLED NAIL	HGCADA114G	1-1/4"	4,000	4
DA-STYLE	HGCADA112G	1-1/2"	4,000	4
	HGCADA134G	1-3/4"	4,000	4
	HGCADA2G	2"	4,000	4
	HGCADA214G	2-1/4"	4,000	2
	HGCADA212G	2-1/2"	4,000	2
	STAINLESS ST	EEL G	RADE 3	804
	HGCADA112S4	1-1/2"	4,000	2
	HGCADA2S4	2"	4,000	2
	HGCADA212S4	2-1/2"	4,000	2

15 _{GA}
"FN"-SYLE
3100

ELECTRO GALVANIZED					
	HGCAFN114G	1-1/4"	3,650	4	
	HGCAFN112G	1-1/2"	3,650	4	
	HGCAFN134G	1-3/4"	3,650	4	
	HGCAFN2G	2"	3,650	4	
	HGCAFN212G	2-1/2"	3,650	2	

16_{GA} STRAIGHT NAIL

ELECTRO GALVANIZED						
HGCBSF34G	3/4"	2,500	10			
HGCBSF78G	7/8"	2,500	10			
HGCBSF1G	1"	2,500	10			
HGCBSF118G	1-1/8"	2,500	10			
HGCBSF114G	1-1/4"	2,500	10			
HGCBSF112G	1-1/2"	2,500	10			
HGCBSF134G	1-3/4"	2,500	10			
HGCBSF2G	2"	2,500	10			
HGCBSF214G	2-1/4"	2,500	8			
HGCBSF212G	2-1/2"	2,500	8			
STAINLESS ST	EEL GF	RADE 30	4			
HGCBSF112S4	1-1/2"	2,500	6			
HGCBSF2S4	2"	2,500	6			
HGCBSF212S4	2-1/2"	2,500	6			

23_{GA}

ELECTRO GALVANIZED						
HGCEPN12G2M	1/2"	2,000	10			
HGCEPN58G2M	5/8"	2,000	10			
HGCEPN34G2M	3/4"	2,000	10			
HGCEPN1G2M	1"	2,000	10			
HGCEPN1316G2M	1-3/16"	2,000	10			

	SKU	Length	Pieces / box	Boxes / shipper
18,	ELECTRO GALV	/ANIZE	D	
BRAD NAIL	HGCCBD58G	5/8"	5,000	10
	HGCCBD34G	3/4"	5,000	10
	HGCCBD1G	1"	5,000	10
	HGCCBD118G	1-1/8"	5,000	10
	HGCCBD114G	1-1/4"	5,000	10
	HGCCBD112G	1-1/2"	5,000	10
	HGCCBD134G	1-3/4"	5,000	10
	HGCCBD2G	2"	5,000	10
	STAINLESS ST	EEL G	RADE 3	304
	HGCCBD114S4	1-1/4"	5,000	6
	HGCCBD112S4	1-1/2"	5,000	6
	HGCCBD2S4	2"	5.000	6

	SKU	Crown	Leg	Pieces / box	Boxes / shipper
18,	ELECTRO GALV	/ANIZE	.D		
NARROW CROWN STAPLE	HGCAWAELR5M	1/4"	5/8"	5,000	6
"L"-STYLE	HGCAWAEKR5M	1/4"	3/4"	5,000	6
	HGCAWAEJR5M	1/4"	7/8"	5,000	6
	HGCAWAEIR5M	1/4"	1"	5,000	6
	HGCAWAEHR5M	1/4"	1-1/8"	5,000	6
	HGCAWAEFR5M	1/4"	1-1/4"	5,000	6
	HGCAWAEDR5M	1/4"	1-1/2"	5,000	6
	STAINLESS ST	EEL GF	RADE 3	04	
	HGCAWAEIT5M	1/4"	1"	5,000	6
	HGCAWAEFT5M	1/4"	1-1/4"	5,000	6
	HGCAWAEDT5M	1/4"	1-1/2"	5,000	6
Δ11	ELECTRO GALV	/ANI7F	.D		
TACKER STAPLE	HGCDZLFOR5M	3/8"	3/8"	5,000	20
	STAINLESS ST			-,	20
					0.0
	HGCDZLFOT5M	3/8"	3/8"	5,000	20
A19	ELECTRO GALV	/ANIZE	.D		
TACKER STAPLE	HGCEZOFQR5M	3/8"	1/4″	5,000	20
SHCR	ELECTRO GALV	/ANIZE	.D		
TACKER STAPLE	HGCDZQFOR5M	3/8"	3/8"	5,000	20
STCR	ELECTRO GALV	/ANIZE	D		

7/16" 3/8"

5,000

HGCDZPGOR5M



HUTTIG-GRIP & **HUTTIG-GUARD**

Pieces / Clamshells /

	SKU	Length	clamshell	master
15 _{GA}	ELECTRO GALV	/ANIZE	D	
angled nail	HGCADA114G1M	1-1/4"	1,000	10
DA -SITLE	HGCADA112G1M	1-1/2"	1,000	10
	HGCADA134G1M	1-3/4"	1,000	10
	HGCADA2G1M	2"	1,000	10
	HGCADA212G1M	2-1/2"	1,000	10
	STAINLESS ST	EEL G	RADE 3	304
	HGCADA112S41M	1-1/2"	1,000	5
	HGCADA2S41M	2"	1,000	5
	HGCADA212S41M	2-1/2"	1,000	5
15 _{GA}	ELECTRO GALV	/ANIZE	ED .	
ANGLED NAIL "FN"-STYLE	HGCAFN114G1M	1-1/4"	1,000	10
- N 31tt	HGCAFN112G1M	1-1/2"	1,000	10
	HGCAFN134G1M	1-3/4"	1,000	10
	HGCAFN2G1M	2"	1,000	10
	HGCAFN212G1M	2-1/2"	1,000	10
16 _{GA}	ELECTRO GAL	VANIZ	ED	
STRAIGHT NAIL	HGCBSF34G1M	3/4"	1,000	10
	HGCBSF78G1M	7/8"	1,000	10
	HGCBSF1G1M	1"	1,000	10
	HGCBSF118G1M	1-1/8"	1,000	10
	HGCBSF114G1M	1-1/4"	1,000	10
	HGCBSF112G1M	1-1/2"	1,000	10
	HGCBSF134G1M	1-3/4"	1,000	10
	HGCBSF2G1M	2"	1,000	10
	HGCBSF214G1M	2-1/4"	1,000	10
	HGCBSF212G1M	2-1/2"	1,000	10
	STAINLESS S	TEEL G	RADE 3	04
	HGCBSF112S41M	1-1/2"	1,000	5
	HGCBSF2S41M	2"	1,000	5
	HGCBSF212S41M	2-1/2"	1,000	5

	SKU	Length	Pieces / clamshell	Clamshells master
18 _{GA}	ELECTRO GAL	VANIZE	D	
BRAD NAIL	HGCCBD58G1M	5/8"	1,000	10
	HGCCBD34G1M	3/4"	1,000	10
	HGCCBD1G1M	1"	1,000	10
	HGCCBD118G1M	1-1/8"	1,000	10
	HGCCBD114G1M	1-1/4"	1,000	10
	HGCCBD112G1M	1-1/2"	1,000	10
	HGCCBD134G1M	1-3/4"	1,000	10
	HGCCBD2G1M	2"	1,000	10
	STAINLESS ST	EEL G	RADE 3	04
	HGCCBD114S41M	1-1/4"	1,000	5
	HGCCBD112S41M	1-1/2"	1,000	5
	HGCCBD2S41M	2"	1,000	5
23 _{GA}	ELECTRO GALV	/ANIZE	.D	
PIN NAIL	HGCEPN12G2M	1/2"	2,000	10
	HGCEPN58G2M	5/8"	2,000	10
	HGCEPN34G2M	3/4"	2,000	10

HGCEPN1G2M

HGCEPN1316G2M

	SKU	Crown	Leg	clamshell	master
18	ELECTRO GAL	<u> </u>	:D		
NARROW CROWN				1 000	10
"L"-STYLE	HGCAWAELR1M	1/4″	5/8"	1,000	10
	HGCAWAEKR1M	1/4"	3/4"	1,000	10
	HGCAWAEJR1M	1/4"	7/8"	1,000	10
	HGCAWAEIR1M	1/4"	1"	1,000	10
	HGCAWAEHR1M	1/4"	1-1/8"	1,000	10
	HGCAWAEFR1M	1/4"	1-1/4"	1,000	10
	HGCAWAEDR1M	1/4″	1-1/2"	1,000	10
	STAINLESS ST	EEL GF	RADE 30)4	
	HGCAWAEIT1M	1/4"	1"	1,000	10
	HGCAWAEFT1M	1/4"	1-1/4"	1,000	10
	HGCAWAEDT1M	1/4"	1-1/2"	1,000	10

2,000

2,000

1-3/16"

10

10

Huttig-Grip Collated Fasteners fit these tools.

COLLATED FASTENER/TOOL COMPATIBILITY CHART

Fastener Type	Tool Brand			Too	l Model		
	Bostitch	RN45	RN45B	RN46	RN46-1		
RE	Duo-Fast	DRN-45	RN-175				
ROOFING NAIL	Hitachi	NV45AB2	NV45AE				
Coil Roofing	Makita	AN451	AN453				
con nooning	Max	CN445R	CN445R2	CN450R			
	Paslode	R-175C	3175/44RCU				
	Porter-Cable	134R	RN175	RN175A			
	Ridgid	R175RNE					
	Senco	SCN40R	SCN200R	RoofPro 450	RoofPro 455XP		
	·				-		
	Bostitch	F21PL	F21PL2	LPF21PL	N79RH	RN90	
21°	DeWalt	D51844	D51845				
ROUND HEAD NAIL PLASTIC	Duo-Fast	CN-137	CN-350	CN-350B	FDF350CN	SNP-83	
21° Plastic	Hitachi	NR83	NR83A2	NR90AE	NR90AEPR		
Round Head	Makita	AN922	AN923	AN8300			
	Max	GS683RH-EX	SN80	SN883RH2	SN890RH		
	Paslode	5325/SRH	5350/SRH-20				
	Porter-Cable	FR350					
	Ridgid	R350RHE					
	Senco	SN60	SN65	SN902XP	GT90FRH	FRAMEPRO502	FAMEPRO650
	Bostitch	F28WW	GF28WW	LPF28WW6	N80SB		
28 °	Duo-Fast	CN-325B					
WIRE WELD NAIL OFFSET ROUND HEAD	Hitachi	NDOOAE					
	IIIIaciii	NR90AF					
28° Wire Weld	Max	SN883CH/28	SN890CH/28				
28° Wire Weld Offset Round Head			SN890CH/28 FM350A				
	Мах	SN883CH/28					
	Мах	SN883CH/28		N79PT	N90PT		
	Max Porter-Cable	SN883CH/28 FM350	FM350A	N79PT D51823	N90PT		
	Max Porter-Cable Bostitch	SN883CH/28 FM350 F33PT	FM350A LP33PT		N90PT NR90AA	NR90AD	NR90GC
Offset Round Head	Max Porter-Cable Bostitch DeWalt	SN883CH/28 FM350 F33PT DCN692	FM350A LP33PT D51822	D51823		NR90AD	NR90GC
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi	SN883CH/28 FM350 F33PT DCN692 NR83AA	FM350A LP33PT D51822 NR83AA2	D51823		NR90AD SN890CH2/34	NR90GC
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942	FM350A LP33PT D51822 NR83AA2	D51823 NR83AA3			
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34	FM350A LP33PT D51822 NR83AA2 AN943	D51823 NR83AA3 SN890CH/34	NR90AA	SN890CH2/34	
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300	FM350A LP33PT D51822 NR83AA2 AN943	D51823 NR83AA3 SN890CH/34	NR90AA	SN890CH2/34	NR90GC F350S PM PLU
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A	D51823 NR83AA3 SN890CH/34	NR90AA PF250S	SN890CH2/34	
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid	F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A	D51823 NR83AA3 SN890CH/34 IMPULSE 35	NR90AA PF250S	SN890CH2/34 PF350S	
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid	F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A	D51823 NR83AA3 SN890CH/34 IMPULSE 35	NR90AA PF250S	SN890CH2/34 PF350S	
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid Senco	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE FRAMEPRO 60	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A	D51823 NR83AA3 SN890CH/34 IMPULSE 35	NR90AA PF250S 01XP/751XP	SN890CH2/34 PF350S	
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid Senco	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE FRAMEPRO 60	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A 1/651	D51823 NR83AA3 SN890CH/34 IMPULSE 35 FRAMEPRO 70	NR90AA PF250S 01XP/751XP N65CP-2	SN890CH2/34 PF350S	
Offset Round Head	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid Senco Bostitch Hitachi	F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE FRAMEPRO 60 NV65AB	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A 1/651 N55C NV65AE	D51823 NR83AA3 SN890CH/34 IMPULSE 35 FRAMEPRO 70 N65CP NV65AH	NR90AA PF250S 01XP/751XP N65CP-2	SN890CH2/34 PF350S	
30° RAPER TAPE NAIL 15° COLL SIGNIC MALL WHE WELD	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid Senco Bostitch Hitachi Max	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE FRAMEPRO 60 N50C NV65AB CN565D	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A 1/651 N55C NV65AE CN565S	D51823 NR83AA3 SN890CH/34 IMPULSE 35 FRAMEPRO 70 N65CP NV65AH CN890S	NR90AA PF250S 01XP/751XP N65CP-2	SN890CH2/34 PF350S	
30° RAPER TAPE NAIL 15° COLL SIGNIC MALL WHE WELD	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid Senco Bostitch Hitachi Max	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE FRAMEPRO 60 N50C NV65AB CN565D	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A 1/651 N55C NV65AE CN565S	D51823 NR83AA3 SN890CH/34 IMPULSE 35 FRAMEPRO 70 N65CP NV65AH CN890S	NR90AA PF250S 01XP/751XP N65CP-2	SN890CH2/34 PF350S	
30° RAPER TAPE NAIL 15° COLL SIGNIC MALL WHE WELD	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid Senco Bostitch Hitachi Max Senco	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE FRAMEPRO 60 N50C NV65AB CN565D SCN49	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A 1/651 N55C NV65AE CN565S SCN55S	D51823 NR83AA3 SN890CH/34 IMPULSE 35 FRAMEPRO 70 N65CP NV65AH CN890S	NR90AA PF250S 01XP/751XP N65CP-2	SN890CH2/34 PF350S	
30° RAPER TAPE NAIL 15° COLL SIGNIC MALL WHE WELD	Max Porter-Cable Bostitch DeWalt Hitachi Makita Max Paslode Porter-Cable Ridgid Senco Bostitch Hitachi Max Senco	SN883CH/28 FM350 F33PT DCN692 NR83AA AN942 SN883CH/34 5300 FC350 R350CHE FRAMEPRO 60 N50C NV65AB CN565D SCN49 MCN150	FM350A LP33PT D51822 NR83AA2 AN943 900420 FC350A 1/651 N55C NV65AE CN565S SCN55S MCN250	D51823 NR83AA3 SN890CH/34 IMPULSE 35 FRAMEPRO 70 N65CP NV65AH CN890S	NR90AA PF250S 01XP/751XP N65CP-2	SN890CH2/34 PF350S	

COLLATED FASTENER/TOOL COMPATIBILITY CHART

Huttig-Grip Collated Fasteners fit these tools.

r	astener Type	Tool Brand		Тоо	l Model	
	"GSW"-Style	Hitachi	N5021A			
6 GA CROWN	Wide Crown Staple	Paslode	3150-W16	S150-W16R	3200-W16	S200-W16R
APLE			MU-112-W16R			
		I	1			
^	"P"-Style	Duo-Fast	BN- 1832	KN-1848	KN1848A	KG-1836
6 GA CROWN	Wide Ćrown Staple	Hitachi	N3804	N3804A	N3804AB3	
		Makita	AT638			
		Max	TA238/18-6			
		Porter-Cable	NS100	NS100A	NS150	NS150B
		Ridgid	R150FSA	R150FSE		
		Senco	FINISH PRO 2N1	LN4450	KMN4450	SKS-L
			SLS15	SLS18		
		I				
6	"BCS"-Style	Bostitch	438S4	538S4	650S4-1	
6 _{GA}	Medium Crown Staple		750S4	850S4	·	
		1	1	·		
	"GS"-Style	Hitachi	N5010A			
6ga	Medium Crown Staple	Paslode	3150-S16	IM200-S16	MA-S16L	S200-S16
		1	1			
\sim	"N"-Style	Hitachi	N5008AA	N5008AB	N5008AC	N5008AAAC2
GA M CROWN	Medium Crown Staple	Max	TA551/16-11	TA551A/16-11	110000710	14000071111102
STAPLE		Porter-Cable	MS200	7,007,010		
		Senco	M1	M2	SKS N12-N17	SNS40
		Cerico	SNS44XP	SNS50XP	SNS200XP	311340
			SNO44XI	JIVJJUNI	3N3200XI	
	"I " Chulo	Duo-Fast	BN- 1832	KN-1848	KN-1848A	KG-1836
8,	"L"-Style Narrow Crown Staple	Hitachi	N3804	N3804A	N3804AB3	KG-1030
TAPLE		Makita	AT638	113004A	N3004AD3	
		Max	TA238/18-6			
		Porter-Cable	NS100	NS100A	NS150	NS150B
					113100	NSTOOD
		Ridgid	R150FSA	R150FSB	KWWIAAEO	SKS-L
		Senco	FINISH PRO 2N1		KMN4450	2V2-F
			SLS15	SLS18		
		Arrow	HT-50	HT-55	T-50	
11	"A11"-Style Tacker Staple		PHT150C	TR100	TR200	TDEEOO
ER STAPLE	Γ -	Bostitch Due Foot		11/1/10	1 K2UU	TRE500
		Duo-Fast	SLAPSHOT	D11		
		Rapid	A11	R11	DC0705	
		Senco	85000	85060	PC0705	
_		B	110			
19	"A19"-Style Tacker Staple	Rapid	A19			
ER STAPLE			R19			
		l .	1			
HCR	"SHCR"-Style Tacker Staple	Bostitch	H2B			
ER STAPLE	racker Stapie					
		I				
CR	"STCR"-Style Tacker Staple	Bostitch	H30-8	PC2K	PC4000	T6-8
ER STAPLE	racker Staple	Rapid	31			

COLLATED FASTENER/TOOL COMPATIBILITY CHART

Huttig-Grip Collated Fasteners fit these tools.

	Fastener Type	Tool Brand		Tool	Model		
		Bostitch	BTFP72155	GFN1564	DA1564K		
15 _{GA}	15 gauge "DA"-style Angled Finish Nail	DeWalt	D51276K	GI W1304	DATOUAN		
ANGLED NAIL		Duo-Fast					
			DAFN-6480	NT/FOA	NIT/FNAA 4		
		Hitachi	NT65AA	NT65GA	NT65MA4		
		Makita	AF631	AF632	AF633		
		Max	NF510/15-50	NF550/15-65	D 4 0 5 0 4	DAEN (400	
		Porter-Cable	CDA250	DA250	DA250A	DAFN-6480	
		Ridgid	R250AFE				
		Senco	SFN1	SFN40	FINISHPRO 42	2XP 	
		Senco	FINISHPRO 35	GT65DA			
			1				
15 _{ca}	15 gauge "FN"-style Angled Finish Nail	Bostitch	BTFP72156	N62FN	N62FNK-2	N60FN	
ANGLED NAIL	Angled I mish Half	Max	NF510/15-50	NF665/15			
		5 W W	DE40E2:				
16 _{sa} 16	16 gauge "SF"-style	DeWalt	D51257K				
STRAIGHT NAIL	Angled Finish Nail	Duo-Fast	SURE SHOT 764				
		Hitachi	NT65GS				
		Max	NF565/16				
		Paslode	902000	T250S-F16			
		Ridgid	R250SFE				
		Senco	FUSION F-16S	FINISHPRO 32			
		i e					
18	18 gauge Brad Nail	Bostitch	BT1855	SB-1850BN	BTFP12233		
BRAD NAIL		DeWalt	D51236	D51238	DWFP12231		
		Duo-Fast	SURE SHOT 44	50	SURE SHOT 4	450 ST	
		GREX	1832	1850	1850GB		
		Hitachi	NT32AE	NT50AE	NT50AE2		
		Paslode	901000	T200-F18			
		Ridgid	R213BNE				
23	23 gauge Pin Nail	Bostitch	HP118K				
PIN NAIL		Duo-Fast	SURE SHOT 23	36			
		Hitachi	NP35A				
		Max	NF2235A	NF235A23-25			
		Porter-Cable	PIN100				
		Ridgid	R138HPA				
		Senco	FINISHPRO 10	FINISHPRO 11	SHP10		

Manufacturer/Tool Models for use with Huttig-Grip Collated Fasteners

TOOL/COLLATED FASTENER COMPATIBILITY CHART

Tool Brand	Fastener Type			Tool	Model		
Arrow	"A11"-Style Tacker Staple	HT-50	HT-55	T-50			
D 414 - 1-	Coil Roofing	RN45	RN45B	RN46	RN46-1		
Bostitch	21° Plastic Round Head	F21PL	F21PL2	LPF21PL	N79RH	RN90	
	28° Wire Weld Offset Round Head	F28WW	GF28WW	LPF28WW6	N80SB		
	30° Paper Tape Nail	F33PT	LP33PT	N79PT	N90PT		
	15° Wire Weld	N50C	N55C	N65CP	N65CP-2		
	30° Joist Hanger	MCN150	MCN250				
	"BCS"-Style Medium Crown Staple	438S4	538S4	650S4-1	750S4	850S4	
	"A11"-Style Tacker Staple	PHT150C	TR100	TR200	TRE500		
	"SHCR"-Style Tacker Staple	H2B					
	"STCR"-Style Tacker Staple	H30-8	PC2K	PC4000	T6-8		
	15 gauge "DA"-style Angled Finish Nail	BTFP72155	GFN1564	DA1564K			
	15 gauge "FN"-style Angled Finish Nail	BTFP72156	N62FN	N62FNK-2	N60FN		
	18 gauge Brad Nail	BT1855	SB-1850BN	BTFP12233			
	23 gauge Pin Nail	HP118K					
DeWalt	21° Plastic Round Head	D51844	D51845				
Jorran	30° Paper Tape Nail	DCN692	D51822	D51823			
	15 gauge "DA"-style Angled Finish Nail	D51276K					
	16 gauge "SF"-style Angled Finish Nail	D51257K					
	18 gauge Brad Nail	D51236	D51238	DWFP12231			
Duo-Fast	Coil Roofing	DRN-45	RN-175				
- uo : uo:	21° Plastic Round Head	CN-137	CN-350	CN-350B	FDF350CN	SNP-83	
	28° Wire Weld Offset Round Head	CN-325B					
	"P"-Style Wide Crown Staple	BN- 1832	KN-1848	KN1848A	KG-1836		
	"L"-Style Narrow Crown Staple	BN- 1832	KN-1848	KN-1848A	KG-1836		
	"A11"-Style Tacker Staple	SLAPSHOT					
	15 gauge "DA"-style Angled Finish Nail	DAFN-6480					
	16 gauge "SF"-style Angled Finish Nail	SURE SHOT 76	54				
	18 gauge Brad Nail	SURE SHOT 44	150	SURE SHOT 4	450 ST		
	23 gauge Pin Nail	SURE SHOT 23	336				
GREX	18 gauge Brad Nail	1832	1850	1850GB			
Hitachi	Coil Roofing	NV45AB2	NV45AE				
	21° Plastic Round Head	NR83	NR83A2	NR90AE	NR90AEPR		
	28° Wire Weld Offset Round Head	NR90AF					
	30° Paper Tape Nail	NR83AA	NR83AA2	NR83AA3	NR90AA	NR90AD	NR90GC
	15° Wire Weld	NV65AB	NV65AE	NV65AH	NV75AG		
	30° Joist Hanger	NR65AK	NR65AK(S)	NR65AK	NR65AK(S)		
	"GSW"-Style Wide Crown Staple	N5021A					
	"P"-Style Wide Crown Staple	N3804	N3804A	N3804AB3			
	"GS"-Style Medium Crown Staple	N5010A					
	"N"-Style Medium Crown Staple	N5008AA	N5008AB	N5008AC	N5008AAAC2		
	"L"-Style Narrow Crown Staple	N3804	N3804A	N3804AB3			
	15 gauge "DA"-style Angled Finish Nail	NT65AA	NT65GA	NT65MA4			
	16 gauge "SF"-style Angled Finish Nail	NT65GS					
	18 gauge Brad Nail	NT32AE	NT50AE	NT50AE2			
	23 gauge Pin Nail	NP35A					

TOOL/COLLATED FASTENER COMPATIBILITY CHART

Manufacturer/Tool Models for use with Huttig-Grip Collated Fasteners

Tool Brand	Fastener Type			Too	Model		
Makita	Coil Roofing	AN451	AN453				
Ivianita	21° Plastic Round Head	AN922	AN923	AN8300			
	30° Paper Tape Nail	AN942	AN943				
	"P"-Style Wide Crown Staple	AT638					
	"L"-Style Narrow Crown Staple	AT638					
	15 gauge "DA"-style Angled Finish Nail	AF631	AF632	AF633			
Max	Coil Roofing	CN445R	CN445R2	CN450R			
Mux	21° Plastic Round Head	GS683RH-EX	SN80	SN883RH2	SN890RH		
	28° Wire Weld Offset Round Head	SN883CH/28	SN890CH/28				
	30° Paper Tape Nail	SN883CH/34	SN890CH/34	SN890CH2/34			
	15° Wire Weld	CN565D	CN565S	CN890S			
	"P"-Style Wide Crown Staple	TA238/18-6					
	"N"-Style Medium Crown Staple	TA551/16-11	TA551A/16-11				
	"L"-Style Narrow Crown Staple	TA238/18-6					
	15 gauge "DA"-style Angled Finish Nail	NF510/15-50	NF550/15-65				
	15 gauge "FN"-style Angled Finish Nail	NF510/15-50	NF665/15				
	16 gauge "SF"-style Angled Finish Nail	NF565/16					
	23 gauge Pin Nail	NF2235A	NF235A23-25				
Paslode	Coil Roofing	R-175C	3175/44RCU				
1 usiouc	21° Plastic Round Head	5325/SRH	5350/SRH-20				
	30° Paper Tape Nail	5300	900420	IMPULSE 35	PF250S	PF350S	F350S PM PLUS
	30° Joist Hanger	5250/65S PP	5250S PP	F250S-PP	PF150S-PP		
	"GSW"-Style Wide Crown Staple	3150-W16	S150-W16R	3200-W16	S200-W16R	MU-112-W16R	
	"GS"-Style Medium Crown Staple	3150-S16	IM200-S16	MA-S16L	S200-S16		
	16 gauge "SF"-style Angled Finish Nail	902000	T250S-F16				
	18 gauge Brad Nail	901000	T200-F18				
Pnue Tools	30° Joist Hanger	RN150	RN250	RNS150	RNS250		
Porter	Coil Roofing	134R	RN175	RN175A			
Cable	21° Plastic Round Head	FR350					
	28° Wire Weld Offset Round Head	FM350	FM350A				
	30° Paper Tape Nail	FC350	FC350A				
	"P"-Style Wide Crown Staple	NS100	NS100A	NS150	NS150B		
	"N"-Style Medium Crown Staple	MS200					
	"L"-Style Narrow Crown Staple	NS100	NS100A	NS150	NS150B		
	15 gauge "DA"-style Angled Finish Nail	CDA250	DA250	DA250A	DAFN-6480		
	23 gauge Pin Nail	PIN100					

TOOL/COLLATED FASTENER COMPATIBILITY CHART

Manufacturer/Tool Models for use with Huttig-Grip Collated Fasteners

Tool Brand	Fastener Type			Tool	Model		
Rapid	"A11"-Style Tacker Staple	A11	R11				
	"A19"-Style Tacker Staple	A19	R19				
	"STCR"-Style Tacker Staple	31					
Ridgid	Coil Roofing	R175RNE					
	21° Plastic Round Head	R350RHE					
	30° Paper Tape Nail	R350CHE					
	"P"-Style Wide Crown Staple	R150FSA	R150FSE				
	"L"-Style Narrow Crown Staple	R150FSA	R150FSB				
	15 gauge "DA"-style Angled Finish Nail	R250AFE					
	16 gauge "SF"-style Angled Finish Nail	R250SFE					
	18 gauge Brad Nail	R213BNE					
	23 gauge Pin Nail	R138HPA					
Senco	Coil Roofing	SCN40R	SCN200R	RoofPro 450	RoofPro 455XP		
Octioo	21° Plastic Round Head	SN60	SN65	SN902XP	GT90FRH	FRAMEPRO502	FAMEPRO650
	30° Paper Tape Nail	FRAMEPRO 601	/651	FRAMEPRO 70	1XP/751XP	SN901XP	
	15° Wire Weld	SCN49	SCN55S	SCN56			
	"P"-Style Wide Crown Staple	FINISH PRO 2N1	LN4450	KMN4450	SKS-L	SLS15	SLS18
	"N"-Style Medium Crown Staple	M1	M2	SKS N12-N17	SNS40	SNS44XP	SNS50XP
		SNS200XP					
	"L"-Style Narrow Crown Staple	FINISH PRO 2N1	LN4450	KMN4450	SKS-L	SLS15	SLS18
	"A11"-Style Tacker Staple	85000	85060	PC0705			
	15 gauge "DA"-style Angled Finish Nail	SFN1	SFN40	FINISHPRO 42)	(P	FINISHPRO 35	GT65DA
	16 gauge "SF"-style Angled Finish Nail	FUSION F-16S	FINISHPRO 32				
	23 gauge Pin Nail	FINISHPRO 10	FINISHPRO 11	SHP10			



Huttig Building Products Limited Warranty for Huttig-Guard Professional, Premium, Platinum, or Stainless Steel Fasteners

What Does This Warranty Cover?

This limited warranty applies to the first retail purchaser of Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners (also referred to herein as the "Fasteners"). Huttig Building Products warrants that such fasteners will be free from any defects in material and workmanship for the specified warranty period for the original project for which it was installed when used in accordance with the recommendations listed in the Huttig-Grip Fasteners Catalog or elsewhere by Huttig Building Products. Please note that all metal fasteners have the potential to corrode. There are no warranties (including any of warranty of merchantability) that extend beyond the foregoing and such warranty applies to Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners only.

Product	Warranty Period
Professional	15 Years
Premium	50 Years
Platinum	Lifetime
Stainless Steel	Lifetime

Who is Entitled to the Warranty and How Long Does The Coverage Last?

This warranty is granted to the first retail purchaser only, is not transferable and lasts for the product specified warranty period for the project for which it was originally installed.

What Will Huttig Building Products Do?

Huttig Building Products will replace the defective Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners with like or equivalent product. Any labor for installation, removal or other material charges are not covered by this limited warranty.

What Does This Warranty Not Cover?

This warranty does not cover issues caused by:

- Any defect due to environmental conditions or inadequate or improper handling, transportation, storage or maintenance,
- Failure or damage caused by improper installation (including chipped coating during installation), application, improper preparation, the building site, any 3rd party products, inadequate structure design, reuse or reinstallation of the fastener,
- Failure or damage caused by wood destroying insects, animals, wood fungus, mold, mildew, exposure to chemicals or other hazardous substances, a corrosive environment or materials, standing water, or premature deterioration of building materials,
- Failure or damage used in a structure that does not comply with all local, state and federal building codes, laws, rules and regulations,
- Use of fasteners in extreme temperatures or extreme environmental conditions,
- Fasteners subjected to negligence, excessive or improper use, willful misconduct, actions or inactions by the installer (general contractors, owners, third party builders),
- · Wear or damage due to traffic involving motorized vehicles.

Huttig Building Products' liability is limited to the replacement of the defective product only except in the event replacement of the product is not available, then a refund of the purchase price of the defective product.

How Do You File A Claim?

If the performance of Huttig-Guard fasteners does not meet the stated limited warranty, the original purchaser must contact Huttig Building Products to initiate a claim. Please use the Defective Product Warranty Claim Form found at https://huttig.com/warranty.

Information required for claim:

Customer Information:

First Name, Last Name Street Address, City, State, Zip E-mail address Telephone number

Product Information & Claim Details:

Purchase Date
Purchase Receipt
Product Name, including Color
Quantity Purchased
Quantity Defective
Date Installed
Where Installed (back yard, pool area, et cetera)
Application (fence, deck, et cetera)

Include photos of structure and defective product along with original box and receipt.

Initiate claim by email at warranty@huttig.com or by mail:

Huttig Building Products ATTN: TQMP 555 Maryville University Drive Suite 400 St. Louis, MO 63141

This warranty is subject to revision without notice.

THIS WRITING CONTAINS THE ENTIRE AGREEMENT BETWEEN HUTTIG BUILDING PRODUCTS AND THE CONSUMER PURCHASER. ALL WARRANTIES, WHETHER EXPRESSED OR IMPLIED, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXCLUDED EXCEPT AS OTHERWISE SPECIFICALLY SET FORTH HEREIN. HUTTIG BUILDING PRODUCTS' LIABILITY IS LIMITED TO THE PURCHASE PRICE OF THE DEFECTIVE PRODUCT. IN NO EVENT ARE CONSEQUENTIAL OR INCIDENTAL DAMAGES RECOVERABLE UNDER THIS WARRANTY.



PHOENIX, AZ

3601 N. 34th Avenue Phoenix, AZ 85017 PH: 800-524-6255 FX: 602-269-5601

SACRAMENTO, CA

8120 Power Ridge Road Sacramento, CA 95826 PH: 800-952-8614 FX: 800-442-4745

SOUTHERN CA

8865 Utica Avenue

Unit B

Rancho Cucamonga, CA 91730

PH: 800-959-9237 FX: 909-483-4283

NEWINGTON, CT

407 Alumni Road Newington, CT 06111 PH: 888-727-8429 FX: 860-667-4289

DAVENPORT, FL

45150 Highway 27 Davenport, FL 33897 PH: 800-866-1064 FX: 863-420-3883

FORT MYERS, FL

3580 Work Drive Fort Myers, FL 33916 PH: 800-333-1942 FX: 239-332-7806

JACKSONVILLE, FL

5203 W. 1st Street Jacksonville, FL 32254 PH: 800-353-6696 FX: 904-378-0980

RIVIERA BEACH, FL

7835 Central Industrial Drive Suite 200

Riviera Beach, FL 33404 PH: 800-777-3887 FX: 877-391-8020

ELKHART, IN

30244 County Road 12 Elkhart, IN 46514 PH: 800-348-7628 FX: 574-262-1174

AUGUSTA, ME

7 Gaywalk Street Augusta, ME 04330 PH: 800-870-6000 FX: 800-354-6205

SACO, ME

65 Spring Hill Road Saco Industrial Park Saco, ME 04072 PH: 800-868-2793 FX: 800-622-0139

TAUNTON, MA

25 John Hancock Road Taunton, MA 02780 PH: 866-854-8639 FX: 508-822-1691

CAPE GIRARDEAU, MO

4072 Nash Road Cape Girardeau, MO 63701 PH: 800-866-0020 FX: 800-866-3293

JACKSON, MS

240 NW Industrial Parkway Jackson, MS 39213 PH: 800-866-0101 FX: 800-825-3291

ALBUQUERQUE, NM 8333 Washington Place NE

Suite H Albuquerque, NM 87113 PH: 800-999-1678 FX: 800-477-9003

CENTRAL NH

25 Lehoux Drive Hooksett, NH 03106 PH: 800-451-4271 FX: 800-237-8061

ROCKY MOUNT, NC

3375 N. Wesleyan Boulevard Rocky Mount, NC 27804 PH: 800-467-0674 FX: 252-446-4279

MEDFORD, OR

2194 Sage Road Medford, OR 97501 PH: 800-452-8803 FX: 541-773-2598

TIGARD, OR

8100 SW Hunziker Street Tigard, OR 97223 PH: 800-452-5813 FX: 503-684-4364

LANCASTER, PA

3639 Hempland Road Lancaster, PA 17601 PH: 866-406-1172 FX: 800-541-4676

LATROBE, PA

123 BenBilt Place Greensburg, PA 15601 PH: 800-830-7394 FX: 800-830-7395

WILKES-BARRE, PA

350 Lasley Avenue Hanover Township, PA 18706

PH: 800-432-8055 FX: 570-829-0681

GREENVILLE, SC

36 W. Lenhardt Road Piedmont, SC 29673 PH: 800-866-0050 FX: 800-388-7180

DALLAS, TX

2115 Valley View Lane Farmers Branch, TX 75234

PH: 866-225-4150 FX: 972-620-9294

AUBURN, WA

525 "C" Street NW Auburn, WA 98001 PH: 800-234-5534 FX: 253-735-9370

HUTTIG XPRESS DIRECTS

PH: 800-933-0660