

HUTTIG-GRIP™

FASTENERS

CATALOG



HUTTIG
BUILDING PRODUCTS
A WOODGRAIN COMPANY

HGFASTCAT
07/2022

A STRONG FOUNDATION

For over 137 years, Huttig Building Products has been helping to build the American dream. Founded in 1865 by brothers Charles and William Huttig, Huttig understands the value of teamwork, commitment, and what it takes to be successful every day and for years to come.

Over the years, Huttig has grown and continuously transformed itself to better meet the needs of its customers and suppliers. What started out as a saw mill and lumberyard has evolved to become America's only national distributor of millwork and specialty building products. With 25 distribution centers and access to 75% of US housing market and growing, Huttig is the country's largest wholesale value-added distributor of millwork products such as interior and exterior doors.

This spirit of service and innovation lead Huttig to create the Huttig-Grip brand of fasteners.

- ▶ Developed by a team of industry experts that know the products, know the business, know what dealers need to sell more fasteners
- ▶ Packaging completely redesigned for painless execution and flawless presentation at point of purchase.
- ▶ Available nationwide through Huttig's broad distribution network
- ▶ Global sourcing network ensures reliable, diverse supply of fastener
- ▶ Warehouse AND direct programs; Huttig provides experienced support across a variety of platforms to fit your changing business needs.

The ability to supply a diverse mix of products ranging from specialty doors & millwork, to building materials & construction fasteners makes Huttig's value proposition unparalleled in the industry.



BUILT BETTER BY DESIGN

The Huttig-Grip™ fasteners program was developed by a team of industry experts to solve the pain points with existing lines, plus provide a single source for all fastener categories.

The result is the Huttig-Grip Fasteners family of products, encompassing all types and all phase of construction;

- ▶ **HUTTIG-GRIP™** construction fasteners
- ▶ **HUTTIG-GUARD™** exterior screws & stainless steel fasteners
- ▶ **HUTTIG-SPIN™** professional drywall & steel framing screws

Nails & Screws

Designed to work for you and for your customers, the Huttig-Grip program is built around 1 lb. and 5 lb. master cartons having the same width and height, simplifying stocking and merchandising. Nails and screws are also available in buckets and bulk boxes.

Collated Fasteners

Stocking Huttig-Grip collated fasteners allows you to offer the optimal mix for your market, reduce the number of vendors, and streamline the assortment for improved sales and inventory turns.

Stainless Steel

Huttig-Guard stainless steel screws, nails, and collated fasteners round out your fasteners section and ensure that you can meet the requirements in demanding applications.

THE DIFFERENCE IS IN THE DETAILS

MASTER CARTONS

Same-size master cartons simplify and organize your fastener section; easy to merchandise, creates an improved shopping experience.

Easy-tear rip-cord tear from back, no tools required, clean perforation on the carton face



"Fence system" keeps the inner boxes merchandised, on the shelf, without blocking product or information

Same height and width 1 lb. and 5 lb. master cartons are easy to stock, easy to mix, significantly improve shelf appearance

Functional design keeps fasteners contained, preventing loss & theft

- Label seals the box top
- Bottom folds inward, contents keep it closed



- Boxes constructed using microflute material, for same or more strength than the others with less weight.
- Microflute also allows for stronger crease lines for tighter packing with less crushing.

1 & 5 LB. PACKAGES

Labels are thoughtfully designed to lead customers to the general application, then to the type of fastener, and ultimately to the exact nail or screw.

- Largest window on the market
- Strongest & thickest acetate prevents fasteners from poking through
 - High visibility minimizes boxes torn open to see content

5 lb. box contains same amount of product but smaller footprint than competitors = less wasted space



ANATOMY OF THE LABEL

- 1 Vertical banner highlights most common application
- 2 Fastener type and size in large, easy-to-read font
- 3 Actual-size fastener photo shows exactly what is in the box
- 4 Finish icon system makes it easy to spot fastener finish
- 5 Background photo provides application information
- 6 Application in text
- 7 Approximate quantity to purchase what's needed
- 8 Screws icon system quickly identifies key attributes

COMPLETE PROGRAM

HAND DRIVE BULK & COLLATED

Our distinctive, informative, eye-catching approach to packaging is the foundation of our bulk and collated nail programs.



Handle system on bulk nails, bulk screws, and 21° collated nail boxes make them easier to carry **HG**

Standard 10"x10" footprint on bulk nail, screw, and 21° boxes simplifies merchandising and back-stocking

COLLATED FASTENERS

Huttig-Grip collated fasteners work flawlessly with practically every make and model on the market today.

- Framing Nails
- Joist Hanger Nails
- Coil Roofing Nails
- Siding/Fencing Nails
- Medium & Wide Crown Staples
- Narrow Crown & Tacker Staples
- Finish & Brad Nails
- Tub Program also available
- Stainless steel available



COLLATED FINISH & TRIM FASTENERS

- 15 Gauge & 16 Gauge Finish Nails
- 18 Gauge Brad Nails
- Narrow Crown Staples
- Tacker Staples
- 23 Gauge Pin Nails
- Stainless steel available

Available in box or clamshell programs:

- Boxes are easy to merchandise, upright or stacked, to maximize shelf utilization
- Clamshells offer smaller pack quantities for convenience or specialty projects



TABLE OF CONTENTS

Construction Fasteners	1
Huttig-Grip General Construction Nails	4
Huttig-Grip Outdoor Construction Fasteners	16
Huttig-Grip Roofing/Siding Nails	27
Huttig-Grip Drywall Nails	36
Huttig-Guard Stainless Steel Nails	39
Wood & Exterior Screws	47
Huttig-Grip Wood Screws	49
Huttig-Guard Exterior Screws	54
Huttig-Guard Stainless Steel Screws	62
Drywall & Steel Framing Fasteners	68
Huttig-Grip Drywall Screws	69
Huttig-Spin Drywall & Steel Framing Fasteners	71
Collated Fasteners	86
Huttig-Grip Collated Roofing, Framing, Siding Nails	90
Huttig-Grip Collated Staples	101
Huttig-Grip Finish & Trim Nails	107
Huttig-Guard Collated Stainless Steel Fasteners	113
Specialty Programs	122
Reference Materials	130
Finish Icons & Explanations	131
Common Construction Screw Attributes	133
Outdoor Screw Attributes	134
Huttig-Guard Warranty	135

Product availability varies by location.



Construction Fasteners

HUTTIG-GRIP™ & HUTTIG-GUARD™ NAILS & STAPLES



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

HUTTIG-GRIP™ Construction Fasteners

Nails & staples typically used with **residential** and/or **wood** structures and projects.

Color coded packaging help guide you to the four main categories by application.

- GENERAL
CONSTRUCTION
- OUTDOOR
CONSTRUCTION
- ROOFING & SIDING
- DRYWALL

GENERAL CONSTRUCTION NAILS

Indoors or environments where fastener will not be directly exposed to moisture or other potentially corrosive conditions. Limited or no resistance to corrosion.

APPLICATIONS

- Finish/Trim
- Flooring
- Forming

- Framing
- Masonry
- Pole Barn

FINISHES

BRTBRIGHT

VCVINYL COATED

OUTDOOR CONSTRUCTION NAILS & STAPLES

Outdoor applications or where fastener may be exposed to moisture - have additional protection against rust & corrosion.

APPLICATIONS

- Fence/Deck
- Finish/Trim
- Framing

- Landscaping
- Pole Barn
- Poultry Netting

FINISHES

EGELECTRO GALVANIZED

HGHOT GALVANIZED

OGOUTDOOR GALVANIZED

ROOFING & SIDING NAILS

Nails designed for use with specific types of roofing, including asphalt, metal, and tile, and specific types of siding, including aluminum, vinyl, and wood. May or may not have protection against rust & corrosion, depending upon application and finish.

APPLICATIONS

- Roofing
- Siding
- Trim

- Exterior Lath/Stucco
- Gutters

FINISHES

EGELECTRO GALVANIZED

HGHOT GALVANIZED

AIALUMINUM

CUCOPPER

DRYWALL NAILS

Nails for securing gypsum board or for installing lath in preparation for plaster. Limited or no resistance to corrosion.

APPLICATIONS

- Drywall to Wood

- Interior Lath/Plaster

FINISHES

BRTBRIGHT

PCPHOSPHATE COATED

VCVINYL COATED

BLBLUED

Product availability varies by location.

Construction Fasteners

HUTTIG-GRIP™ NAILS & STAPLES

Huttig-Grip General Construction Nails

Finish/Trim.....

Flooring.....

Forming.....

Framing.....

Masonry.....

Pole Barn/Landscaping.....

Huttig-Grip Outdoor Construction Nails & Staples

Fence/Deck.....

Fencing.....

Finish/Trim.....

Framing.....

Landscaping.....

Masonry.....

Pole Barn.....

Speciality.....

Huttig-Grip Roofing & Siding Nails

Roofing.....

Roofing/Siding.....

Siding.....

Siding/Trim.....

Speciality.....

Stucco/Exterior Lath.....

Huttig-Grip Drywall Nails

Drywall.....

Interior Lath.....

!

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

Finish Nail

For attaching trim and moulding.

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Cupped head for ease of concealment
- Diamond point

Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT							
1-1/4"	3d	.067"	.099"	Smooth	693	HGN3F1	HGN3F5 HGN3F
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4F1	HGN4F5
1-3/4"	5d	.072"	.106"	Smooth	425	HGN5F1	—
2"	6d	.092"	.135"	Smooth	267	HGN6F1	HGN6F5
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8F1	HGN8F5
3"	10d	.113"	.155"	Smooth	109	HGN10F1	HGN10F5
3-1/4"	12d	.113"	.155"	Smooth	90	HGN12F1	—
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16F1	HGN16F5

Cut Flooring Nail

For laying tongue and groove softwood and hardwood flooring.

- Tempered hardened steel for harder, less brittle nail
- Blunt point and tapered shank minimize splitting in wood
- Flat, rectangular head



Size	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
TEMPERED HARDENED STEEL - BRIGHT				
1-1/2"	4d	165	HGN4CUTFL1	—
2"	6d	104	HGN6CUTFL1	HGN6CUTFL5
2-1/4"	7d	88	HGN7CUTFL1	HGN7CUTFL5
2-1/2"	8d	78	HGN8CUTFL1	HGN8CUTFL5
3"	10d	53	—	HGN10CUTFL
3-1/2"	16d	35	HGN16CUTFL1	HGN16CUTFL5

Flooring Nail

For attaching hardwood strip flooring to subfloor.

- Tempered hardened steel for harder, less brittle nail
- Spiral shank prevents loosening of nail, reduces squeaks



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
TEMPERED HARDENED STEEL - BRIGHT						
2-1/4"	7d	.113"	—	Spiral	160	HGN7FLR1 HGN7FLR5
2-1/2"	8d	—	—	Spiral	110	HGN8FLR1

Underlayment Nail

For attaching composition underlayment or plywood over subfloor or existing floors.

- Flat head seats flush against surface
- Diamond point



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT							
1-1/4"	.099"	1/4"	Annular Thread	332	HGN114ATUL1	HGN114ATUL5	HGN114ATUL
1-3/8"	.099"	1/4"	Annular Thread	300	HGN138ATUL1	HGN138ATUL5	—
1-1/2"	.099"	1/4"	Annular Thread	290	HGN112ATUL1	HGN112ATUL5	—
1-7/8"	.099"	1/4"	Annular Thread	199	HGN178ATUL1	HGN178ATUL5	HGN178ATUL
2"	.106"	17/64"	Annular Thread	175	HGN2ATUL1	HGN2ATUL5	—
2-3/8"	.106"	17/64"	Annular Thread	141	HGN238ATUL1	—	—

Available Finish



Available Finish



Available Finish



Duplex Nail

For concrete forms, scaffolding, and other temporary applications.


- Also known as scaffold nail
- Double head and smooth, uncoated shank allow for ease of removal
- Diamond point
- Conforms to ASTM F1667-17

Available Finish



Size*		Shank Diameter	Head Separation	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIGHT									
1-3/4"	6d	.113"	1/4"	Smooth	156	HGN6DUPX1	HGN6DUPX5	—	HGN6DUPX
2-1/4"	8d	.131"	1/4"	Smooth	85	HGN8DUPX1	HGN8DUPX5	HGN8DUPXBK	HGN8DUPX
2-3/4"	10d	.148"	5/16"	Smooth	57	HGN10DUPX1	HGN10DUPX5	—	HGN10DUPX
2-7/8"	12d	.148"	5/16"	Smooth	51	HGN12DUPX1	HGN12DUPX5	HGN12DUPXBK	HGN12DUPX
3"	16d	.162"	3/8"	Smooth	46	HGN16DUPX1	HGN16DUPX5	HGN16DUPXBK	HGN16DUPX
3-1/2"	20d	—	—	Smooth	—	—	—	—	HGN20DUPX

* Length of the nail is measured from beneath the lower head to tip of nail

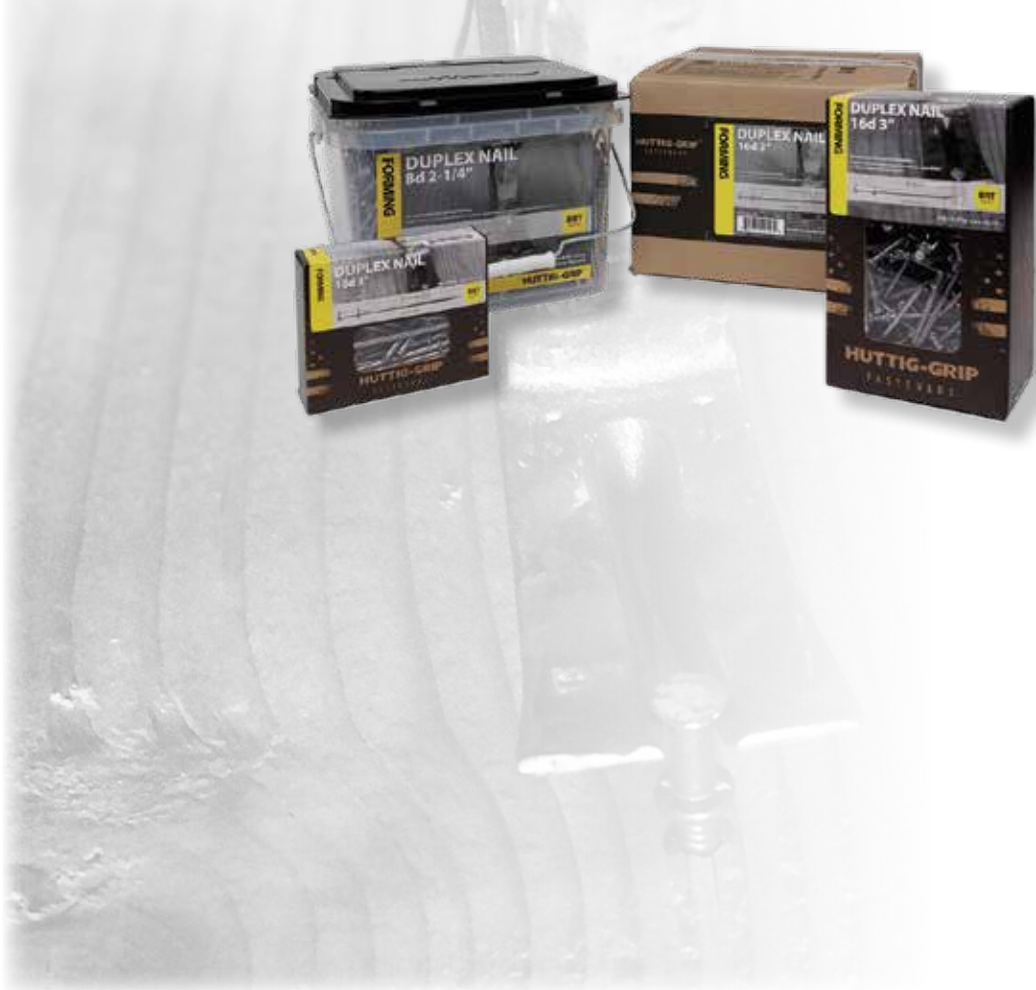

Product availability varies by location.

Box Nail

For light-duty general construction, carpentry, and box making.

- Relatively thinner shank and sharp point minimize splitting in wood
- Smaller shank and head than common nails of the same length
- Flat head sits flush against surface
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box	
BRIGHT								
1-1/2"	4d	—	—	Smooth	374	HGN4BX1	HGN4BX5	—
1-3/4"	5d	—	—	Smooth	357	HGN5BX1	—	—
2"	6d	.099"	.266"	Smooth	225	HGN6BX1	HGN6BX5	—
2-1/2"	8d	.113"	.297"	Smooth	136	HGN8BX1	HGN8BX5	—
3"	10d	.128"	.312"	Smooth	88	HGN10BX1	HGN10BX5	—
3-1/4"	12d	.128"	.312"	Smooth	83	HGN12BX1	HGN12BX5	—
3-1/2"	16d	.135"	.344"	Smooth	69	HGN16BX1	HGN16BX5	HGN16BX
4"	20d	.148"	.375"	Smooth	49	HGN20BX1	HGN20BX5	—



Product availability varies by location.

Common Nail

For heavy-duty general construction and framing.

- Most versatile and popular style of nail
- Heavier shank provides greater resistance to bending
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17



Available Finishes

BRT
BRIGHT


VC
VINYL
COATED

EG
ELECTRO
GALVANIZED

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED

Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIGHT								
1-1/4"	3d	—	Smooth	540	HGN4C1	HGN4C5	—	HGN4C
1-1/2"	4d	.099"	Smooth	268	HGN4C1	HGN4C5	—	HGN4C
2"	6d	.113"	Smooth	167	HGN6C1	HGN6C5	HGN6CBK	HGN6C
2-1/4"	7d	—	Smooth	150	—	HGN7C5	—	—
2-1/2"	8d	.131"	Smooth	104	HGN8C1	HGN8C5	HGN8CBK	HGN8C
3"	10d	.148"	Smooth	67	HGN10C1	HGN10C5	HGN10CBK	HGN10C
3-1/4"	12d	.148"	Smooth	63	HGN12C1	HGN12C5	HGN12CBK	HGN12C
3-1/2"	16d	.162"	Smooth	47	HGN16C1	HGN16C5	HGN16CBK	HGN16C
4"	20d	.192"	Smooth	29	HGN20C1	HGN20C5	HGN20CBK	HGN20C
4-1/2"	30d	.207"	Smooth	110	—	HGN30C5	—	HGN30C
5"	40d	.226"	Smooth	80	—	HGN40C5	—	HGN40C
5-1/2"	50d	—	Smooth	65	—	HGN60C5	—	HGN60C
6"	60d	.262"	Smooth	50	—	HGN60C5	—	HGN60C
2"	6d	—	Ring	—	HGN6RSC1	—	—	—
2-1/2"	8d	—	Ring	—	HGN8RSC1	—	—	—
3-1/2"	16d	—	Ring	—	HGN16RSC1	—	—	—
VINYL COATED								
2-1/2"	8d	.131"	Smooth	150	—	—	—	HGN8CC
3-1/2"	16d	.162"	Smooth	47	—	—	—	HGN16CC

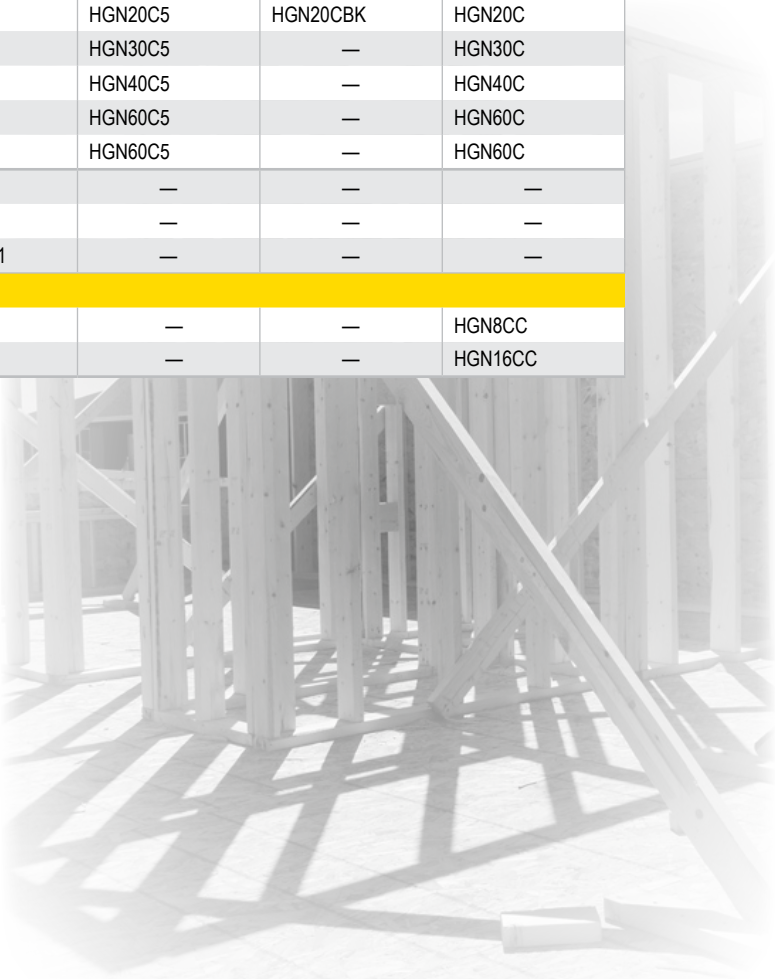

Product availability varies by location.

Joist Hanger Nail

For attaching joist hangers to wood ledgers, headers and beams.

- Heavy gauge allows more surface contact and greater holding power
- Flat head seats flush against surface
- Diamond point



Available Finishes

BRT
BRIGHT

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED

Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIGHT								
2-1/2"	8	0.313"	Smooth	—	—	HGN2128JH5	—	HGN2128JH
1-1/2"	9	0.313"	Smooth	125	HGN1129JH1	HGN1129JH5	HGN1129JHBK	HGN1129JH
1-1/4"	10	0.281"	Smooth	194	HGN11410JH1	HGN11410JH5	—	—
1-1/2"	10	0.281"	Smooth	165	HGN11210JH1	HGN11210JH5	—	HGN11210JH
1-1/4"	11	0.281"	Smooth	—	HGN11411JH1	HGN11411JH5	—	—



Product availability varies by location.

Sinker

For heavy-duty general construction and framing.

- Checkered head to reduce hammer slipping
- Flat, countersunk head
- Diamond point
- Conforms to ASTM F1667-17

Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
VINYL COATED								
1-1/8"	3d	—	Smooth	940	HGN3CSKR1	—	—	—
1-3/8"	4d	.080"	Smooth	530	HGN4CSKR1	HGN4CSKR5	—	HGN4CSKR
1-7/8"	6d	.092"	Smooth	266	HGN6CSKR1	HGN6CSKR5	—	HGN6CSKR
2-3/8"	7d	—	Smooth	220	HGN8CSKR1	HGN7CSKR5	HGN7CSKRBK	HGN7CSKR
2-3/8"	8d	.113"	Smooth	141	HGN8CSKR1	HGN8CSKR5	HGN8CSKRBK	HGN8CSKR
2-7/8"	10d	.120"	Smooth	105	HGN10CSKR1	HGN10CSKR5	HGN10CSKRBK	HGN10CSKR
3-1/8"	12d	.135"	Smooth	81	HGN12CSKR1	HGN12CSKR5	HGN12CSKRBK	HGN12CSKR
3-1/4"	16d	.148"	Smooth	62	HGN16CSKR1	HGN16CSKR5	HGN16CSKRBK	HGN16CSKR
3-3/4"	20d	.177"	Smooth	41	HGN20CSKR1	HGN20CSKR5	—	HGN20CSKR



Product availability varies by location.

Cut Masonry Nail


For attaching furring strips and other materials to cinder block, mortar joints, fresh concrete and brick walls.

- Tempered hardened steel for harder, less brittle nail
- Blunt point and tapered shank minimize splitting in wood
- Flat, rectangular head

Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIGHT - TEMPERED HARDENED STEEL								
1-1/2"	4d	125	HGN4CUTM1	HGN4CUTM5	—	HGN4CUTM		
2"	6d	84	HGN6CUTM1	HGN6CUTM5	—	HGN6CUTM		
2-1/2"	8d	58	HGN8CUTM1	HGN8CUTM5	HGN8CUTMBK	HGN8CUTM		
3"	10d	36	HGN10CUTM1	HGN10CUTM5	—	HGN10CUTM		
3-1/4"	12d	43	—	HGN12CUTM5	—	—		
3-1/2"	16d	26	HGN16CUTM1	HGN16CUTM5	—	HGN16CUTM		

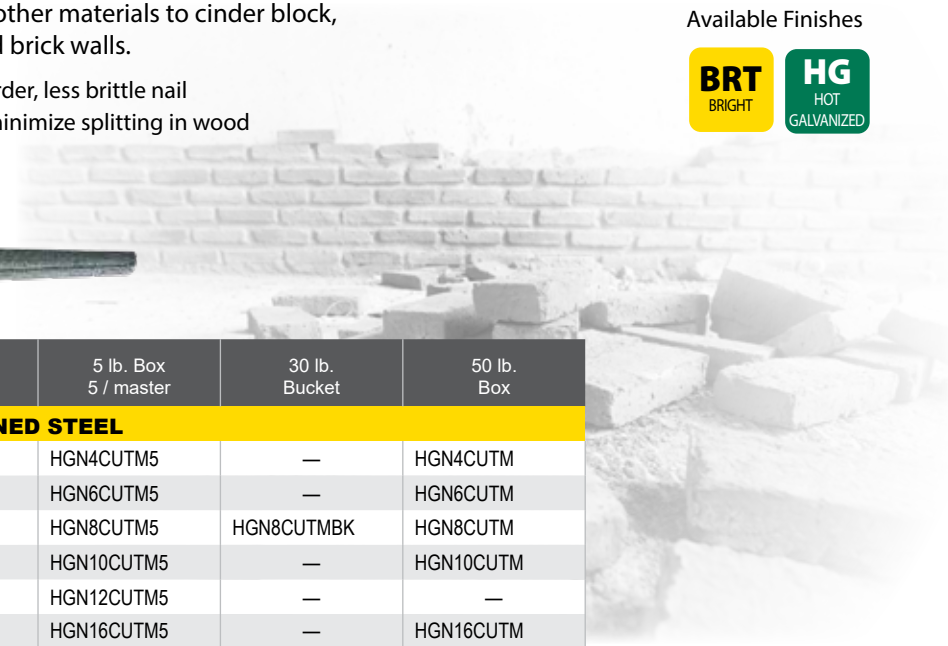

Fluted Masonry Nail


For attaching wood furring strips, studs, or floor plates to fresh concrete.

- Tempered hardened steel for harder, less brittle nail
- Flutes help to minimize cracking and allow debris to surface
- Flat head sits flush against surface
- Diamond point

Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT - TEMPERED HARDENED STEEL							
3/4"	.148"	.313"	Fluted	230	HGN34FM1	HGN34FM5	—
1"	.148"	.313"	Fluted	176	HGN1FM1	HGN1FM5	HGN1FM
1-1/4"	.148"	.313"	Fluted	150	HGN114FM1	HGN114FM5	HGN114FM
1-1/2"	.148"	.313"	Fluted	129	HGN112FM1	HGN112FM5	HGN112FM
2"	.148"	.313"	Fluted	95	HGN2FM1	HGN2FM5	HGN2FM
2-1/2"	.148"	.313"	Fluted	77	HGN212FM1	HGN212FM5	HGN212FM
3"	.148"	.313"	Fluted	68	HGN3FM1	HGN3FM5	HGN3FM
3-1/2"	.162"	.344"	Fluted	48	HGN312FM1	HGN312FM5	—

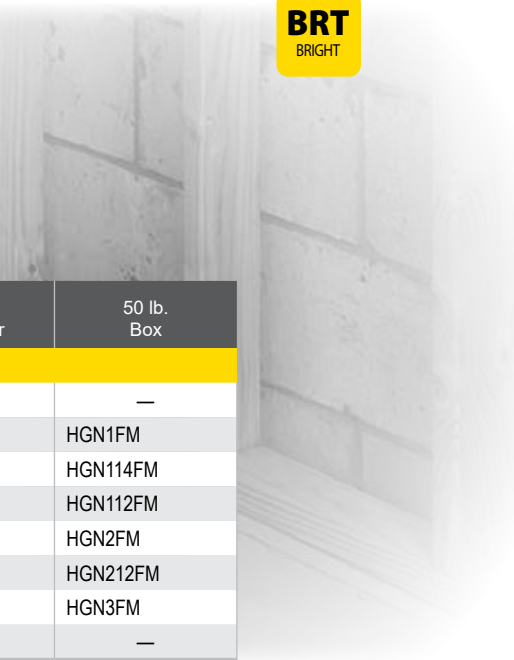

Product availability varies by location.

Round Cap Fluted Masonry Nail

For attaching base sheet or foam insulation to masonry block, parapets, and concrete substrates.

- Tempered hardened steel for harder, less brittle nail
- Oversized head helps to reduce pull-through and tears in substrate.
- Flutes help to minimize cracking and allow debris to surface

Available Finish



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	3 lb. Box 5 / master
BRIGHT - TEMPERED HARDENED STEEL					
1"	8	1"	Fluted	312	HGN1RDTHFM3
1-1/4"	8	1"	Fluted	249	HGN114RDTHFM3
1-1/2"	8	1"	Fluted	210	HGN112RDTHFM3
2"	8	1"	Fluted	156	HGN2RDTHFM3



Pole Barn Nail


For attaching wall framing lumber to pole barn posts.

- Tempered hardened steel for harder, less brittle nail
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	50 lb. Box
BRIGHT - TEMPERED HARDENED STEEL						
4"	20d	.177"	.375"	Ring	35	HGN20RSPB5
5"	40d	.177"	.375"	Ring	27	HGN40RSPB5
6"	60d	.207"	.469"	Ring	23	HGN60RSPB5

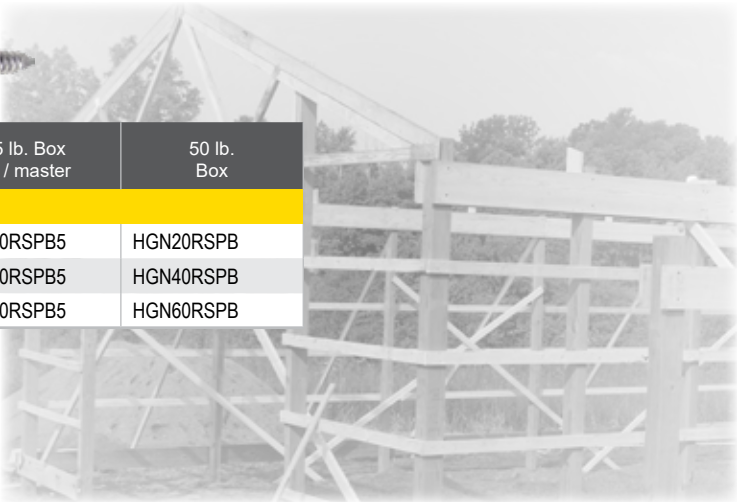

Spike

For securing timbers and other similar landscaping materials.

- Checkered head to reduce hammer slipping
- Flat, countersunk head
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes



Size	Shank	Approx. count / lb.	5 lb. Box 5 / shipper	50 lb. Box
BRIGHT				
8"	Smooth	4	HGN8SPK5	HGN8SPK
10"	Smooth	3	HGN10SPK5	HGN10SPK
12"	Smooth	2	HGN12SPK5	HGN12SPK



Make the right choice for outdoor projects, choose Huttig-Grip galvanized nails.

Huttig-Grip Hot Galvanized and Outdoor Galvanized Nails – Two Solutions to the Same Problems

- ✓ Extend the life of your outdoor project.
- ✓ Minimize staining and "bleeding" from rusting nails.
- ✓ Use Huttig-Grip galvanized nails for extra protection against rust and corrosion.

Steel nails can be compromised by moisture, chemicals in the wood (naturally occurring or treated), and other factors. Coatings and other finishes can be applied for additional protection against corrosion and rust.



HUTTIG-GRIP HOT GALVANIZED NAILS & OUTDOOR GALVANIZED NAILS

- Are recommended for outdoor applications and with treated lumber
- Meet or exceed ASTM A153 Class D requirements for galvanization
- Last longer than non-galvanized nails, extending the life of your project!



OUTDOOR GALVANIZED

- ❑ Recommended for outdoor applications and with treated lumber
- ❑ Meet or exceed ASTM A153 Class D requirements
- ❑ Smoother finish than HG
- ❑ Outperforms HG in ASTM B117-compliant salt spray testing (evaluates approximate lifespan)



HOT GALVANIZED

- ❑ Recommended for outdoor applications and with treated lumber
- ❑ Meet or exceed ASTM A153 Class D requirements
- ❑ Nails or the wire used to make nails may be tumbled or dipped in hot, molten zinc

Huttig-Grip galvanized nails availability varies by market preference; hot galvanized or outdoor galvanized might not be stocked in all areas. Visit huttig.com/warranty for complete limited fastener warranty details.

OG OUTDOOR GALVANIZED		HG HOT GALVANIZED	
OG Outdoor Galvanization is an alternative to HG Hot Galvanization with equal or better corrosion resistance.		HG Hot Galvanization is a traditional process to provide additional protection against corrosive environments and materials.	
ASTM Compliance & Testing			
OG coating thickness is equal to or better than ASTM A153D specifications.		HG coating thickness is equal to or better than ASTM A153D specifications.	
OG outperforms HG in a traditional salt spray test performed according to ASTM B117.		---	
Surface			
<ul style="list-style-type: none">• Smooth, uniform coating for better protection• Reduces tool jamming (when applied to collated nails)		<ul style="list-style-type: none">• Coating may not always be evenly coated or distributed• Zinc may fill threads on ring or spiral shank nails• Increases the diameter/bulk of the nail	
Process			
Primarily two methods to produce OG nails:		Primarily two methods to produce HG nails:	
1. Thermal Diffusion Galvanization	2. EG Electro Galvanized Zinc + Organic Top Coat	1. Formed from Galvanized Wire	2. Dipped in Molten Zinc After Nail Formation (Hot Dipped Galvanization)
<ul style="list-style-type: none">• Nails placed in a cylinder with a dry zinc mixture (zinc/iron), heated, and slowly rotated for several hours (vaporized diffusion process)• Nails are then cleaned and passivated, and dried	<ul style="list-style-type: none">• Nails are first electro galvanized• Electro galvanized nails then painted with an organic coating and baked twice• Organic coating behaves as a barrier between the zinc on the nail and corrosive materials such as the chemicals in treated lumber	<ul style="list-style-type: none">• Carbon steel used to manufacture nails is passed through a tank of molten zinc• The galvanized wire is then used to form nails (most often used for collated nails)	<ul style="list-style-type: none">• Nails are formed from bright carbon steel wire• The formed nails are then dipped twice in molten zinc (more common for hand drive versus collated nails)
Coating is harder than that of other zinc coatings	—	Zinc coating is softer than zinc/iron OG coating	
Thermal Diffusion Galvanization <ul style="list-style-type: none">• Minimal waste• Acid-free cleaning• Environmentally-friendly process	—	Molten Zinc <ul style="list-style-type: none">• Process creates significant waste streams• Acid-pickling (used to prepare the nails after galvanization) is harmful to environment	

HUTTIG-GUARD™ STAINLESS STEEL NAILS

For the ultimate protection against corrosion, choose HUTTIG-GUARD stainless steel nails. Backed by a limited lifetime fastener warranty, HUTTIG-GUARD stainless steel nails are recommended for outdoor applications and with treated lumber, cedar, and redwood. Use HUTTIG-GUARD Grade 316 Stainless Steel nails in marine environments.

Deck Nail

For deck, patio, fence, and other outdoor construction.

- Flat head seats flush against surface
- Diamond point
- Ring shank for use in softer woods and where vibration may be a factor
- Spiral shank for use with harder woods and near board ends to minimize splitting



Ring shank depicted, spiral shank also available

Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
HOT GALVANIZED								
1-3/4"	5d	—	—	Ring	155	HGN5HGRSDK1	—	—
2"	6d	.120"	.281"	Ring	138	HGN6HGRSDK1	HGN6HGRSDK5	HGN6HGRSDK
2-1/2"	8d	.120"	.281"	Ring	106	HGN8HGRSDK1	HGN8HGRSDK5	HGN8HGRSDKBK
3"	10d	.135"	.297"	Ring	78	HGN10HGRSDK1	HGN10HGRSDK5	—
3-1/4"	12d	.135"	.297"	Ring	75	HGN12HGRSDK1	HGN12HGRSDK5	—
3-1/2"	16d	.148"	.313"	Ring	52	HGN16HGRSDK1	HGN16HGRSDK5	HGN16HGRSDKBK
4"	20d	—	—	Ring	33	—	HGN20HGRSDK5	—
2"	6d	.113"	.297"	Spiral	138	HGN6HGSTDK1	HGN6HGRSTDK5	—
2-1/2"	8d	.113"	.297"	Spiral	106	HGN8HGSTDK1	HGN8HGRSTDK5	HGN8HGSTDKBK
3"	10d	.128"	.312"	Spiral	78	HGN10HGSTDK1	HGN10HGRSTDK5	—
3-1/4"	12d	.135"	.344"	Spiral	75	HGN12HGSTDK1	HGN12HGRSTDK5	—
3-1/2"	16d	.135"	.344"	Spiral	52	HGN16HGSTDK1	HGN16HGRSTDK5	HGN16HGSTDKBK
4"	20d	—	—	Spiral	33	HGN16HGSTDK1	HGN16HGRSTDK5	—
OUTDOOR GALVANIZED								
2"	6d	.120"	.281"	Ring	138	HGN6OGRSDK1	HGN6OGRSDK5	—
2-1/2"	8d	.120"	.281"	Ring	106	HGN8OGRSDK1	HGN8OGRSDK5	—
3"	10d	.135"	.297"	Ring	78	HGN10OGRSDK1	HGN10OGRSDK5	—
3-1/4"	12d	.135"	.297"	Ring	75	—	HGN12OGRSDK5	—
3-1/2"	16d	.148"	.313"	Ring	52	HGN16OGRSDK1	HGN16OGRSDK5	—
2"	6d	.113"	.297"	Spiral	138	HGN6OGSTDK1	HGN6OGSTDK5	—
2-1/2"	8d	.113"	.297"	Spiral	106	HGN8OGSTDK1	HGN8OGSTDK5	—
3"	10d	.128"	.312"	Spiral	78	HGN10OGSTDK1	HGN10OGSTDK5	—
3-1/4"	12d	.135"	.344"	Spiral	75	HGN12OGSTDK1	HGN12OGSTDK5	—
3-1/2"	16d	.135"	.344"	Spiral	52	HGN16OGSTDK1	HGN16OGSTDK5	—

Fence Staple

For attaching wire and wire fence to wood fence posts.

- Can also be used to attach suspended ceiling grid to wood rafters
- Conforms to ASTM F1667-17



Available Finish




Leg	Gap Distance	Leg Diameter	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
HOT GALVANIZED						
3/4"	—	—	—	HGN34HGFS1	—	—
1-1/4"	.250"	.1483"	81	HGN114HGFS1	HGN114HGFS5	HGN114HGFS
1-1/2"	.250"	.1483"	71	HGN112HGFS1	HGN112HGFS5	HGN112HGFS
1-3/4"	.250"	.1483"	61	HGN134HGFS1	HGN134HGFS5	HGN134HGFS
2"	.250"	.1483"	53	—	HGN2HGFS5	HGN2HGFS

Poultry Net Staple

For attaching poultry netting to wood frame.

- Narrow 3/16" inside spread to securely fasten poultry netting to wood post or frames
- Conforms to ASTM F1667-17

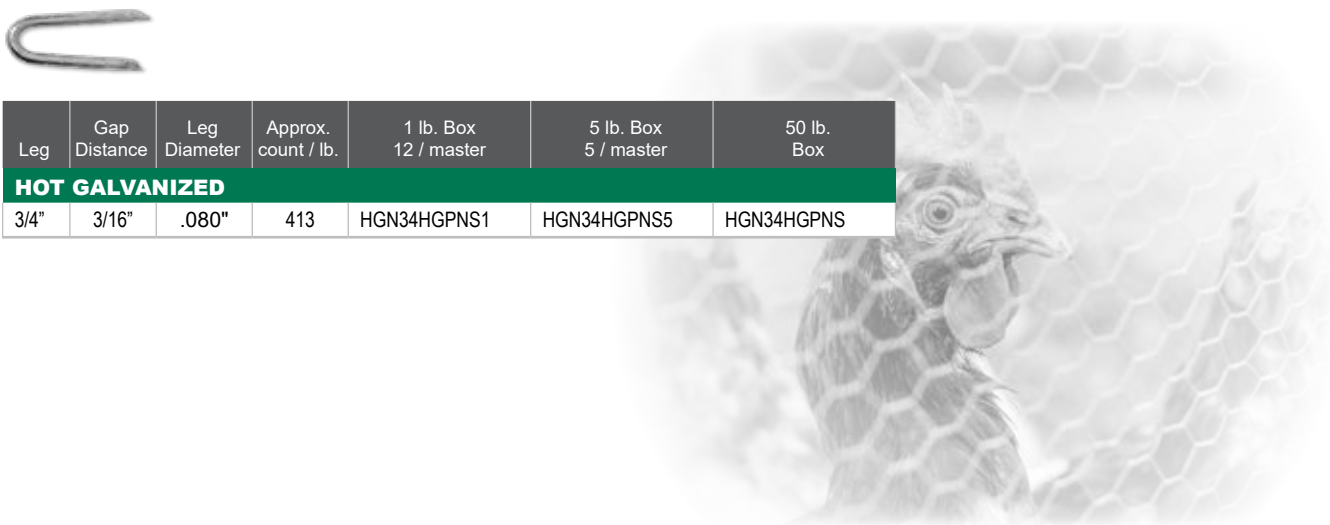

Available Finish



Leg	Gap Distance	Leg Diameter	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
HOT GALVANIZED						
3/4"	3/16"	.080"	413	HGN34HGPNS1	HGN34HGPNS5	HGN34HGPNS

Finish Nail

For attaching trim and moulding.

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Cupped head for ease of concealment
- Diamond point

Available Finishes

EG
ELECTRO
GALVANIZED

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED

BRT
BRIGHT



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
ELECTRO GALVANIZED							
1-1/4"	3d	.067"	.099"	Smooth	693	HGN3EGF1	—
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4EGF1	HGN4EGF5
2"	6d	.092"	.135"	Smooth	267	HGN6EGF1	HGN6EGF5
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8EGF1	HGN8EGF5
3"	10d	.113"	.155"	Smooth	109	HGN10EGF1	HGN10EGF5
3-1/4"	12d	.113"	.155"	Smooth	90	HGN12EGF1	—
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16EGF1	HGN16EGF5
HOT GALVANIZED							
1-1/4"	3d	.067"	.099"	Smooth	693	HGN3HGF1	—
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4HGF1	HGN4HGF5
2"	6d	.092"	.135"	Smooth	267	HGN6HGF1	HGN6HGF5
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8HGF1	HGN8HGF5
3"	10d	.113"	.155"	Smooth	109	HGN10HGF1	HGN10HGF5
3-1/4"	12d	.113"	.155"	Smooth	90	—	HGN12HGF5
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16HGF1	HGN16HGF5
OUTDOOR GALVANIZED							
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4OGF1	HGN4OGF5
2"	6d	.092"	.135"	Smooth	267	HGN6OGF1	HGN6OGF5
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8OGF1	HGN8OGF5
3"	10d	.113"	.155"	Smooth	109	HGN10OGF1	HGN10OG5
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16OGF1	HGN16OGF5



Product availability varies by location.

Casing Nail

For attaching trim, window, and door casing.

- Similar to finish nails but with slightly larger head and heavier gauge for window frames and door jambs
- Deep countersunk head sinks into wood, aids with concealment
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
HOT GALVANIZED							
2-1/2"	8d	.113"	.155"	Smooth	133	HGN8HGCAS1	HGN8HGCAS5
3"	10d	.128"	.170"	Smooth	82	HGN10HGCAS1	HGN10HGCAS5
3-1/4"	12d	.128"	.170"	Smooth	74	HGN12HGCAS1	HGN12HGCAS5
3-1/2"	16d	.135"	.177"	Smooth	71	HGN16HGCAS1	HGN16HGCAS5
3-1/2"	16d	.135"	.177"	Spiral	71	HGN16HGSTCAS1	HGN16HGSTCAS5
OUTDOOR GALVANIZED							
2-1/2"	8d	.113"	.155"	Smooth	147	HGN8OGCAS1	HGN8OGCAS5
3"	10d	.128"	.170"	Smooth	96	HGN10OGCAS1	HGN10OGCAS5
3-1/4"	12d	.128"	.170"	Smooth	88	HGN12OGCAS1	HGN12OGCAS5
3-1/2"	16d	.135"	.177"	Smooth	74	HGN16OGCAS1	HGN16OGCAS5



Product availability varies by location.

Box Nail

For light-duty general construction, carpentry, and box making.

- Relatively thinner shank and sharp point minimize splitting in wood
- Smaller shank and head than common nails of the same length
- Flat head sits flush against surface
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED

BRT
BRIGHT



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
HOT GALVANIZED								
1-1/4"	3d	—	—	Smooth	478	HGN3HGBX1	—	—
1-1/2"	4d	.080"	.219"	Smooth	374	HGN4HGBX1	HGN4HGBX5	—
1-3/4"	5d	.080"	.219"	Smooth	324	HGN5HGBX1	HGN5HGBX5	HGN5HGBXBK
2"	6d	.099"	.266"	Smooth	207	HGN6HGBX1	HGN6HGBX5	—
2-1/4"	7d	.099"	.266"	Smooth	184	HGN7HGBX1	HGN7HGBX5	HGN7HGBXBK
2-1/2"	8d	.113"	.297"	Smooth	125	HGN8HGBX1	HGN8HGBX5	HGN8HGBXBK
3"	10d	.128"	.312"	Smooth	85	HGN10HGBX1	HGN10HGBX5	HGN10HGBXBK
3-1/4"	12d	.128"	.312"	Smooth	77	HGN12HGBX1	HGN12HGBX5	HGN12HGBXBK
3-1/2"	16d	.135"	.344"	Smooth	67	HGN16HGBX1	HGN16HGBX5	HGN16HGBXBK
4"	20d	.148"	.375"	Smooth	49	HGN20HGBX1	HGN20HGBX5	HGN20HGBXBK
OUTDOOR GALVANIZED								
1-1/4"	3d	.076"	.219"	Smooth	478	HGN3OGBX1	HGN3OGBX5	—
1-1/2"	4d	.080"	.219"	Smooth	374	HGN4OGBX1	HGN4OGBX5	—
1-3/4"	5d	.080"	.219"	Smooth	324	HGN5OGBX1	HGN5OGBX5	—
2"	6d	.099"	.266"	Smooth	207	HGN6OGBX1	HGN6OGBX5	—
2-1/4"	7d	.099"	.266"	Smooth	184	HGN7OGBX1	HGN7OGBX5	HGN7OGBXBK
2-1/2"	8d	.113"	.297"	Smooth	125	HGN8OGBX1	HGN8OGBX5	HGN8OGBXBK
3"	10d	.128"	.312"	Smooth	85	HGN10OGBX1	HGN10OGBX5	—
3-1/4"	12d	.128"	.312"	Smooth	77	HGN12OGBX1	HGN12OGBX5	—
3-1/2"	16d	.135"	.344"	Smooth	67	HGN16OGBX1	HGN16OGBX5	—
4"	20d	.148"	.375"	Smooth	49	HGN20OGBX1	HGN20OGBX5	—



Product availability varies by location.

Common Nail

For heavy-duty general construction and framing.

- Most versatile and popular style of nail
- Heavier shank provides greater resistance to bending
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes

EG
ELECTRO
GALVANIZED

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED

BRT
BRIGHT

VC
VINYL
COATED



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
ELECTRO GALVANIZED								
2-1/2"	8d	.131"	.281"	Smooth	104	—	HGN8EGC5	—
3-1/4"	12d	.148"	.312"	Smooth	—	—	—	HGN12EGC
3-1/2"	16d	.162"	.344"	Smooth	47	—	HGN16EGC	—
HOT GALVANIZED								
1-1/2"	4d	—	—	Smooth	290	HGN4HGC1	HGN4HGC5	—
2"	6d	.113"	.250"	Smooth	167	HGN6HGC1	HGN6HGC5	HGN6HGCBK
2-1/4"	7d	.113"	.266"	Smooth	141	HGN7HGC1	HGN7HGC5	—
2-1/2"	8d	.131"	.266"	Smooth	104	HGN8HGC1	HGN8HGC5	HGN8HGCBK
3"	10d	.148"	.312"	Smooth	67	HGN10HGC1	HGN10HGC5	HGN10HGCBK
3-1/4"	12d	.148"	.312"	Smooth	63	HGN12HGC1	HGN12HGC5	HGN12HGCBK
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16HGC1	HGN16HGC5	HGN16HGCBK
4"	20d	.192"	.406"	Smooth	29	HGN20HGC1	HGN20HGC5	HGN20HGCBK
4-1/2"	30d	—	—	Smooth	110	—	HGN30HGC5	—
5"	40d	.226"	.469"	Smooth	80	—	HGN40HGC5	—
5-1/2"	50d	—	v	Smooth	65	—	—	HGN40HGC
6"	60d	.262"	.531"	Smooth	50	—	HGN60HGC5	—
OUTDOOR GALVANIZED								
2"	6d	.113"	.250"	Smooth	167	HGN6OGC1	HGN6OGC5	—
2-1/2"	8d	.131"	.281"	Smooth	104	HGN8OGC1	HGN8OGC5	—
3"	10d	.148"	.312"	Smooth	67	HGN10OGC1	HGN10OGC5	—
3-1/4"	12d	.148"	.312"	Smooth	63	HGN12OGC1	HGN12OGC5	HGN12OGCBK
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16OGC1	HGN16OGC5	—
4"	20d	.192"	.406"	Smooth	29	HGN20OGC1	HGN20OGC5	—
4-1/2"	30d	—	—	Smooth	22	—	HGN30OGC5	—
5"	40d	—	—	Smooth	16	—	HGN40OGC5	—
6"	60d	.262"	.531"	Smooth	10	—	HGN60OGC5	—
2"	6d	—	—	Ring	—	—	—	HGN6OGRSC
3-1/4"	12d	—	—	Ring	—	—	—	HGN12OGRSC
3-1/2"	16d	—	—	Ring	—	—	—	HGN16OGRSC
4"	20d	—	—	Ring	—	—	—	HGN20OGRSC



Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Joist Hanger Nail

For attaching joist hangers to wood ledgers, headers and beams.

- Heavy gauge allows more surface contact and greater holding power
- Flat head seats flush against surface
- Diamond point

Available Finishes



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
HOT GALVANIZED								
2-1/2"	8	.313"	Smooth	62	HGN2128HGJH1	HGN2128HGJH5	—	—
1-1/4"	9	.313"	Smooth	149	HGN1149HGJH1	HGN1149HGJH5	—	HGN1149HGJH
1-1/2"	9	.281"	Smooth	125	HGN1129HGJH1	HGN1129HGJH5	HGN1129HGJBK	HGN1129HGJH
1-1/4"	10	—	Smooth	194	HGN11410HGJH1			
1-1/2"	10	.281"	Smooth	165	HGN11210HGJH1	HGN11210HGJH5	HGN11210HGJBK	HGN11210HGJH
1-1/4"	11	.281"	Smooth	206	HGN11411HGJH1	HGN11411HGJH5	—	—
OUTDOOR GALVANIZED								
2-1/2"	8	—	Smooth	62	HGN2128OGJH1	HGN2128OGJH5	—	—
1-1/2"	9	.313"	Smooth	125	HGN1129OGJH1	HGN1129OGJH5	—	HGN1129OGJH
1-1/4"	10	.281"	Smooth	194	HGN11410OGJH1	—	—	—
1-1/2"	10	.281"	Smooth	165	HGN11210OGJH1	HGN11210OGJH5	—	HGN11210OGJH



Product availability varies by location.

Spike

For securing timbers and other similar landscaping materials.

- Checkered head to reduce hammer slipping
- Flat, countersunk head
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes



Size	Shank	Approx. count / lb.	5 lb. Box 5 / shipper	50 lb. Box
HOT GALVANIZED				
10"	Smooth	3	HGN10HGSPK5	HGN10HGSPK
12"	Smooth	2	HGN12HGSPK5	HGN12HGSPK
OUTDOOR GALVANIZED				
8"	Smooth	4	—	HGN8OGSPK
10"	Smooth	3	—	HGN10OGSPK
12"	Smooth	2	—	HGN12OGSPK



Timber Tie

For securing timbers and other similar landscaping materials.

- Flat head sits flush against surface
- Diamond point

Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
HOT GALVANIZED							
6"	60d	.1205"	.4375"	Spiral	10	HGN60HGTT5	HGN60HGTTBK
OUTDOOR GALVANIZED							
6"	60d	.1205"	.4375"	Spiral	10	HGN60OGTT5	—

Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS


COLLATED FASTENERS

Cut Masonry Nail

For attaching furring strips and other materials to cinder block, mortar joints, fresh concrete and brick walls.

- Tempered hardened steel for harder, less brittle nail
- Blunt point and tapered shank minimize splitting in wood
- Flat, rectangular head

Available Finishes

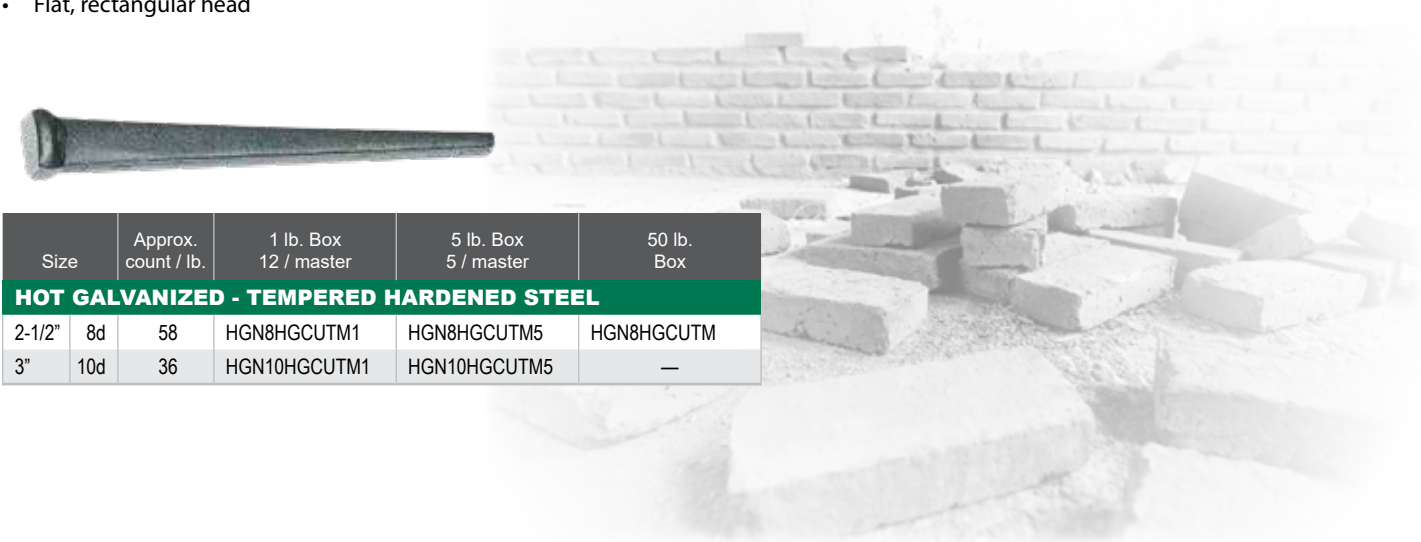


Size	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
HOT GALVANIZED - TEMPERED HARDENED STEEL				
2-1/2"	8d	58	HGN8HGCUTM1	HGN8HGCUTM5
3"	10d	36	HGN10HGCUTM1	HGN10HGCUTM5

Masonry Stub Nail

For applications where a smooth masonry style nail is required.

- Tempered hardened steel for harder, less brittle nail
- Larger head compared to standard masonry nails
- Smooth shank
- Diamond point

Available Finish

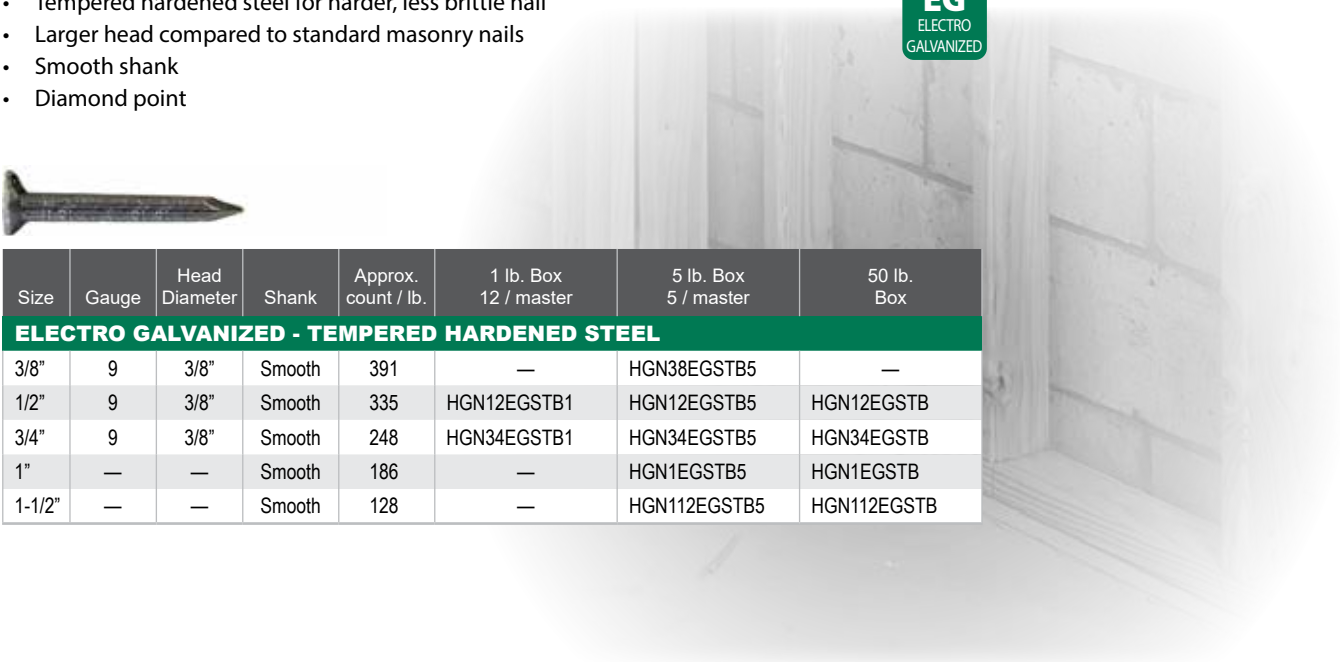


Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
ELECTRO GALVANIZED - TEMPERED HARDENED STEEL							
3/8"	9	3/8"	Smooth	391	—	HGN38EGSTB5	—
1/2"	9	3/8"	Smooth	335	HGN12EGSTB1	HGN12EGSTB5	HGN12EGSTB
3/4"	9	3/8"	Smooth	248	HGN34EGSTB1	HGN34EGSTB5	HGN34EGSTB
1"	—	—	Smooth	186	—	HGN1EGSTB5	HGN1EGSTB
1-1/2"	—	—	Smooth	128	—	HGN112EGSTB5	HGN112EGSTB

Pole Barn Nail

For attaching wall framing lumber to pole barn posts.

- Tempered hardened steel for harder, less brittle nail
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes

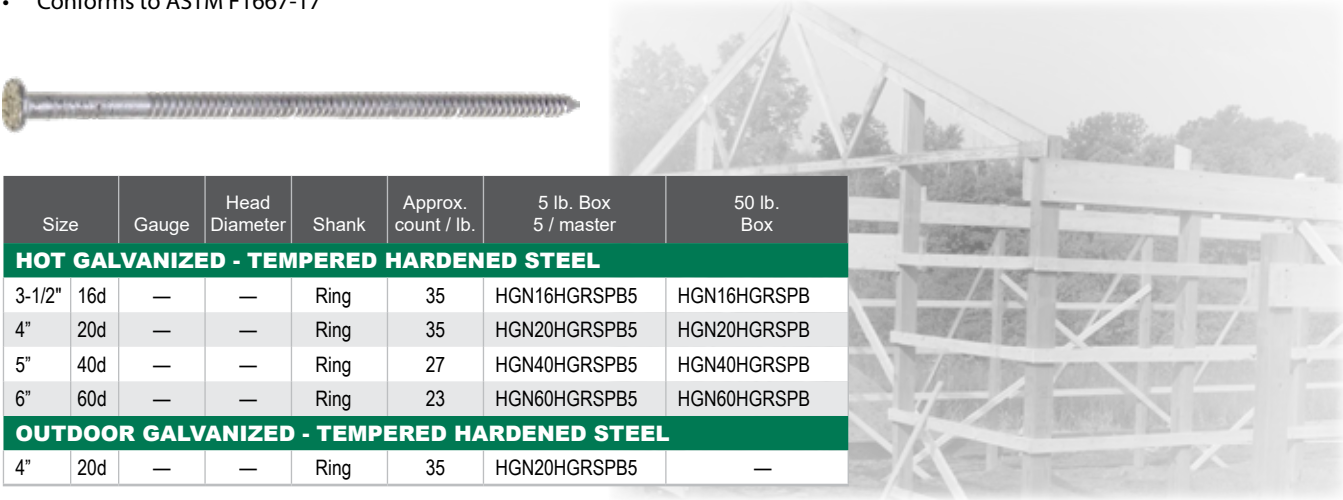

Size	Gauge	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	50 lb. Box
HOT GALVANIZED - TEMPERED HARDENED STEEL						
3-1/2"	16d	—	Ring	35	HGN16HGRSPB5	HGN16HGRSPB
4"	20d	—	Ring	35	HGN20HGRSPB5	HGN20HGRSPB
5"	40d	—	Ring	27	HGN40HGRSPB5	HGN40HGRSPB
6"	60d	—	Ring	23	HGN60HGRSPB5	HGN60HGRSPB
OUTDOOR GALVANIZED - TEMPERED HARDENED STEEL						
4"	20d	—	Ring	35	HGN20HGRSPB5	—

Fine Nail

For use with thin pieces of wood.

- Smooth, slender nail to minimize splitting narrow strips of wood
- Smooth, flat head
- Diamond point

Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
ELECTRO GALVANIZED							
1-1/8"	3d	.062"	.156"	Smooth	757	HGN3EGFINE1	HGN3EGFINE5 HGN3EGFINE

Lobster Pot Nail

For construction and repair of lobster crates.

- Smooth, slender nail to minimize splitting narrow strips of wood
- Smooth, flat head
- Diamond point

Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master
HOT GALVANIZED					
1-1/8"	3d	.062"	.156"	Smooth	757 HGN3HGLOBPOT1

Roofing Nail

For attaching roofing felt, insulation board, or asphalt shingles.

- Electro galvanized also used for hanging vinyl siding
- Large, flat head and heavy gauge for greater holding power
- Diamond point
- Conforms to ASTM F1667-17

Available Finishes



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
ELECTRO GALVANIZED									
1/2"	—	—	—	Smooth	375	HGN12EGRF1	—	—	—
3/4"	11	.120"	.375" - .394"	Smooth	323	HGN34EGRF1	HGN34EGRF5	—	—
7/8"	11	.120"	.375" - .394"	Smooth	300	HGN78EGRF1	HGN78EGRF5	HGN78EGRFBK	HGN78EGRF
1"	11	.120"	.281" - .394"	Smooth	261	HGN1EGRF1	HGN1EGRF5	HGN1EGRFBK	HGN1EGRF
1-1/4"	11	.120"	.312" - .394"	Smooth	209	HGN114EGRF1	HGN114EGRF5	HGN114EGRFBK	HGN114EGRF
1-1/2"	11	.120"	.375" - .394"	Smooth	194	HGN112EGRF1	HGN112EGRF5	HGN112EGRFBK	HGN112EGRF
1-3/4"	11	.120"	.375" - .394"	Smooth	155	HGN134EGRF1	HGN134EGRF5	HGN134EGRFBK	HGN134EGRF
2"	11	.120"	.375" - .394"	Smooth	136	HGN2EGRF1	HGN2EGRF5	HGN2EGRFBK	HGN2EGRF
2-1/2"	11	.120"	.375" - .394"	Smooth	109	HGN212EGRF1	HGN212EGRF5	HGN212EGRFBK	HGN212EGRF
3"	11	.120"	.375" - .394"	Smooth	92	HGN3EGRF1	HGN3EGRF5	HGN3EGRFBK	HGN3EGRF
7/8"	—	—	—	Smooth	—	—	HGN78EGRSRF5	—	—
1"	—	—	—	Smooth	—	—	HGN1EGRSRF5	—	—
1-1/4"	—	—	—	Smooth	—	—	HGN114EGRSRF5	—	HGN114EGRSRF
1-1/2"	—	—	—	Smooth	—	—	HGN112EGRSRF5	—	—
HOT GALVANIZED									
3/4"	11	.120"	.375" - .394"	Smooth	315	HGN34HGRF1	HGN34HGRF5	HGN34HGRFBK	—
7/8"	11	.120"	.375" - .394"	Smooth	288	HGN78HGRF1	HGN78HGRF5	—	HGN78HGRF
1"	11	.120"	.375" - .394"	Smooth	254	HGN1HGRF1	HGN1HGRF5	HGN1HGRFBK	HGN1HGRF
1-1/4"	11	.120"	.375" - .394"	Smooth	196	HGN114HGRF1	HGN114HGRF5	HGN114HGRFBK	HGN114HGRF
1-1/2"	11	.120"	.375" - .394"	Smooth	163	HGN112HGRF1	HGN112HGRF5	HGN112HGRFBK	HGN112HGRF
1-3/4"	11	.120"	.375" - .394"	Smooth	148	HGN134HGRF1	HGN134HGRF5	HGN134HGRFBK	HGN134HGRF
2"	11	.120"	.375" - .394"	Smooth	120	HGN2HGRF1	HGN2HGRF5	HGN2HGRFBK	HGN2HGRF
2-1/2"	11	.120"	.375" - .394"	Smooth	106	HGN212HGRF1	HGN212HGRF5	HGN212HGRFBK	HGN212HGRF
3"	11	.120"	.375" - .394"	Smooth	90	HGN3HGRF1	HGN3HGRF5	HGN3HGRFBK	HGN3HGRF




Product availability varies by location.

Plastic Cap Nail

For attaching tar paper, felt paper, synthetic underlayment, housewrap, and insulation foam board.

- Plastic cap helps to reduce pull-through and tears in building materials and other substrates
- Designed to distribute maximum holding power to the perimeter of the cap
- Diamond point
- Complies to ASTM F1667-17

Available Finish



Size	Shank Diameter	Cap Diameter	Head	Shank	Approx. count / lb.	1 lb. Box 5 / master	Bucket	Bucket Quantity	2,000 piece Box
ELECTRO GALVANIZED									
3/4"	.106"	1"	Round	Ring	362	—	HGN34PCBK	3,000	HGN34PC
7/8"	.106"	1"	Round	Ring	339	HGN78PC1	HGN78PCBK	3,000	HGN78PC
1"	.106"	1"	Round	Ring	323	HGN1PC1	HGN1PCBK	3,000	HGN1PC
1-1/4"	.106"	1"	Round	Ring	269	HGN114PC1	HGN114PCBK	2,500	HGN114PC
1-1/2"	.106"	1"	Round	Ring	185	HGN112PC1	HGN112PCBK	2,500	HGN112PC
1-3/4"	.106"	1"	Round	Ring	168	HGN134PC1	HGN134PCBK	2,000	—
2"	.106"	1"	Round	Ring	153	HGN2PC1	HGN2PCBK	2,000	—
2-1/2"	.106"	1"	Round	Ring	133	HGN212PC1	HGN212PCBK	2,000	HGN212PC
3"	.106"	1"	Round	Ring	117	HGN3PC1	HGN3PCBK	1,500	—




Product availability varies by location.

Metal Cap Nail

For attaching tar paper, felt paper, synthetic underlayment, housewrap, insulation foam board, and built-up and modified roofing.

- Oversized head, ringed shank provide enhanced holding power
- Diamond point
- Complies to ASTM F1667-17

Available Finish



Size	Gauge	Head	Shank	Approx. count / lb.	3 lb. Box 5 / master	25 lb. Box	50 lb. Box
ELECTRO GALVANIZED							
7/8"	—	Round	Ring	112	HGN78MRC3	HGN78MRC25	HGN78MRC
1"	12	Round	Ring	107	HGN1MRC3	HGN1MRC25	HGN1MRC
1-1/4"	12	Round	Ring	100	HGN114MRC3	HGN114MRC25	—
1-1/2"	12	Round	Ring	84	HGN112MRC3	HGN112MRC25	HGN112MRC
1-3/4"	12	Round	Ring	79	HGN134MRC3	HGN134MRC25	HGN134MRC
2"	12	Round	Ring	74	HGN2MRC3	HGN2MRC25	HGN2MRC
2-1/2"	11	Round	Ring	57	HGN212MRC3	HGN212MRC25	HGN212MRC
3"	11	Round	Ring	60	HGN3MRC3	HGN3MRC25	HGN3MRC
4"	—	Round	Ring	—	—	HGN4MRC25	—
5"	—	Round	Ring	—	—	HGN5MRC25	—
7/8"	12	Square	Ring	88	HGN78MSQC3	HGN78MSQC25	HGN78MSQC
1"	12	Square	Ring	85	HGN1MSQC3	HGN1MSQC25	HGN1MSQC
1-1/4"	12	Square	Ring	81	HGN114MSQC3	HGN114MSQC25	HGN114MSQC

Tin Caps

For use with fasteners for increased bearing surface with materials such as felt paper or sheets of foam board-type insulation products.



Approximate Size		Thickness	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
Medium	2"	0.200 mm	152	HGNMEDITIN1	HGNMEDITIN5	HGNMEDITIN
Large	2-1/2"	0.200 mm	95	HGNLARGETIN1	HGNLARGETIN5	HGNLARGETIN

Product availability varies by location.

Aluminum Roofing Nail with Neoprene Washer

For attaching corrugated metal and fiberglass panels.

- Neoprene-bonded washer creates a seal against the surface, prevents moisture from entering the hole
- Ring shank for enhanced holding power
- Diamond point
- Manufactured from the highest quality 5056 aluminum
- High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails

Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 5 / master
ALUMINUM					
1-3/4"	.134"	7/16"	Ring	368	HGN134ALNEO1

Roofing Nail with Neoprene Washer

For attaching corrugated metal and fiberglass panels.

- Neoprene-bonded washer creates a seal against the surface, prevents moisture from entering the hole
- Ring shank for enhanced holding power
- Diamond point

Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
ELECTRO GALVANIZED							
1-1/2"	.135"	.375"	Ring	118	HGN112EGRNEO1	HGN112EGRNEO5	HGN112EGRNEO
1-3/4"	.135"	.375"	Ring	107	HGN134EGRNEO1	HGN134EGRNEO5	HGN134EGRNEO
2"	.135"	.375"	Ring	96	HGN2EGRNEO1	HGN2EGRNEO5	—
2-1/2"	—	—	Ring	80	—	HGN212EGRNEO5	—
HOT GALVANIZED							
1-3/4"	.135"	.375"	Ring	107	HGN134HGRNEO1	HGN134HGRNEO5	HGN134HGRNEO

Product availability varies by location.

Shake Siding Nail

For installing woven shingle corners and similar applications with smaller pieces of wood and minimized nail visibility.

- Thin shank and blunt point reduce splitting in wood.
- Smaller, smooth head for inconspicuous finish.

Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
HOT GALVANIZED							
1-3/4"	.080"	.156"	Ring	404	HGN134HGRSSHK1	HGN134HGRSSHK5	HGN134HGRSSHK
2"	.080"	.156"	Ring	354	HGN2HGRSSHK1	HGN2HGRSSHK5	—
1-3/4"	.080"	.156"	Smooth	404	HGN134HGSHK1	HGN134HGSHK5	—

Shingle Nail

For attaching wood shingles.

- Larger head provides greater pull-through resistance
- Diamond point

Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
HOT GALVANIZED							
1-1/4"	.092"	.250"	Smooth	425	HGN114HGSHGL1	HGN114HGSHGL5	—
1-3/8"	.099"	.281"	Smooth	345	HGN138HGSHGL1	HGN138HGSHGL5	—
1-1/2"	.106"	.281"	Smooth	271	HGN112HGSHGL1	—	HGN112HGSHGL

Product availability varies by location.

Wood and Hardboard Siding Nail

For attaching wood and hardboard siding.

- Checkered head for paint adherence
- Stiffened shank for enhanced holding power
- Diamond point
- Conforms to ASTM F1575-17



Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	30 lb. Bucket
HOT GALVANIZED								
2"	6d	.113"	.219"	Smooth	173	HGN6HGHBS1	HGN6HGHBS5	—
2-1/4"	7d	.113"	.219"	Smooth	156	HGN7HGHBS1	HGN7HGHBS5	—
2-1/2"	8d	.113"	.219"	Smooth	140	HGN8HGHBS1	HGN8HGHBS5	—
3"	10d	.113"	.219"	Smooth	108	HGN10HGHBS1	HGN10HGHBS5	—
3-1/2"	16d	.113"	.219"	Smooth	80	HGN16HGHBS1	HGN16HGHBS5	HGN16HGHBS
2"	6d	.113"	.219"	Spiral	173	HGN6HGSTHBS1	HGN6HGSTHBS5	—
2-1/4"	7d	.113"	.219"	Spiral	156	HGN7HGSTHBS1	HGN7HGSTHBS5	—
2-1/2"	8d	.113"	.219"	Spiral	140	HGN8HGSTHBS1	HGN8HGSTHBS5	HGN8HGSTHBSBK
3"	10d	.113"	.219"	Spiral	108	HGN10HGSTHBS1	HGN10HGSTHBS5	—
3-1/4"	12d	—	—	Spiral	108	HGN12HGSTHBS1	—	—
3-1/2"	16d	.113"	.219"	Spiral	80	HGN16HGSTHBS1	HGN16HGSTHBS5	—
OUTDOOR GALVANIZED								
2"	6d	.113"	.219"	Smooth	173	HGN6OGHBS1	HGN6OGHBS5	—
2-1/4"	7d	.113"	.219"	Smooth	156	HGN7OGHBS1	—	—
2-1/2"	8d	.113"	.219"	Smooth	140	HGN8OGHBS1	HGN8OGHBS5	—
2-1/2"	8d	.113"	.219"	Spiral	140	HGN8OGSTHBS1	HGN8OGSTHBS5	—

No-Split Wood Siding Nail

For use with split-prone woods.

- Thin, ringed shank and blunt point minimize splitting in wood
- Diamond point
- Conforms to ASTM F1575-17



Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
HOT GALVANIZED						
1-3/4"	5d	.113"	.219"	Ring	323	HGN5HGRSSPS1
2"	6d	.113"	.219"	Ring	283	HGN6HGRSSPS1
2-1/2"	8d	.113"	.219"	Ring	189	HGN8HGRSSPS1
3"	10d	—	—	Ring	153	HGN8HGRSSPS1



Product availability varies by location.

Aluminum Siding Nail

For attaching aluminum, vinyl, or steel siding.

- Large, flat head for greater holding power
- Diamond point
- Manufactured from the highest quality 5056 aluminum
- High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails



Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 5 / master	12 lb. Bucket
ALUMINUM						
1-1/2"	4d	.120"	3/8"	115	HGN112ALVS1	HGN112ALVSBK
2"	6d	.120"	3/8"	83	HGN2ALVS1	—



Aluminum Trim Nail

For attaching redwood and cedar soffit, fascia, and aluminum trim coil.

- Diamond point
- Manufactured from the highest quality 5056 aluminum
- High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails
- Available painted with premium baked enamel paints.



Available Finish



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	Color	1 lb. Box 5 / master
ALUMINUM							
1-1/4"	3d	13	.099"	3/16"	Smooth	1,090	Brown
1-1/4"	3d	13	.099"	3/16"	Smooth	1,090	White



Product availability varies by location.

Copper Roofing Nail

For installation of slate, tile and copper roofing.

- Also known as copper slating nails
- Shank diameter fits pre-formed tile and slate holes
- Larger head covers tile holes
- Top quality CDA-110 copper
- Conforms to ASTM B49



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
COPPER							
1"	11	7/16"	Smooth	240	HGN1CPRRF1	HGN1CPRRF5	—
1-1/4"	11	7/16"	Smooth	148	HGN114CPRRF1	HGN114CPRRF5	—
1-1/2"	11	7/16"	Smooth	123	HGN112CPRRF1	HGN112CPRRF5	HGN112CPRRF
2"	11	7/16"	Smooth	110	—	HGN2CPRRF5	—

Tile Roofing Nail

For securing roofing tiles.

- Oversized head provides expanded holding power to hold down roofing tiles
- Long shank inserts through holes pre-drilled in tile
- Diamond point



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	50 lb. Box
ELECTRO GALVANIZED						
4"	8	.468"	Smooth	250	—	HGN4EGTLRF
5"	8	.468"	Smooth	190	—	HGN5EGTLRF
5-1/2"	8	.468"	Smooth	180	HGN512EGTLRF5	HGN5EGTLRF
6"	8	.468"	Smooth	160	HGN6EGTLRF5	HGN6EGTLRF

Available Finish



Available Finish



Furring Nail with wad

For attaching stucco wire mesh to the exterior wall for application of stucco mud.

- For use with flat wire lath that is not furred (wadding is not pre-attached)
- Spacer on the nail creates a gap between the wire lath and the wall for space for the cement
- Smooth, flat head
- Diamond point



with wad

Size	Shank	Approx. count.	300 pc. Box 5 / master	5,000 pc. Box
ELECTRO GALVANIZED				
1-1/2"	Smooth with wad	300	HGN112FURWW300	HGN112FURWW5M
1-3/4"	Smooth with wad	300	HGN134FURWW300	HGN134FURWW5M

Available Finish



CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Drywall Nail

For attaching sheets of drywall to wood studs.

- Thin, broad head sits flush against surface
- Ring shank for greater holding power
- Long diamond point reduces tearing of drywall paper
- Conforms to ASTM C514



Available Finishes

BRT
BRIGHT

BL
BLUED

VC
VINYL
COATED



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT							
1-1/4"	.099"	11/32"	Ring	339	HGN114RSDWN1	HGN114RSDWN5	HGN114RSDWN
1-3/8"	.099"	11/32"	Ring	320	HGN138RSDWN1	HGN138RSDWN5	HGN138RSDWN
1-1/2"	—	—	Ring	288	HGN112RSDWN1	—	—
1-5/8"	.099"	11/32"	Ring	260	HGN158RSDWN1	HGN158RSDWN5	HGN158RSDWN
2"	—	—	Ring	224	HGN2RSDWN5	—	—
BLUED							
1-3/8"	.099"	11/32"	Ring	316	HGN138BLRSDW1	HGN138BLRSDW5	—
1-5/8"	.099"	11/32"	Ring	295	HGN158BLRSDW1	HGN158BLRSDW5	—
VINYL COATED							
1-3/8"	—	—	Smooth	—	HGN112CDWN1	HGN112CDWN5	—
1-5/8"	—	—	Smooth	—	HGN134CDWN1	HGN134CDWN5	—
1-5/8"	—	—	Smooth	—	—	HGN2CDWN5	—

Drywall Nail - Cupped Head

For attaching sheets of drywall to wood studs.

- Cupped head sinks into surface, accepts joint compound
- Slightly heavier shank than standard drywall nails
- Smooth shank and long diamond point reduces tearing of drywall paper
- Phosphate coating reduces friction, binds with joint compounds and paint
- Conforms to ASTM C514



Available Finish

PC
PHOSPHATE
COATED



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
PHOSPHATE COATED							
1-3/8"	.106"	11/32"	Smooth	335	HGN138PCCHDW1	HGN138PCCHDW5	HGN138PCCHDW
1-5/8"	.106"	11/32"	Smooth	315	HGN158PCCHDW1	HGN158PCCHDW5	HGN158PCCHDW
1-7/8"	.106"	11/32"	Smooth	264	HGN178PCCHDW1	HGN178PCCHDW5	HGN178PCCHDW
2-1/8"	.106"	11/32"	Smooth	230	HGN218PCCHDW1	HGN218PCCHDW5	HGN218PCCHDW
2-3/8"	.106"	11/32"	Smooth	148	—	HGN238PCCHDW5	—

Product availability varies by location.

Lath Nail

For attaching wood lath strips to wood studs.

- Smooth, slender nail to minimize splitting narrow strips of lath
- Heat sterilization process creates blue oxide film, more resistant to corrosion from wet plaster
- Smooth, flat head
- Diamond point



Available Finish

BL
BLUED

Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	50 lb. Box
BLUED						
1-1/8"	—	—	Smooth	984	HGN118BLLTH5	—
1-1/4"	—	—	Smooth	365	HGN114BLLTH5	HGN114BLLTH



Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

HUTTIG-GUARD™ Stainless Steel

Recommended for use **outdoors**, with **treated lumber**, and in other **high-corrosive environments**.

Limited Lifetime Fastener Warranty



305 STAINLESS STEEL
recommended for use with:

- TREATED LUMBER
- CEDAR
- REDWOOD

316 STAINLESS STEEL
recommended for use with:

- TREATED LUMBER
- CEDAR
- REDWOOD
- MARINE



STAINLESS STEEL NAILS

GENERAL CONSTRUCTION NAILS

APPLICATIONS

- Decks
- Docks
- Fences
- Framing
- General Construction
- Joists
- Trim - Wood, PVC, or Composite

STYLES

- Box Nails
- Common Nails
- Deck Nails
- Finish Nails
- Joist Hanger Nails
- Trim Nails

ROOFING/SIDING NAILS

APPLICATIONS

- Cedar Shake
- Fascia, Soffit, Trim - Aluminum, Vinyl, or Composite
- Roofing
- Wood Siding

STYLES

- No-Split Wood Siding Nails
- Roofing Nails
- Shake Nails
- Trim Nails

Construction Fasteners

HUTTIG-GUARD™ STAINLESS STEEL NAILS

Stainless Steel - Fence/Deck	40
Stainless Steel - Finish/Trim	41
Stainless Steel - Framing	42
Stainless Steel - Roofing /Siding	43
Stainless Steel - Siding	44
Stainless Steel - Trim	45

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Stainless Steel Deck Nail

For deck, patio, fence, and other outdoor construction.

- Flat head seats flush against surface
- Ring shank for use in softer woods and where vibration may be a factor
- Spiral shank for use with harder woods and near board ends to minimize splitting
- Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details.



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
304 STAINLESS STEEL								
2"	6d	—	—	—	Ring	152	HGG6SSRSDK1	—
2-1/2"	8d	10	.134"	9/32"	Ring	122	HGG8SSRSDK1	HGG8SSRSDKBK
3"	10d	9	.148"	5/16"	Ring	84	HGG10SSRSDK1	HGG10SSRSDK5
3-1/2"	16d	8	.165"	11/32"	Ring	58	HGG16SSRSDK1	HGG16SSRSDK5
3"	10d	—	—	—	Spiral	84	HGG10SSSTDK1	—
316 STAINLESS STEEL								
2-1/2"	8d	—	—	—	Ring	122	HGG8SSRSDK61	HGG8SSRSDK65
3-1/4"	12d	—	—	—	Ring	77	HGG12SSRSDK61	—
3-1/2"	16d	—	—	—	Ring	58	HGG16SSRSDK61	HGG16SSRSDK65



Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Stainless Steel Finish Nail

For use with exterior wood, PVC, and composite trim and finish work

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Cupped head for ease of concealment
- Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details.



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master
304 STAINLESS STEEL						
1-3/4"	5d	13	.072"	.095"	Smooth	279
2-1/2"	8d	12	.135"	.109"	Smooth	163



Product availability varies by location.

Stainless Steel Common Nail

For heavy-duty general construction and framing.

- Most versatile and popular style of nail
- Heavier shank provides greater resistance to bending
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details.



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
304 STAINLESS STEEL								
2-1/2"	8d	10	.134"	9/32"	Ring	94	HGG8SSRSC1	—
3"	10d	9	.148"	5/16"	Ring	67	HGG10SSRSC1	—
3-1/2"	16d	8	.165"	11/32"	Ring	44	HGG16SSRSC1	HGG16SSRSC5
316 STAINLESS STEEL								
2-1/2"	8d	10	.134"	9/32"	Ring	122	—	HGG8SSRSC6BK
3"	10d	9	.148"	5/16"	Ring	77	—	HGG10SSRSC6BK
3-1/2"	16d	8	.165"	11/32"	Ring	58	HGG16SSRSC65	HGG16SSRSC6BK

Stainless Steel Joist Hanger Nail

For attaching joist hangers to wood ledgers, headers and beams.

- Heavy gauge allows more surface contact and greater holding power
- Flat head seats flush against surface
- Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details.



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
304 STAINLESS STEEL							
1-1/2"	4d	10	.134"	5/16"	Smooth	147	HGG11210SSJH1
316 STAINLESS STEEL							
1-1/2"	4d	9	.134"	5/16"	Smooth	125	HGG1129SSJH61

Product availability varies by location.

Stainless Steel Roofing Nail

For attaching asphalt, dimensional, or wood shingles.

- Large, flat head and larger shank diameter for greater holding power
- Ring shank for enhanced holding power
- Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details.



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
304 STAINLESS STEEL								
7/8"	10	.134"	3/8"	Smooth	242	HGG78SSRF1	—	—
7/8"	10	.134"	3/8"	Ring	242	HGG78SSRRF1	—	—
1-1/4"	10	.134"	3/8"	Ring	171	HGG114SSRRF1	HGG114SSRRF5	HGG114SSRRF
1-1/2"	10	.134"	3/8"	Ring	149	HGG112SSRRF1	HGG112SSRRF5	HGG112SSRRF
1-3/4"	10	.134"	3/8"	Ring	131	—	HGG134SSRRF5	HGG134SSRRF
2"	10	.134"	3/8"	Ring	117	HGG2SSRRF1	HGG2SSRRF5	HGG2SSRRF

Stainless Steel Shake Siding Nail

For installing woven shingle corners and similar applications with smaller pieces of wood and minimized nail visibility.

- Thin ring shank and blunt point reduce splitting in wood.
- Smaller, smooth head for inconspicuous finish.
- Diamond point
- Limited lifetime fastener warranty. See www.huttig.com/warranty for complete details.



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
304 STAINLESS STEEL								
1-1/2"	4d	14	.083"	1/8"	Ring	402	HGG112SSRSSHK1	HGG112SSRSSHK5
1-3/4"	5d	14	.083"	1/8"	Ring	346	HGG134SSRSSHK1	HGG134SSRSSHK5
2"	6d	14	.083"	1/8"	Ring	310	HGG2SSRSSHK1	HGG2SSRSSHK5
316 STAINLESS STEEL								
1-1/2"	4d	14	.083"	1/8"	Ring	402	HGG112SSRSSHK61	HGG112SSRSSHK65
2"	6d	14	.083"	1/8"	Ring	310	—	HGG134SSSHK65

Product availability varies by location.

Stainless Steel No-Split Wood Siding Nail

For use with split-prone woods.

- Small, checkered head for low glare or paint adherence
- Thin, ringed shank and blunt point minimize splitting in wood
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details.



	Size	Gauge	Shank Diameter	Head Diameter	Shank	Color	Approx count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
304 STAINLESS STEEL										
1-1/4"	3d	14	.083"	.1562"	Ring	—	360	HGG3SSRSSPS1	HGG3SSRSSPS5	HGG4SSRSSPSBK
1-1/2"	4d	14	.083"	.1562"	Ring	—	413	HGG4SSRSSPS1	HGG4SSRSSPS5	—
1-3/4"	5d	14	.083"	.1712"	Ring	—	355	HGG5SSRSSPS1	HGG5SSRSSPS5	HGG5SSRSSPSBK
2"	6d	13	.095"	.1875"	Ring	—	242	HGG6SSRSSPS1	HGG6SSRSSPS5	HGG6SSRSSPSBK
2-1/4"	7d	—	—	—	Ring	—	220	HGG7SSRSSPS1	HGG7SSRSSPS5	HGG7SSRSSPSBK
2-1/2"	8d	13	.095"	.1875"	Ring	—	198	HGG8SSRSSPS1	HGG8SSRSSPS5	HGG8SSRSSPSBK
3"	10d	12	.109"	.2031"	Ring	—	120	HGG10SSRSSPS1	HGG10SSRSSPS5	HGG10SSRSSPSBK
3-1/4"	12d	—	—	—	Ring	—	110	HGG12SSRSSPS1	HGG12SSRSSPS5	—
3-1/2"	16d	10	.134"	.2188"	Ring	—	72	HGG16SSRSSPS1	HGG16SSRSSPS5	—
2"	6d	—	—	—	Ring	White	242	HGG6SSRSSPSWH1	---	—
2-1/2"	8d	—	—	—	Ring	White	198	HGG8SSRSSPSWH1	---	—
316 STAINLESS STEEL										
1-1/2"	4d	14	.083"	.1562"	Ring	—	413	HGG4SSRSSPS61	HGG4SSRSSPS65	—
1-3/4"	5d	14	.083"	.1712"	Ring	—	355	HGG5SSRSSPS61	HGG5SSRSSPS65	HGG5SSRSSPS6BK
2"	6d	13	.095"	.1875"	Ring	—	242	HGG6SSRSSPS61	HGG6SSRSSPS65	—
2-1/4"	7d	—	—	—	Ring	—	220	HGG7SSRSSPS61	HGG7SSRSSPS65	—
2-1/2"	8d	13	.095"	.1875"	Ring	—	198	HGG8SSRSSPS61	HGG8SSRSSPS65	—
3"	10d	—	—	—	Ring	—	120	HGG10SSRSSPS61	HGG10SSRSSPS65	—
3-1/4"	12d	—	—	—	Ring	—	110	HGG12SSRSSPS61	HGG12SSRSSPS65	—
3-1/2"	16d	10	.134"	.2188"	Ring	—	72	HGG16SSRSSPS61	HGG16SSRSSPS65	—



Product availability varies by location.

Stainless Steel Trim Nail

For attaching soffit, fascia, and other cedar, aluminum, vinyl, or composite exterior trim.

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Smaller, smooth head for inconspicuous finish
- Available painted with premium baked enamel paints
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details.



Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	Color	1 lb. Box 12 / master	
304 STAINLESS STEEL - PAINTED								
1-1/4"	3d	15	.072"	11/64	Smooth	637	Brown	HGG114SSTRBW1
1-1/4"	3d	15	.072"	11/64	Smooth	637	White	HGG114SSTRWH1



Product availability varies by location.

HUTTIG-GRIP™ & HUTTIG-GUARD™ WOOD SCREWS

Huttig delivers the most complete mix of wood screws designed specifically for interior or outdoor applications.

All Huttig wood screws are designed to provide superior penetration, grip and strength—all while reducing effort, head-pops, breaks and splitting.

HEAD

Huttig-Grip All Purpose and Huttig-Guard outdoor screws have flat heads with nibs, while others use bugle heads.

- Flat head -
 - designed for use with wood; bugle head is best for drywall applications, tucks drywall paper under the head
 - dramatically reduces head pops when driving fasteners into wood; bugle head intended to sink into softer materials, prone to breaking especially when used with harder woods
- Nibs help to “seat” the head into wood for flat, smooth installation surface
- **HUTTIG-GUARD Platinum Outdoor Screws feature a Double Countersink Flat head with Nibs** for ultimate seating in wood



FLAT HEAD WITH NIBS



DOUBLE COUNTERSINK FLAT HEAD WITH NIBS

DRIVE

Huttig-Grip All Purpose and Huttig-Guard screws have a star drive versus Phillips.

- Star drive is a “positive” drive; keeps driving tool in place, even with high torque
- 12-point contact with bit
- Eliminates head spin outs
- FREE star drive bit with all Huttig-Guard screws



STAR DRIVE

THREAD

Huttig-Grip All Purpose and Huttig-Guard wood screws have coarse, serrated thread.*

- Serrated threads reduce the torque needed to drive the screw without reducing holding power

*Huttig-Guard Stainless Steel screws are coarse thread.



COARSE SERRATED THREAD

KNURLED SHANK

- **HUTTIG-GUARD Platinum Outdoor Screws feature a knurled shank**; reams hole in board reducing drag on shank & driving tool for faster, easier penetration



KNURLED SHANK

POINT

Huttig-Grip All Purpose and Huttig-Guard screws have a Type 17 point versus standard sharp point.

- Type 17 point was originally designed for the hardwood wood-working industry
- “Drills” through wood; penetrates some of the hardest woods faster, eliminates splitting at board ends
- Quickly starts wood penetration without “walking”, also cuts wood fibers when driving for faster initial installation times

HUTTIG-GUARD Platinum Screws feature a Type 17 Long point for even faster, easier penetration

- Designed for use with thicker pieces of hardwood where more material will be displaced, fluting helps to move chips out of the hole



TYPE 17 POINT



TYPE 17 LONG POINT

GAUGE

Huttig-Grip all purpose and Huttig-Guard wood screws are made of heavy gauge wire.

- Superior holding power
- Eliminates head pops and screws breaking during drilling



Product availability varies by location.

Wood & Exterior Screws

HUTTIG-GRIP™ & HUTTIG-GUARD™

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

HUTTIG-GRIP™ Wood Screws

GENERAL
CONSTRUCTION

WOOD SCREWS

Indoors or environments where fastener will not be directly exposed to moisture or other potentially corrosive conditions. Limited or no resistance to corrosion.

APPLICATIONS

- Cabinets
- Shelving
- Most wood-to-wood applications

FINISH

YZ
YELLOW
ZINC



Product availability varies by location.

Wood & Exterior Screws

HUTTIG-GRIP™ WOOD SCREWS

Wood Screws	
■ All Purpose.....	52
■ General Construction	52



! WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

Fast. Easy. Reliable.

HUTTIG-GRIP™ DELIVERS



12-point star drive for better engagement



Countersinking flat head with nibs for fewer head pops and a smoother finish



Coarse serrated thread reduces torque needed to drive screw without reducing holding power



Type 17 point drills through wood, eliminates splits; fluting moves chips out of the hole



Yellow Zinc Plated for clean, shiny finished project

Huttig-Grip™ All-Purpose Screws from Huttig® provide superior penetration, grip and strength all while reducing effort, head-pops, breaks and splitting.

Designed specifically for use with wood, the drive, head, thread, and point all work together for faster, easier installation.

Plus, these screws are made from heavy-gauge wire, which means less breakage during installation and stronger, longer holding power.

Huttig-Grip All-Purpose Screws save time and reduce waste on the jobsite and for DIY projects.



HUTTIG-GRIP™
www.huttig-grip.com

YOUR COMPETITIVE EDGE

HUTTIG-GRIP™

WOOD-TO-WOOD

All Purpose Screw

For all wood-to-wood applications.

- 12-point star drive for better engagement, more torque
- Flat, countersink head with nibs for fewer head pops, smoother finish
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
YELLOW ZINC							
1" x 8	T-20 Star	278	HGS1YAP1	HGS1YAP5	—	—	—
1-1/4" x 8	T-20 Star	278	HGS114YAP1	HGS114YAP5	HGS114YAP25	HGS114YAP8M	8,000
1-5/8" x 8	T-20 Star	217	HGS158YAP1	HGS158YAP5	HGS158YAP25	HGS158YAP5M	5,000
2" x 8	T-20 Star	175	HGS2YAP1	HGS2YAP5	HGS2YAP25	HGS2YAP35M	3,500
2-1/2" x 9	T-25 Star	110	HGS212YAP1	HGS212YAP5	HGS212YAP25	HGS212YAP25M	2,500
3" x 9	T-25 Star	90	HGS3YAP1	HGS3YAP5	HGS3YAP25	HGS3YAP2M	2,000
3-1/2" x 10	T-25 Star	55	HGS312YAP1	HGS312YAP5	HGS312YAP25	HGS312YAP1M	1,000
4" x 10	T-25 Star	52	HGS4YAP1	HGS4YAP5	HGS4YAP25	HGS4YAP1M	1,000

General Purpose Screw

For non-load bearing wood-to-wood applications..

- Also for attaching sheets of drywall to wood studs.
- Bugle-shaped head countersinks into softer materials, compacts material beneath, for smooth finish.
- Sharp point, coarse thread for use with wood.



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 5 / master	Bulk Box	Box Quantity
YELLOW ZINC					
1-1/4" x 6	Sharp	278	—	HGS114CGSW8M	8,000
1-5/8" x 6	Sharp	217	—	HGS158CGSW5M	5,000
2" x 7	Sharp	175	—	HGS2CGSW35M	3,500
2-1/2" x 8	Sharp	110	—	HGS212CGSW25M	2,500
3" x 8	Sharp	90	—	HGS3CGSW1M	1,000
5" x 10	Sharp	40	HGS5CGSW1	HGS5CGSW500	500
6" x 10	Sharp	30	—	HGS6CGSW500	500

Available Finish



Available Finish



Product availability varies by location.

Product availability varies by location.

HUTTIG-GUARD™ Exterior Screws

Recommended for use with **wood, outside** and in more **corrosive environments**.

LIFETIME
PLATINUM
LIMITED WARRANTY

PLATINUM SCREWS LIMITED LIFETIME FASTENER WARRANTY

OUTDOOR SCREWS

APPLICATIONS

- Decks
- Fences
- Gazebos

TREATED LUMBER

DOUBLE COUNTERSINK FLAT HEAD WITH NIBS

STAR DRIVE

COARSE SERRATED THREAD

TYPE 17 LONG POINT

KNURLED SHANK

BRONZE

GREEN

TRIM SCREWS

APPLICATIONS

- Railings
- Trim

TREATED LUMBER

TRIM HEAD WITH NIBS

STAR DRIVE

COARSE SERRATED THREAD

TYPE 17 LONG POINT

KNURLED SHANK

BRONZE

GREEN

50 YEAR
PREMIUM
LIMITED WARRANTY

PREMIUM SCREWS LIMITED 50-YEAR FASTENER WARRANTY

OUTDOOR SCREWS

APPLICATIONS

- Decks
- Fences
- Gazebos

TREATED LUMBER

FLAT HEAD WITH NIBS

STAR DRIVE

COARSE SERRATED THREAD

TYPE 17 POINT

GREEN

TAN

BROWN

RED

COMPOSITE SCREWS

APPLICATIONS

- Composite Decking

COMPOSITE LUMBER

MUSHROOM HEAD

STAR DRIVE

TRIPLE THREAD

TYPE 17 POINT

DARK BROWN

REDWOOD

GRAY

TAN

15 YEAR
PROFESSIONAL
LIMITED WARRANTY

PRO SCREWS LIMITED 15-YEAR FASTENER WARRANTY

OUTDOOR SCREWS

APPLICATIONS

- Decks
- Fences
- Gazebos

TREATED LUMBER

FLAT HEAD WITH NIBS

STAR DRIVE

COARSE SERRATED THREAD

TYPE 17 POINT

GRAY

Wood & Exterior Screws

HUTTIG-GUARD™ EXTERIOR SCREWS

Pro 15 Year - Decking	55
Premium 50 Year - Decking	56
Premium 50 Year - Composite Decking	57
Platinum Lifetime - Decking	59
Platinum Lifetime - Trim	60

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Product availability varies by location.

53

www.huttig-grip.com

Product availability varies by location.

54

www.huttig-grip.com

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS


DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Professional Outdoor Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head sits flush. Nibs help to pull material from the hole, and to “seat” the head for smoother finished surface.
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited 15 year fastener warranty. See www.huttig.com/warranty for complete details

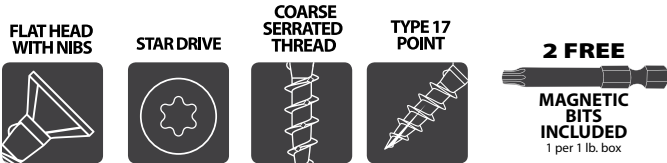

Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
GRAY							
1-1/4" x 8	T-20 Star	236	HGG114PRO1	HGG114PRO5	HGG114PRO25	HGG114PRO8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PRO1	HGG158PRO5	HGG158PRO25	HGG158PRO5M	5,000
2" x 8	T-20 Star	154	HGG2PRO1	HGG2PRO5	HGG2PRO25	HGG2PRO35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PRO1	HGG212PRO5	HGG212PRO25	HGG212PRO25M	2,500
3" x 9	T-25 Star	83	HGG3PRO1	HGG3PRO5	HGG3PRO25	HGG3PRO2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PRO1	HGG312PRO5	HGG312PRO25	HGG312PRO1M	1,000
4" x 10	T-25 Star	54	HGG4PRO1	HGG4PRO5	HGG4PRO25	HGG4PRO1M	1,000




Product availability varies by location.

Premium Outdoor Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head sits flush. Nibs help to pull material from the hole, and to “seat” the head for smoother finished surface.
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited 50 year fastener warranty. See www.huttig.com/warranty for complete details

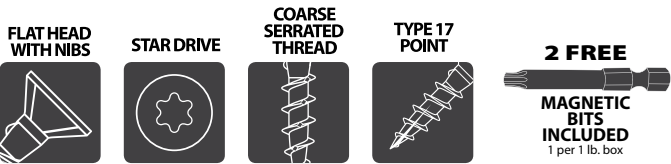

Available colors:



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
BROWN							
1-1/4" x 8	T-20 Star	236	HGG114PREBN1	HGG114PREBN5	HGG114PREBN25	HGG114PREBN8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PREBN1	HGG158PREBN5	HGG158PREBN25	HGG158PREBN5M	5,000
2" x 8	T-20 Star	154	HGG2PREBN1	HGG2PREBN5	HGG2PREBN25	HGG2PREBN35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PREBN1	HGG212PREBN5	HGG212PREBN25	HGG212PREBN25M	2,500
3" x 9	T-25 Star	83	HGG3PREBN1	HGG3PREBN5	HGG3PREBN25	HGG3PREBN2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PREBN1	HGG312PREBN5	HGG312PREBN25	HGG312PREBN1M	1,000
4" x 10	T-25 Star	54	HGG4PREBN1	HGG4PREBN5	HGG4PREBN25	HGG4PREBN1M	1,000
GREEN							
1-1/4" x 8	T-20 Star	236	HGG114PREGN1	HGG114PREGN5	HGG114PREGN25	HGG114PREGN8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PREGN1	HGG158PREGN5	HGG158PREGN25	HGG158PREGN5M	5,000
2" x 8	T-20 Star	154	HGG2PREGN1	HGG2PREGN5	HGG2PREGN25	HGG2PREGN35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PREGN1	HGG212PREGN5	HGG212PREGN25	HGG212PREG25M	2,500
3" x 9	T-25 Star	83	HGG3PREGN1	HGG3PREGN5	HGG3PREGN25	HGG3PREGN2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PREGN1	HGG312PREGN5	HGG312PREGN25	HGG312PREGN1M	1,000
4" x 10	T-25 Star	54	HGG4PREGN1	HGG4PREGN5	HGG4PREGN25	HGG4PREGN1M	1,000
RED							
1-1/4" x 8	T-20 Star	236	HGG114PRERD1	HGG114PRERD5	HGG114PRERD25	—	8,000
1-5/8" x 8	T-20 Star	188	HGG158PRERD1	HGG158PRERD5	HGG158PRERD25	—	5,000
2" x 8	T-20 Star	154	HGG2PRERD1	HGG2PRERD5	HGG2PRERD25	—	3,500
2-1/2" x 9	T-25 Star	99	HGG212PRERD1	HGG212PRERD5	HGG212PRERD25	HGG212PRER25M	2,500
3" x 9	T-25 Star	83	HGG3PRERD1	HGG3PRERD5	HGG3PRERD25	—	2,000
3-1/2" x 10	T-25 Star	61	HGG312PRERD1	HGG312PRERD5	HGG312PRERD25	HGG312PRERD1M	1,000
4" x 10	T-25 Star	54	HGG4PRERD1	HGG4PRERD5	HGG4PRERD25	—	1,000
TAN							
1-1/4" x 8	T-20 Star	236	HGG114PRETN1	HGG114PRETN5	HGG114PRETN25	HGG114PRETN8M	8,000
1-5/8" x 8	T-20 Star	188	HGG158PRETN1	HGG158PRETN5	HGG158PRETN25	HGG158PRETN5M	5,000
2" x 8	T-20 Star	154	HGG2PRETN1	HGG2PRETN5	HGG2PRETN25	HGG2PRETN35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212PRETN1	HGG212PRETN5	HGG212PRETN25	HGG212PRET25M	2,500
3" x 9	T-25 Star	83	HGG3PRETN1	HGG3PRETN5	HGG3PRETN25	HGG3PRETN2M	2,000
3-1/2" x 10	T-25 Star	61	HGG312PRETN1	HGG312PRETN5	HGG312PRETN25	HGG312PRETN1M	1,000
4" x 10	T-25 Star	54	HGG4PRETN1	HGG4PRETN5	HGG4PRETN25	HGG4PRETN1M	1,000

Product availability varies by location.

CONSTRUCTION FASTENERS


WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

HUTTIG-GUARD™ Premium Composite Screw

Color Cross-Reference

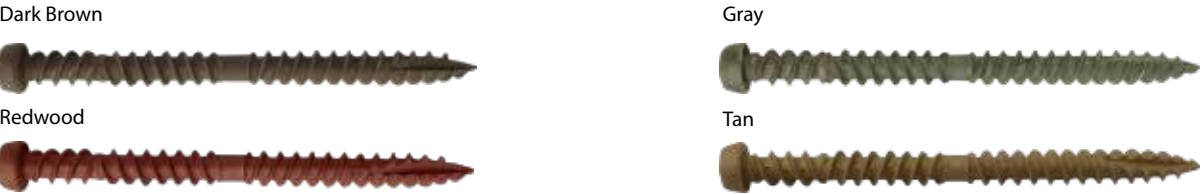

Huttig-Guard Premium Composite Deck Screw					Huttig-Guard Premium Composite Deck Screw					Huttig-Guard Premium Composite Deck Screw				
AZEK Deckboard Color					EVERGRAIN Deckboard Color					MOISTURESHIELD Deckboard Color				
Acacia	X				Barnwood Plank	X				Aurora Mist		X		
Brazilian Walnut	X				Cape Cod Gray		X			Brazilian Chestnut	X			
Brownstone				X	Caribou Brown	X				Bridle	X			
Dark Hickory	X				Greywood		X			Cape Cod Gray		X		
					Harbor Gray		X			Earthtone				X
Island Oak		X			Redwood			X		Golden Teak	X			
Kona	X				Rustic Walnut	X				Graystone		X		
Mahogany	X				Shaded Auburn	X				Northern Hickory	X			
Morado	X				Spiced Teak	X				Rosewood			X	
Mountain Redwood	X				Tangled Twine	X				Southern Barnwood		X		
Slate Gray		X			Weathered Wood	X				Tigerwood	X			
					Woodland Bark	X				Walnut	X			
DECKORATORS Deckboard Color					FIBERON Deckboard Color					TIMBERTECH Deckboard Color				
Ashwood		X			Barnwood Brown	X				Antigua Gold	X			
Barrel-Aged Oak	X				Brown	X				Ashwood		X		
Cedar	X				Brownstone	X				Cedar			X	
Dusk		X			Burnt Umber	X				Mocha	X			
Gray		X			Cabin	X				Rustic Elm	X			
Hickory	X				Canyon Brown	X				Silver Maple		X		
Ironwood	X				Castle Gray		X			TREX Deckboard Color				
Kingwood	X				Chestnut	X				Slate		X		
Mesquite	X				Cinnabar			X		Clam Shell		X		
Milled Maple				X	Cottage		X			Fire Pit			X	
Prairie	X				Espresso	X				Havana Gold	X			
Redwood	X				Earthstone	X				Island Mist		X		
Ridgeway		X			Flagstone		X			Lava Rock	X			
Riverhouse	X				Fossil			X		Madeira			X	
Sandlewood				X	Front Porch Gray		X			Pebble Gray		X		
Walnut	X				Graphite		X			Saddle Rose	X			
Woodland	X				Latte	X				Tree House	X			
DURALIFE Deckboard Color					Rosewood			X		Vintage Lantern	X			
Charcoal Gray		X			Sandstone		X			Winchester Gray		X		
Garapa Gray		X			Tudor Brown	X								
Golden Teak	X				Warm Sienna	X								
Mahogany	X													
Merlot	X													
Pebble				X										
Saratoga Brown	X													
Slate Gray		X												
Spanish Cedar	X													
Tropical Walnut	X													

This chart is to be used as only a reference guide when choosing fastener colors and does not guarantee an exact color match

Huttig-Grip™ and Huttig Building Products, Inc. are trademarks of Huttig Building Products, Inc. Other product and company names listed may be trademarks of their respective owners. Huttig Building Products, Inc. is not affiliated with the other products and companies listed.

Product availability varies by location.


COMPOSITE DECKING

HUTTIG-GUARD™

Premium Composite Deck Screw

For attaching composite decking to deck frame.

- 12-point star drive for better engagement, more torque
- Mushroom head not much larger than shank, designed to sink to the hole, trapping material beneath, eliminating head pop-ups on deck surface
- Triple-thread design traps material within the hole, away from surface
- Type 17 point designed for use with dense, harder materials, eliminates splitting at end of boards
- Limited 50 year fastener warranty. See www.huttig.com/warranty for complete details



Available colors:



Length x Gauge	Drive	Approx. count / lb.	350 Piece Box 5 / master	1,750 Piece Bucket
DARK BROWN				
2-1/2" x 9	T-20 Star	—	HGG212CDB350	HGG212CDB175M
2-3/4" x 9	T-20 Star	77	HGG234CDB350	HGG234CDB175M
GRAY				
2-1/2" x 9	T-20 Star	—	HGG212CGY350	HGG212CGY175M
2-3/4" x 9	T-20 Star	77	HGG234CGY350	HGG234CGY175M
REDWOOD				
2-3/4" x 9	T-20 Star	77	HGG234CRD350	HGG234CRD175M
TAN				
2-3/4" x 9	T-20 Star	77	HGG234CTN350	HGG234CTN175M

INSTALLATION TIP

- 350 piece installs 100 ft.²
- 1,750 piece installs 500 ft.²




Product availability varies by location.

Platinum Outdoor Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head sits flush. Nibs help to pull material from the hole, and to “seat” the head for smoother finished surface.
- Coarse, serrated thread cuts through wood using less torque
- Knurled shank for reduced drag, faster, easier penetration*
- Type 17 long point fluting moves more chips out of the hole
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details

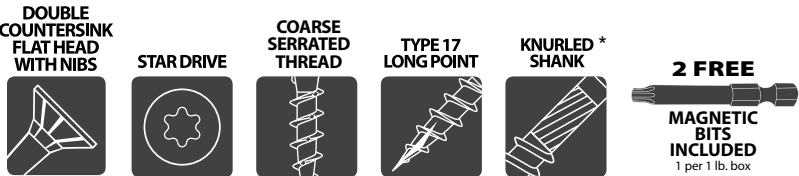

Available colors:

Bronze



Green



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 5 / master	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
BRONZE								
1-1/4" x 8	T-20 Star	216	—	HGG114PLTBZ1	HGG114PLTBZ5	HGG114PLTBZ25	HGG114PLTBZ8M	8,000
1-5/8" x 8	T-20 Star	162	—	HGG158PLTBZ1	HGG158PLTBZ5	HGG158PLTBZ25	HGG158PLTBZ5M	5,000
2" x 8	T-20 Star	143	—	HGG2PLTBZ1	HGG2PLTBZ5	HGG2PLTBZ25	HGG2PLTBZ35M	3,500
2-1/2" x 9	T-25 Star	89	—	HGG212PLTBZ1	HGG212PLTBZ5	HGG212PLTBZ25	HGG212PLTBZ25M	2,500
3" x 9	T-25 Star	76	—	HGG3PLTBZ1	HGG3PLTBZ5	HGG3PLTBZ25	HGG3PLTBZ2M	2,000
3-1/2" x 10	T-25 Star	54	—	HGG312PLTBZ1	HGG312PLTBZ5	HGG312PLTBZ25	HGG312PLTBZ1M	1,000
4" x 10	T-25 Star	47	—	HGG4PLTBZ1	HGG4PLTBZ5	HGG4PLTBZ25	HGG4PLTBZ1M	1,000
5" x 10	T-25 Star	38	HGG5PLTBZ1	HGG5PLTBZ1	HGG5PLTBZ5	HGG5PLTBZ25	HGG5PLTBZ750	750
6" x 10	T-25 Star	32	HGG6PLTBZ1	HGG6PLTBZ1	HGG6PLTBZ5	HGG6PLTBZ25	HGG6PLTBZ600	600
GREEN								
1-1/4" x 8	T-20 Star	216	—	HGG114PLTGN1	HGG114PLTGN5	HGG114PLTGN25	HGG114PLTGN8M	8,000
1-5/8" x 8	T-20 Star	162	—	HGG158PLTGN1	HGG158PLTGN5	HGG158PLTGN25	HGG158PLTGN5M	5,000
2" x 8	T-20 Star	143	—	HGG2PLTGN1	HGG2PLTGN5	HGG2PLTGN25	—	—
2-1/2" x 9	T-25 Star	89	—	HGG212PLTGN1	HGG212PLTGN5	HGG212PLTGN25	HGG212PLTG25M	2,500
3" x 9	T-25 Star	76	—	HGG3PLTGN1	HGG3PLTGN5	HGG3PLTGN25	HGG3PLTGN2M	2,000
3-1/2" x 10	T-25 Star	54	—	HGG312PLTGN1	HGG312PLTGN5	HGG312PLTGN25	HGG312PLTGN1M	1,000
4" x 10	T-25 Star	47	—	HGG4PLTGN1	HGG4PLTGN5	HGG4PLTGN25	—	—
5" x 10	T-25 Star	38	HGG5PLTGN1	—	HGG5PLTGN5	HGG5PLTGN25	HGG5PLTGN750	750
6" x 10	T-25 Star	32	HGG6PLTGN1	—	HGG6PLTGN5	HGG6PLTGN25	HGG5PLTGN600	600


* NOTE: Knurled shank not available on 1-1/4" screws

Product availability varies by location.

Platinum Trim Screw

For attaching deck boards, railings, and trim.

- 12-point star drive for better engagement, more torque
- Relatively small head, sinks beneath the surface for low visibility. Nibs help to “seat” the head into the hole.Coarse, serrated thread uses less torque to cut through wood
- Knurled shank for reduced drag, faster, easier penetration
- Type 17 long point designed for use with thicker pieces of hardwood
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details

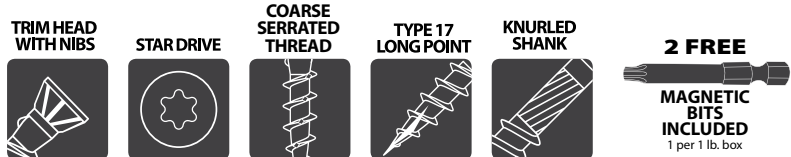

Available colors:

Bronze



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
BRONZE						
1-5/8" x 9	T-20 Star	146	HGG158PLTHBZ1	HGG158PLTHBZ5	HGG158PLTHZ4M	4,000
2-1/4" x 9	T-20 Star	105	HGG214PLTHBZ1	—	—	2,500
2-1/2" x 9	T-20 Star	97	HGG212PLTHBZ1	HGG212PLTHBZ5	HGG212PLTHZ25M	2,500
3" x 9	T-20 Star	82	HGG3PLTHBZ1	HGG3PLTHBZ5	HGG3PLTHZ2M	2,000
GREEN						
1-5/8" x 9	T-20 Star	146	HGG158PLTHGN1	HGG158PLTHGN5	HGG158PLTHG4M	4,000
2-1/4" x 9	T-20 Star	105	HGG214PLTHGN	—	HGG214PLTHG25M	2,500
2-1/2" x 9	T-20 Star	97	HGG212PLTHGN1	HGG212PLTHGN5	HGG212PLTHG25M	2,500
3" x 9	T-20 Star	82	HGG3PLTHGN1	HGG3PLTHGN5	HGG3PLTHG2M	2,000

Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
BRONZE						
1-5/8" x 7	T-15 Star	170	HGG7158PLTHZ1	HGG7158PLTHZ5	—	4,000
2-1/4" x 7	T-15 Star	125	HGG7214PLTHZ1	HGG7214PLTHZ5	—	2,500
2-1/2" x 7	T-15 Star	115	HGG7212PLTHZ1	HGG7212PLTHZ5	HGG212PLTHZ25M	2,500
3" x 7	T-15 Star	96	HGG73PLTHZ1	HGG73PLTHZ5	HGG3PLTHZ2M	2,000
GREEN						
1-5/8" x 7	T-15 Star	170	HGG7158PLTHG1	HGG7158PLTHG5	—	4,000
2-1/4" x 7	T-15 Star	125	HGG7214PLTHG1	HGG7214PLTHG5	—	2,500
2-1/2" x 7	T-15 Star	115	HGG7212PLTHG1	HGG7212PLTHG5	—	2,500
3" x 7	T-15 Star	96	HGG73PLTHG1	HGG73PLTHG5	—	2,000

Product availability varies by location.

HUTTIG-GUARD™ Stainless Steel

Recommended for use **outdoors**, with **treated lumber**, and in other **high-corrosive environments**.

Limited Lifetime Fastener Warranty



305 STAINLESS STEEL
recommended for use with:



316 STAINLESS STEEL
recommended for use with:



STAINLESS STEEL

OUTDOOR SCREWS

APPLICATIONS

- Decks
- Docks
- Fences
- Gazebos
- General Construction



STAINLESS STEEL

TRIM SCREWS

APPLICATIONS

- Railings, Narrow Deck Boards, Stair Treads
- Trim - Wood, PVC, or Composite



STAINLESS STEEL



WHITE

Wood & Exterior Screws

HUTTIG-GUARD™ STAINLESS STEEL SCREWS

Stainless Steel - Decking	63
Stainless Steel - Trim	64



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS


DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Stainless Steel Screw

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head sits flush. Nibs help to pull material from the hole, and to “seat” the head for smoother finished surface.
- Coarse thread cuts through wood
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details

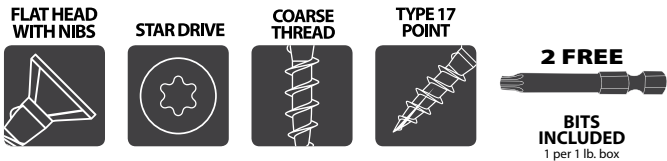

Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
305 STAINLESS STEEL							
1-1/4" x 8	T-20 Star	202	HGG114SS1	HGG114SS5	HGG114SS25	HGG114SS8M	8,000
1-5/8" x 8	T-20 Star	161	HGG158SS1	HGG158SS5	HGG158SS25	HGG158SS5M	5,000
2" x 8	T-20 Star	135	HGG2SS1	HGG2SS5	HGG2SS25	HGG2SS35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212SS1	HGG212SS5	HGG212SS25	HGG212SS25M	2,500
3" x 9	T-25 Star	82	HGG3SS1	HGG3SS5	HGG3SS25	HGG3SS2M	2,000
3-1/2" x 10	T-25 Star	60	HGG312SS1	HGG312SS5	HGG312SS25	HGG312SS1M	1,000
4" x 10	T-25 Star	53	HGG4SS1	HGG4SS5	HGG4SS25	HGG4SS1M	1,000
316 STAINLESS STEEL							
1-1/4" x 8	T-20 Star	202	HGG114161	HGG114165	HGG114SS1625	HGG114SS168M	8,000
1-5/8" x 8	T-20 Star	161	HGG158161	HGG158165	HGG158SS1625	HGG158SS165M	5,000
2" x 8	T-20 Star	135	HGG2161	HGG2165	HGG2SS1625	HGG2SS1635M	3,500
2-1/2" x 9	T-25 Star	99	HGG212161	HGG212165	HGG212SS1625	HGG212SS1625M	2,500
3" x 9	T-25 Star	82	HGG3161	HGG3165	HGG3SS1625	HGG3SS162M	2,000
3-1/2" x 10	T-25 Star	60	HGG312161	HGG312165	HGG312SS1625	HGG312SS161M	1,000
4" x 10	T-25 Star	53	HGG4161	HGG4165	HGG4SS1625	HGG4SS161M	1,000




Product availability varies by location.

Stainless Steel Trim Screw

For attaching deck boards, railings, and trim.

- 12-point star drive for better engagement, more torque
- Relatively small head, sinks beneath the surface for low visibility. Nibs help to “seat” the head into the hole.
- Coarse thread cuts through wood
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited Lifetime Fastener Warranty. See www.huttig.com/warranty for complete details

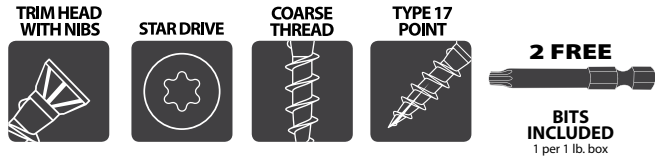

Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
305 STAINLESS STEEL					
1-5/8" x 9	T-20 Star	144	HGG158SSTRM1	HGG158SSTRM5	HGG158SSTRM25
2-1/4" x 9	T-20 Star	104	HGG214SSTRM1	HGG214SSTRM5	—
2-1/2" x 9	T-20 Star	95	HGG212SSTRM1	HGG212SSTRM5	HGG212SSTRM25
3" x 9	T-20 Star	81	HGG3SSTRM1	HGG3SSTRM5	HGG3SSTRM25
305 STAINLESS STEEL - PAINTED WHITE					
2-1/4" x 9	T-20 Star	104	HGG214SSSTRMWH1	—	—
316 STAINLESS STEEL					
1-5/8" x 9	T-20 Star	144	HGG15816TRM1	HGG15816TRM5	HGG15816TRM25
2-1/4" x 9	T-20 Star	104	HGG21416TRM1	HGG21416TRM5	—
2-1/2" x 9	T-20 Star	95	HGG21216TRM1	HGG21216TRM5	HGG21216TRM25
3" x 9	T-20 Star	81	HGG316TRM1	HGG316TRM5	HGG316TRM25

Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
305 STAINLESS STEEL					
1-5/8" x 7	T-15 Star	170	HGG7158SSTRM1	HGG7158SSTRM5	HGG7158SSTRM25
2-1/4" x 7	T-15 Star	125	HGG7214SSTRM1	HGG7214SSTRM5	HGG7214SSTRM25
2-1/2" x 7	T-15 Star	115	HGG7212SSTRM1	HGG7212SSTRM5	HGG7212SSTRM25
3" x 7	T-15 Star	96	HGG73SSTRM1	HGG73SSTRM5	HGG73SSTRM25
305 STAINLESS STEEL - PAINTED WHITE					
1-5/8" 7	T-15 Star	170	HGG7158SSTRMWH1	—	—
2-1/4" x 7	T-15 Star	125	HGG7214SSTRMWH1	—	—
316 STAINLESS STEEL					
1-5/8" x 7	T-15 Star	170	HGG715816TRM1	HGG715816TRM5	HGG715816TRM25
2-1/4" x 7	T-15 Star	125	HGG721416TRM1	HGG721416TRM5	HGG721416TRM25
2-1/2" x 7	T-15 Star	115	HGG721216TRM1	HGG721216TRM5	HGG721216TRM25
3" x 7	T-15 Star	96	HGG7316TRM1	HGG7316TRM5	—

Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



Drywall & Steel Framing Screws

HUTTIG-GRIP™ & HUTTIG-SPIN™



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

Product availability varies by location.

HUTTIG-GRIP™ Drywall Screws

DRYWALL

DRYWALL-TO-WOOD SCREWS

Fine thread, sharp point commonly used when attaching “soft” materials to wood or to light-gauge steel, such as wood trim to light-gauge steel stud. Limited or no resistance to corrosion.

Coarse thread, sharp point commonly used when attaching gypsum board to wood or gypsum board to gypsum board. Limited or no resistance to corrosion.

STYLES

- Drywall Screw - Fine Thread
- Drywall Screw - Coarse Thread

FINISH



Drywall & Steel Framing Screws

HUTTIG-GRIP™ DRYWALL SCREWS

Drywall Screws	
■ Coarse Thread.....	69
■ Fine Thread.....	70

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov


Product availability varies by location.

Product availability varies by location.

Drywall Screw - Coarse Thread

For attaching sheets of drywall to wood studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, coarse thread for use with wood.



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
PHOSPHATE COATED					
1" x 6	#2 Phillips	341	HGS1CDW1	HGS1CDW5	HGS1CDW25
1-1/8" x 6	#2 Phillips	295	HGS118CDW1	HGS118CDW5	—
1-1/4" x 6	#2 Phillips	278	HGS114CDW1	HGS114CDW5	HGS114CDW25
1-5/8" x 6	#2 Phillips	217	HGS158CDW1	HGS158CDW5	HGS158CDW25
2" x 6	#2 Phillips	186	HGS2CDW1	HGS2CDW5	HGS2CDW25
2-1/2" x 8	#2 Phillips	110	HGS212CDW1	HGS212CDW5	HGS212CDW25
3" x 8	#2 Phillips	90	HGS3CDW1	HGS3CDW5	HGS3CDW25
3-1/2" x 10	#2 Phillips	55	HGS312CDW1	HGS312CDW5	—
4" x 10	#2 Phillips	50	HGS4CDW1	HGS4CDW5	—
5" x 10	#2 Phillips	39	HGS5CDW1	—	—
6" x 10	#2 Phillips	33	HGS6CDW1	—	—


Available Finish



Drywall Screw - Fine Thread

For attaching sheets of drywall to light-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, fine thread for use with light gauge steel



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
PHOSPHATE COATED							
1" x 6	#2 Phillips	336	HGS1FDW1	HGS1FDW5	—	HGS1FDW10M	10,000
1-1/8" x 6	#2 Phillips	295	HGS118FDW1	HGS118FDW5	—	HGS118FDW10M	10,000
1-1/4" x 6	#2 Phillips	278	HGS114FDW1	HGS114FDW5	HGS114FDW25	HGS114FDW8M	8,000
1-5/8" x 6	#2 Phillips	217	HGS158FDW1	HGS158FDW5	HGS158FDW25	HGS158FDW5M	5,000
2" x 6	#2 Phillips	186	HGS2FDW1	HGS2FDW5	HGS2FDW25	HGS2FDW35M	3,500
2-1/2" x 8	#2 Phillips	110	HGS212FDW1	HGS212FDW5	HGS212FDW25	HGS212FDW25M	2,500
3" x 8	#2 Phillips	90	HGS3FDW1	HGS3FDW5	HGS3FDW25	HGS3FDW2M	2,000

Available Finish



HUTTIG-SPIN™ Commercial Fasteners

Designed for use with drywall & steel framing

Color coded packaging help guide you to the five main categories by application.

- DRYWALL
- LIGHT GAUGE STEEL
- HEAVY GAUGE STEEL
- CEMENT & FIBER CEMENT
- WOOD

DRYWALL-TO-WOOD SCREWS

Coarse thread, sharp point commonly used when attaching gypsum board to wood or gypsum board to gypsum board. Limited or no resistance to corrosion.

STYLES

- Drywall Screw - Coarse Thread
- Laminating Screw

FINISH



LIGHT GAUGE STEEL SCREWS

Fine thread, sharp point commonly used when attaching “soft” materials to wood or to light-gauge steel, such as wood trim to light-gauge steel stud. Limited or no resistance to corrosion.

STYLES

- Drywall Screw - Fine Thread
- Modified Truss Screw
- Pan Framers Screw
- Phillips Wafer Head Screw
- Slotted Hex Washer Head Screw
- Trim Screw

FINISHES



HEAVY GAUGE STEEL SCREWS

Fine thread, self-drill used when working with harder materials, including metal, and/or attaching to heavier-gauge steel. Limited or no resistance to corrosion.

STYLES

- Drywall Screw - Self-drill
- Eye Lag Screw
- Hex Washer Head Screw
- Modified Truss Screw
- Pan Framers Screw
- Pan Head Screw
- Phillips Wafer Head Screw
- Trim Screw

FINISHES



CEMENT & FIBER CEMENT SCREWS

Spade point used when attaching cement board to wood or to light-gauge steel studs.
Self-drill used for attaching cement or fiber cement boards to heavier-gauge steel studs.
Lifetime limited fastener warranty. Visit huttig.com/warranty for complete limited fastener warranty details.

STYLES

- Cement Board Screw - Wafer Head with Nibs Self-drill
- Cement Board Screw - Wafer Head with Nibs Spade Point
- Fiber Cement Board Screw - Flat Head Self-drill with Wings

FINISH



WOOD FASTENERS

Sharp point for attaching to wood or other “soft” materials. Limited or no resistance to corrosion.

STYLE

- Eye Lag Screw

FINISH



Product availability varies by location.

Drywall & Steel Framing Screws

HUTTIG-SPIN™ COMMERCIAL FASTENERS

Drywall Screws

Coarse Thread.....	74
Laminator.....	74
Light Gauge.....	75
Heavy Gauge (self-drill).....	75

Light Gauge Screws

Modified Truss.....	77
Pan Framers.....	77
Wafer Head.....	78
Trim Head.....	78

Heavy Gauge Fasteners

Hex Washer Head.....	79
Modified Truss.....	79
Pan Framers.....	80
Pancake Framers.....	80
Trim Head.....	81
Eye Lag.....	81

Wood Fasteners

Eye Lag.....	82
Partical Board Screws.....	82

Cement Board Screws

Cement Board - Self-drill.....	83
Cement Board - Spade Point.....	83

Product availability varies by location.

HUTTIG-SPIN[™] FASTENERS

Drywall & Steel Framing Screws Designed for the Construction Professional

Sourcing:

- Produced only in approved mills in Taiwan
- All packaging has mill and production codes for traceability

Testing:

- Conducted on all products
- Detailed process, includes sampling during production, plus pre-shipment full inspection report on every batch

Product specifications:

- Developed to meet or exceed industry expectations, based up extensive testing of competitive brands including Grabber, Pro-Twist, Hilti, and ITW Buildex.
- ASTM: All screws are made from C1022 wire

Product identifier: "HS" head stamp for easy identification and streamlined inspections

Complete product mix, bulk & packaged programs

- Drywall Screws – coarse & fine thread
- Drywall Screws – bugle head self-drill
- Laminator Screws
- Modified Truss Screws
- Pan Framer Screws
- Pan Head Screws
- Hex & Slotted Hex Washer Head Screws
- Cement & Fiber Cement Board Screws
- Trim Screws
- Phillips Wafer Head Screws

Packaging is color-coded by application = easy product identification

DRYWALL

For attaching drywall to wood

AVAILABLE FINISH

PC
PHOSPHATE
COATED



LIGHT GAUGE

For attaching drywall and other materials to light-gauge steel

AVAILABLE FINISHES

PC
PHOSPHATE
COATED

ZP
ZINC
PLATED



HEAVY GAUGE

For attaching drywall and other materials to heavy-gauge steel

AVAILABLE FINISHES

PC
PHOSPHATE
COATED

ZP
ZINC
PLATED



CEMENT BOARD

For attaching cement and fiber cement board

AVAILABLE FINISH

**50 YEAR
PREMIUM
LIMITED WARRANTY**



HUTTIG-SPIN[™]

DRYWALL


Drywall Screw - Coarse Thread

For attaching gypsum board and wood to wood studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, coarse thread for use with wood

Available Finish

PC
PHOSPHATE
COATED



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE COATED							
1" x 6	#2 Phillips	Sharp	341	HSP1CT1	—	HSP1CT10M	10,000
1-1/8" x 6	#2 Phillips	Sharp	295	—	—	HSP118CT10M	10,000
1-1/4" x 6	#2 Phillips	Sharp	278	HSP114CT1	HSP114CT5	HSP114CT8M	8,000
1-5/8" x 6	#2 Phillips	Sharp	242	HSP158CT1	HSP158CT5	HSP158CT5M	5,000
2" x 6	#2 Phillips	Sharp	186	HSP62CT1	HSP62CT5	HSP62CT35M	3,500
2-1/2" x 8	#2 Phillips	Sharp	110	HSP212CT1	HSP212CT5	HSP212CT25M	2,500
3" x 8	#2 Phillips	Sharp	90	HSP3CT1	HSP3CT5	HSP3CT2M	2,000


Laminating Screw

For attaching layers of gypsum boards together.

- Extra-heavy gauge for greater holding power
- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point for drilling through gypsum board and paper backing or into wood

Available Finish

PC
PHOSPHATE
COATED



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE COATED							
1-1/2" x 10	#2 Phillips	Sharp	130	HSP112LAM1	HSP112LAM5	HSP112LAM5M	5,000


Product availability varies by location.

Product availability varies by location.

Drywall Screw - Fine Thread

For attaching gypsum board to light-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, fine thread for use with light-gauge steel



Available Finish




Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE COATED							
1-1/8" x 6	#2 Phillips	Sharp	295	—	—	HSP118FT10M	10,000
1-1/4" x 6	#2 Phillips	Sharp	278	HSP114FT1	HSP114FT5	HSP114FT8M	8,000
1-5/8" x 6	#2 Phillips	Sharp	217	HSP158FT1	HSP158FT5	HSP158FT5M	5,000
2" x 6	#2 Phillips	Sharp	186	—	HSP62FT5	HSP62FT35M	3,500
3" x 8	#2 Phillips	Sharp	90	—	—	HSP3FT2M	2,000

Drywall Screw - Self-Drill

For attaching gypsum board to heavy-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Self-drill point, fine thread for use with steel



Available Finishes



Phosphate Coated



Zinc Plated



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE COATED							
1-1/8" x 6	#2 Phillips	Self-drill	272	HSPQ118DW1	—	—	—
1-1/4" x 6	#2 Phillips	Self-drill	255	HSPQ114DW1	HSPQ114DW5	HSPQ114DW8M	8,000
1-5/8" x 6	#2 Phillips	Self-drill	211	HSPQ158DW1	HSPQ158DW5	HSPQ158DW5M	5,000
1-7/8" x 6	#2 Phillips	Self-drill	178	HSPQ178DW1	HSPQ178DW5	HSPQ178DW4M	4,000
2-3/8" x 8	#2 Phillips	Self-drill	105	HSPQ238DW1	HSPQ238DW5	HSPQ238DW3M	3,000
2-5/8" x 8	#2 Phillips	Self-drill	96	HSPQ258DW1	HSPQ258DW5	HSPQ258DW2M	2,000
3" x 8	#2 Phillips	Self-drill	84	HSPQ3DW1	HSPQ3DW5	HSPQ3DW2M	2,000
ZINC PLATED							
1-1/8" x 6	#2 Phillips	Self-drill	272	—	HSPQ118DWZ5	HSPQ118DWZ10M	10,000
1-1/4" x 6	#2 Phillips	Self-drill	255	HSPQ114DWZ1	HSPQ114DWZ5	HSPQ114DWZ8M	8,000
1-5/8" x 6	#2 Phillips	Self-drill	211	HSPQ158DWZ1	HSPQ158DWZ5	HSPQ158DWZ5M	5,000
1-7/8" x 6	#2 Phillips	Self-drill	178	HSPQ178DWZ1	HSPQ178DWZ5	HSPQ178DWZ4M	4,000
2-3/8" x 8	#2 Phillips	Self-drill	105	HSPQ238DWZ1	HSPQ238DWZ5	HSPQ238DWZ3M	3,000
2-5/8" x 8	#2 Phillips	Self-drill	96	—	HSPQ258DWZ5	HSPQ258DWZ2M	2,000
3" x 8	#2 Phillips	Self-drill	84	—	HSPQ3DWZ5	HSPQ3DWZ2M	2,000

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

Modified Truss

- For attaching metal lath to wood or light-gauge steel studs or where low profile is desired.
- Wide head holds material in place, low profile for use with low clearance and/or minimized appearance
 - Sharp point, fine thread for use with light gauge steel

Available Finish



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
ZINC PLATED							
1/2" x 8	#2 Phillips	Sharp	273	HSP12MDTR1	HSP12MDTR5	HSP12MDTR10M	10,000
3/4" x 8	#2 Phillips	Sharp	216	HSP34MDTR1	HSP34MDTR5	HSP34MDTR8M	8,000
1" x 8	#2 Phillips	Sharp	183	HSP1MDTR1	HSP1MDTR5	HSP1MDTR5M	5,000
1-1/4" x 8	#2 Phillips	Sharp	156	HSP114MDTR1	HSP114MDTR5	HSP114MDTR5M	5,000
1-5/8" x 8	#2 Phillips	Sharp	128	HSP158MDTR1	HSP158MDTR5	HSP158MDTR5M	5,000
1-7/8" x 8	#2 Phillips	Sharp	118	HSP178MDTR1	HSP178MDTR5	HSP178MDTR4M	4,000
2" x 8	#2 Phillips	Sharp	110	HSP2MDTR1	HSP2MDTR5	HSP2MDTR25M	2,500
2-1/2" x 8	#2 Phillips	Sharp	91	HSP212MDTR1	HSP212MDTR5	HSP212MDTR2M	2,000
3" x 8	#2 Phillips	Sharp	78	HSP3MDTR1	—	HSP3MDTR15M	1,500

Pan Framer

- For attaching light-gauge steel track to light-gauge steel studs where high torque is required.
- Pan framer head allows relatively high torque with wide base to keep material in place
 - Sharp point, fine thread for use with light gauge steel

Available Finish




Enlarged to show detail

Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOSPHATE COATED							
7/16" x 7	#2 Phillips	Sharp	363	HSP716PAN1	HSP716PAN5	HSP716PAN15M	15,000

Phillips Wafer Head Screw

- For attaching plywood to light-gauge steel.
- Trim head for concealment
 - Sharp point, fine thread for use with light gauge steel
 - Limited 50 year fastener warranty. See www.huttig.com/warranty for complete details.

Available Finish

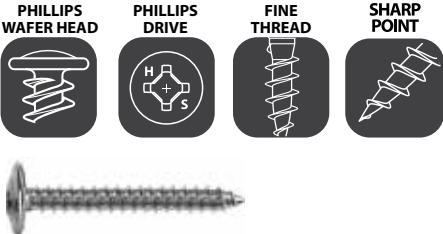


Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
PREMIUM 50 YEAR FINISH					
1-1/4" x 10	#2 Reduced Phillips	Sharp	114	HSP114WFH1	HSP114WFH5

Trim Head Screw

- For attaching wood trim over single and double layer gypsum board to light-gauge steel or wood.
- Trim head for concealment
 - Sharp point, fine thread for use with light gauge steel

Available Finish



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
PHOSPHATE COATED					
1-5/8" x 6	#1 Square	Sharp	214	HSP158TRM1	—
2-1/4" x 6	#1 Square	Sharp	156	HSP214TRM1	—
3" x 8	#2 Square	Sharp	94	HSP3TRM1	HSP3TRM5

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS


COLLATED FASTENERS

CONSTRUCTION FASTENERS

Hex Washer Head Screw - Self-Drill

10 Gauge for attaching medium-gauge sheet metal such as HVAC to steel framing.
12 Gauge for attaching purlins and channels to structural studs.

- Hex head for high torque, flange at base prevents pull-through
- Self-drill point, fine thread for use with steel




Length x Gauge	Head / Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
ZINC PLATED							
3/4" x 8	1/4" Hex	#2 Self-drill	230	HSPQ834HX1	HSPQ834HX5	—	—
1" x	1/4" Hex	#2 Self-drill	182	HSPQ81HX1	HSPQ81HX5	—	—
3/4" x 10	5/16" Hex	#3 Self-drill	163	HSPQ1034HX1	HSPQ1034HX5	HSPQ1034HX6M	6,000
1" x 10	5/16" Hex	#3 Self-drill	141	HSPQ101HX1	HSPQ101HX5	—	—
1-1/4" x 10	5/16" Hex	#3 Self-drill	121	—	—	HSPQ10114HX4M	4,000
1-1/2" x 10	5/16" Hex	#3 Self-drill	106	HSPQ10112HX1	HSPQ10112HX5	—	—
3/4" x 12	5/16" Hex	#3 Self-drill	129	HSPQ1234HX1	HSPQ1234HX5	—	—
1-1/2" x 12	5/16" Hex	#3 Self-drill	79	HSPQ12112HX1	—	—	—
2" x 12	5/16" Hex	#5 Self-drill	64	HSPQ1225HX1	HSPQ1225HX5	—	—

WOOD & EXTERIOR SCREWS

Modified Truss - Self-Drill

For attaching metal lath to heavy-gauge steel studs or where low profile is desired.

- Wide head holds material in place, low profile for use with low clearance and/or minimized appearance
- Self-drill point, fine thread for use with steel



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
ZINC PLATED							
1/2" x 8	#2 Phillips	#2 Self-drill	273	HSPQ12MDTR1	HSPQ12MDTR5	HSPQ12MDTR10M	10,000
3/4" x 8	#2 Phillips	#2 Self-drill	216	HSPQ34MDTR1	HSPQ34MDTR5	HSPQ34MDTR10M	10,000
1" x 8	#2 Phillips	#2 Self-drill	183	HSPQ1MDTR1	HSPQ1MDTR5	HSPQ1MDTR8M	8,000
1-1/4" x 8	#2 Phillips	#2 Self-drill	156	HSPQ114MDTR1	HSPQ114MDTR5	HSPQ114MDTR6M	6,000
1-5/8" x 8	#2 Phillips	#2 Self-drill	128	HSPQ158MDTR1	HSPQ158MDTR5	HSPQ158MDTR5M	5,000
1-7/8" x 8	#2 Phillips	#2 Self-drill	118	—	HSPQ178MDTR5	HSPQ178MDTR3M	3,000
2" x 8	#2 Phillips	#2 Self-drill	110	HSPQ2MDTR1	HSPQ2MDTR5	HSPQ2MDTR25M	2,500
2-1/2" x 8	#2 Phillips	#2 Self-drill	91	HSPQ212MDTR1	HSPQ212MDTR5	HSPQ212MDTR2M	2,000
3" x 8	#2 Phillips	#2 Self-drill	78	HSPQ3MDTR1	HSPQ3MDTR5	—	—
3/4" x 10	#2 Phillips	#3 Self-drill	189	HSPQ1034MTR1	HSPQ1034MTR5	HSPQ1034MTR5M	5,000


COLLATED FASTENERS

Product availability varies by location.

Pan Head Screw - Self-Drill

For attaching strapping or furring channel to steel joist.

- Pan head for high-torque installations, lower profile than oval or round heads
- Self-drill point, fine thread for use with steel



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master
ZINC PLATED				
3/4" x 8	#2 Reduced Phillips	Self-drill	244	HSPQ834JST1

Available Finish




CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

Pancake Frammer - Self-Drill

For attaching medium - to heavy-gauge stud track to medium- to heavy-gauge steel studs.

- Hex head for high torque, flange at base prevents pull-through
- Self-drill point, fine thread for use with steel



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master
ZINC PLATED				
5/8" x 10	#2 Reduced Phillips	Self-drill	195	HSPQ58PKZ1

Available Finish



DRYWALL & STEEL FRAMING SCREWS


COLLATED FASTENERS

Product availability varies by location.

Trim Head Screw - Self-Drill

For attaching wood trim over single and double layer gypsum board to heavy-gauge steel.

- Trim head for concealment
- Self-drill point, fine thread for use with steel



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
PHOSPHATE COATED					
1-5/8" x 6	#1 Square	Self-drill	211	HSPQ158TRM1	HSPQ158TRM5
2-1/4" x 6	#1 Square	Self-drill	150	HSPQ214TRM1	HSPQ214TRM5

Available Finish



Eye Lag Screw

For attaching wire to steel studs for suspended ceiling grid.

- Self-drill point, fine thread for use with steel.



Length	Hole Size	Point	Approx. count / lb.	300 pc. Box 12 / master	Bulk Box	Box Quantity
ZINC PLATED						
2"	1/4"	Self-drill	52	HSP2LAGEYE100	HSP2LAGEYE1M	1,000
3-1/4"	1/4"	Self-drill	34	HSP314LAGEYE100	HSP314LAGEYE1M	1,000

Available Finish



Eye Lag Screw

For attaching wire to wood joists for suspended ceiling grid.

- Coarse thread for use with wood



Length	Hole Size	Approx. count / lb.	300 pc. Box 12 / master	Bulk Box	Box Quantity
BRIGHT					
3"	1/4"	47	HSP3LAGEYE100	HSP3LAGEYE1M	1,000


Available Finish



Particle Board Screw

For use with particle board and other low-density or softer woods.

- Wide head holds material in place, low profile for use with low clearance and/or minimized appearance



Length	Gauge	Head	Drive	Point	Approx. count / lb.	Bulk Box	Box Quantity
ZINC PLATED							
1-1/2"	8.000	Washer	Combination	Type 17	160	HSP112PTBWC5M	5,000

Available Finish




Cement Board Screw - Self-Drill

For attaching cement board to heavy-gauge steel studs.

- Flat head sits flush, nibs help to "seat" head in surface
- Self-drill point, fine thread for use with steel
- Limited 50 year fastener warranty. See www.huttig.com/warranty for complete details.

Available Finish




Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PREMIUM 50 YEAR FINISH							
1-1/4" X 8	T-20 Star	Self-drill	167	HSPQ114CBNB1	HSPQ114CBNB5	HSPQ114CBNB5M	5,000
1-5/8" x 8	T-20 Star	Self-drill	135	HSPQ158CBNB1	HSPQ158CBNB5	—	—

Cement Board Screw - Spade Point

For attaching cement board to wood or to light-gauge steel studs.

- Flat head sits flush, nibs help to "seat" head in surface
- Spade point bores through cement board without cracking
- High-low thread for easier drilling with greater pull-out resistance
- Limited 50 year fastener warranty. See www.huttig.com/warranty for complete details.

Available Finish



Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PREMIUM 50 YEAR FINISH							
1-1/4" x 8	T-20 Star	Spade	167	HSP114CBSP1	HSP114CBSP5	HSP114CBSP5M	5,000
1-5/8" x 8	T-20 Star	Spade	135	HSP158CBSP1	HSP158CBSP5	HSP158CBSP5M	5,000





Product availability varies by location.

Collated Fasteners

HUTTIG-GRIP™ & HUTTIG-GUARD™



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

HUTTIG-GRIP™ & HUTTIG-GUARD™ Collated Fasteners

Color coded packaging help guide you to the four main categories by application.

- GENERAL
- OUTDOOR
- ROOFING
- STAINLESS STEEL

Collation icons identify the type of tool that the fasteners are designed to fit.

TYPES/APPLICATIONS	FINISHES
ROOFING	<div>RF</div> <div>EG ELECTRO GALVANIZED</div> <div>HG HOT GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>
FRAMING	<div>15° COIL NAIL WIRE WELD</div> <div>21° ROUND HEAD NAIL PLASTIC</div> <div>28° WIRE WELD NAIL</div> <div>30° PAPER TAPE NAIL</div> <div>BRT BRIGHT</div> <div>EG ELECTRO GALVANIZED</div> <div>HG HOT GALVANIZED</div> <div>OG OUTDOOR GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>
FRAMING	<div>MC METAL CONNECTOR NAIL PAPER</div> <div>BRT BRIGHT</div> <div>HG HOT GALVANIZED</div>
SIDING	<div>0° COIL SIDING NAIL PLASTIC</div> <div>15° COIL SIDING NAIL PLASTIC</div> <div>15° COIL SIDING NAIL WIRE WELD</div> <div>EG ELECTRO GALVANIZED</div> <div>HG HOT GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>
LATH/INSULATION	<div>16 GA WIDE CROWN STAPLE "BCS"-STYLE</div> <div>16 GA WIDE CROWN STAPLE "GSW"-STYLE</div> <div>16 GA WIDE CROWN STAPLE "P"-STYLE</div> <div>EG ELECTRO GALVANIZED</div>
SHEATHING	<div>16 GA MEDIUM CROWN STAPLE "76"-STYLE</div> <div>16 GA MEDIUM CROWN STAPLE "BCS"-STYLE</div> <div>16 GA MEDIUM CROWN STAPLE "GS"-STYLE</div> <div>16 GA MEDIUM CROWN STAPLE "N"-STYLE</div> <div>EG ELECTRO GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>
FINISH/TRIM	<div>18 GA NARROW CROWN STAPLE "SX"-STYLE</div> <div>18 GA NARROW CROWN STAPLE "L"-STYLE</div> <div>EG ELECTRO GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>
FELT/WRAP	<div>50 TACKER STAPLE</div> <div>A11 TACKER STAPLE</div> <div>A19 TACKER STAPLE</div> <div>SHCR TACKER STAPLE</div> <div>STCR TACKER STAPLE</div> <div>EG ELECTRO GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>
FINISH/TRIM	<div>15 GA ANGLED NAIL "DA"-STYLE</div> <div>15 GA ANGLED NAIL "FN"-STYLE</div> <div>16 GA ANGLED NAIL "AF"-STYLE</div> <div>16 GA STRAIGHT NAIL "SF"-STYLE</div> <div>18 GA BRAD NAIL</div> <div>23 GA PIN NAIL</div> <div>EG ELECTRO GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>
FLOORING	<div>FC FLOORING CLEAT</div> <div>EG ELECTRO GALVANIZED</div>

Product availability varies by location.

Collated Fasteners

HUTTIG-GRIP™ & HUTTIG-GUARD™

Huttig-Grip

Collated Fasteners

Roofing 90

Framing 91

Framing-Metal Connectors 97

Framing-Pallets/Crates 98

Siding/Fence 100

Staples

Wide Crown 102

Medium Crown 103

Narrow Crown 104

Tackers 105

Finish & Trim

Finish 107

Flooring Cleats 111

Huttig-Guard Stainless Steel

Collated Fasteners

Stainless Steel Roofing 113

Stainless Steel Framing 114

Stainless Steel Siding/Fence 114

Staples

Medium Crown 116

Narrow Crown 116

Tackers 116

Finish & Trim

Finish & Trim 118

Brads 120

Specialty Programs

Tub Program 123

Box Program 125

Clamshell Program 127

!


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

HUTTIG-GRIP™

Roofing, Framing, Siding Nails

HOW TO READ THE ITEM NUMBER

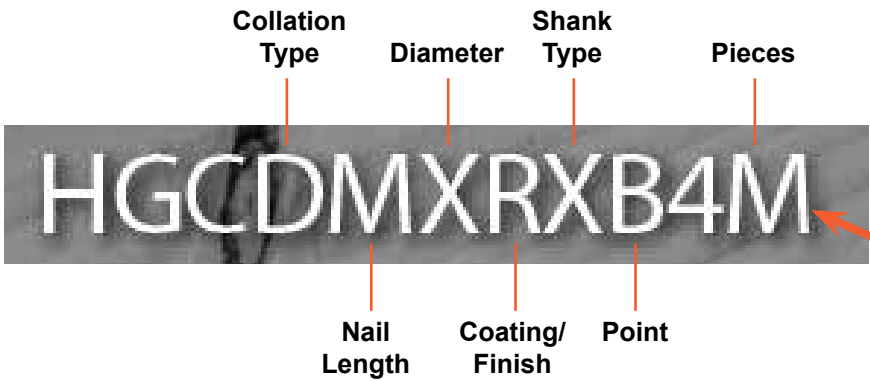

Collation Type	Code	Nail Length	Code	Shank Diameter	Code	Coating / Finish / Properties	Code	Shank Type	Code	Point	Code	Pieces	Code
0° Plastic Sheet	A	1"	A	.135"	O	HG Heat Treated	N	Ring	W	Standard	B	1,000	1M
15° Plastic Sheet	B	1-1/4"	B	.080"	P	Bright High Carbon	O	Smooth	X	Blunt Chisel	C	2,000	2M
15° Wire	C	1-1/2"	C	.083"	Q	HG High Carbon	P	Spiral	Y	Blunt Diamond	D	2,500	25M
21° Plastic	D	1-3/4"	D	.086"	R	Bright Heat Treated	Q	Screw	Z			3,000	3M
28° Plastic	E	1-7/8"	E	.090"	S	Bright	R					4,000	4M
28° CH Wire	F	2"	F	.092"	T	EG – Electro Galvanized	S					5,000	5M
28° RH Wire	G	2-1/8"	G	.099"	U	HG – Hot Galvanized	T						
30° CH Paper	I	2-1/4"	H	.113"	V	304 Stainless Steel	U						
30° Paper Joist	J	2-3/16"	I	.120"	W	316 Stainless Steel	V						
30° RH Paper	L	2-3/8"	J	.131"	X	OG – Outdoor Galvanized	W						
		2-1/2"	K	.148"	Y								
		2-3/4"	L	.162"	Z								
		3"	M										
		3-1/4"	N										
		3-3/8"	O										
		3-1/2"	P										



HUTTIG-GRIP™

ROOFING



Coil Roofing Nails

Available Finishes



Length	Shank Diameter	Shank	Tub 840 Piece	Box 7,200 Piece
ELECTRO GALVANIZED				
3/4"	.120"	Smooth	—	HGC34EGCRFG
7/8"	.120"	Smooth	HGC78EGCRFGT	HGC78EGCRFG
1"	.120"	Smooth	HGC1EGCRFGT	HGC1EGCRFG
1-1/4"	.120"	Smooth	HGC114EGCRFGT	HGC114EGCRFG
1-1/2"	.120"	Smooth	HGC112EGCRFGT	HGC112EGCRFG
1-3/4"	.120"	Smooth	HGC134EGCRFGT	HGC134EGCRFG
3/4"	.120"	Ring	—	HGC34EGRCRFG
1"	.120"	Ring	—	HGC1EGRCRFG
1-1/4"	.120"	Ring	—	HGC114EGRCRFG
1-1/2"	.120"	Ring	—	HGC112EGRCRFG
1-3/4"	.120"	Ring	—	HGC134EGRCRFG
HOT GALVANIZED				
3/4"	.120"	Smooth	—	HGC34HGCRFG
1"	.120"	Smooth	—	HGC1HGCRFG
1-1/4"	.120"	Smooth	—	HGC114HGCRFG
1-1/2"	.120"	Smooth	—	HGC112HGCRFG
1-3/4"	.120"	Smooth	—	HGC134HGCRFG
1-1/4"	.120"	Ring	—	HGC114HGRCRFG
1-3/4"	.120"	Ring	—	HGC134HGRCRFG





21° Plastic Strip Round Head

Available Finishes



Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 5,000 Piece
BRIGHT						
2"	.113"	Smooth	HGCDFVRXB1M	—	—	HGCDFVRXB5M
2-1/4"	.148"	Smooth	HGCDHYRXB1M	—	HGCDHYRXB4M	—
2-3/8"	.113"	Smooth	HGCDJVRXB1M	—	—	HGCDJVRXB5M
2-3/8"	.148"	Smooth	HGCDJYRXB1M	—	HGCDJYRXB4M	—
2-1/2"	.131"	Smooth	HGCDKXRXB1M	—	HGCDKXRXB4M	HGCDKXRXB5M
2-1/2"	.148"	Smooth	HGCDKXRXB1M	—	HGCDKXRXB4M	HGCDKXRXB5M
3"	.120"	Smooth	HGCDMWTWB1M	—	HGCDMWRXB4M	—
3"	.131"	Smooth	HGCDMXRXB1M	—	HGCDMXRXB4M	—
3-1/4"	.131"	Smooth	HGCDNXRXB1M	—	HGCDNXRXB4M	—
3-1/4"	.148"	Smooth	HGCDNYRXB1M	HGCDNYRXB3M	—	—
3-1/4"	.162"	Smooth	HGCDNYRXB1M	HGCDNYRXB3M	—	—
3-1/2"	.162"	Smooth	—	HGCDPZRXB3M	—	—
2-3/8"	.131"	Ring	—	—	—	HGCDJVRWB5M
2-3/8"	.148"	Ring	—	—	—	HGCDJVRWB5M
2-3/8"	.162"	Ring	—	—	—	HGCDJVRWB5M
2-1/2"	.131"	Ring	—	—	—	HGCDKXRWB5M
2-3/8"	.113"	Screw	—	—	—	HGCDJVRZB5M
2-3/8"	.148"	Screw	—	—	HGCDJYRZB4M	—
3"	.120"	Screw	—	—	HGCDMWRZB4M	—
3"	.131"	Screw	—	—	HGCDMXRZB4M	—
3-1/4"	.148"	Screw	—	—	HGCDNYRZB4M	—
ELECTRO GALVANIZED						
2"	.113"	Smooth	—	—	—	HGCDFVSXB5M
2-3/8"	.113"	Smooth	—	—	—	HGCDJVSXB5M
2-1/2"	.131"	Smooth	—	—	—	HGCDKXSXB5M
3"	.120"	Smooth	—	—	HGCDMWSXB4M	—
3"	.131"	Smooth	—	—	HGCDMXSXB4M	—
3-1/4"	.131"	Smooth	—	—	HGCDNXSXB4M	—
3-1/2"	.120"	Smooth	—	—	HGCDPXSXB4M	—
2"	.113"	Ring	—	—	—	HGCDFVSWB5M
2-3/8"	.113"	Ring	—	—	—	HGCDJVSWB5M
3"	.131"	Ring	—	—	HGCDMXSWB4M	—



21° Plastic Strip Round Head - continued

Available Finishes



Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 5,000 Piece
HOT GALVANIZED								
1-1/2"	.148"	Smooth	---	—	—	—	—	HGCDCYTXB5M
2"	.113"	Smooth	HGCDFVTXB1M	—	—	—	—	HGCDFVTXB5M
2-1/4"	.148"	Smooth	HGCDHYTXB1M	—	—	—	HGCDHYTXB4M	—
2-3/8"	.113"	Smooth	HGCDJVTXB1M	—	—	—	—	HGCDJVTXB5M
2-3/8"	.148"	Smooth	HGCDJYTXB1M	—	—	—	HGCDJYTXB4M	---
2-1/2"	.131"	Smooth	HGCDKXTXB1M	—	—	—	HGCDKXTXB4M	HGCDKXTXB5M
2-1/2"	.148"	Smooth	---	—	—	—	HGCDKYTXB4M	—
3"	.120"	Smooth	---	—	—	—	HGCDMWTXB4M	—
3"	.131"	Smooth	HGCDMXTXB1M	—	—	—	HGCDMXTXB4M	—
3"	.148"	Smooth	HGCDMYTXB1M	—	—	—	HGCDMYTXB4M	—
3-1/4"	.120"	Smooth	HGCDNWTXB1M	—	—	—	HGCDNWTXB4M	—
3-1/4"	.131"	Smooth	HGCDNXTXB1M	HGCDNXTXB2M	—	—	HGCDNXTXB4M	—
3-1/4"	.148"	Smooth	HGCDNYTXB1M	—	—	HGCDNYTXB3M	HGCDNXTXB4M	—
3-3/8"	.131"	Smooth	---	—	—	—	HGCDOXTXB4M	—
3-1/2"	.131"	Smooth	HGCDPXTXB1M	—	—	—	HGCDPXTXB4M	—
3-1/2"	.162"	Smooth	---	—	HGCDPZTXB25M	HGCDPZTXB3M	—	—
2"	.113"	Ring	HGCDFVTWB1M	—	—	—	---	HGCDFVTWB5M
2-3/8"	.113"	Ring	HGCDJVTWB1M	HGCDJVTWB2M	HGCDJVTWB25M	—	---	HGCDJVTWB5M
2-3/8"	.120"	Ring	---	—	—	—	---	HGCDJVTWB5M
2-1/2"	.131"	Ring	---	—	—	—	HGCDKXTWB4M	HGCDKXTWB5M
3"	.120"	Ring	HGCDMWTWB1M	HGCDMWTWB2M	—	—	HGCDMWTWB4M	---
3"	.131"	Ring	HGCDMXTWB1M	—	—	—	HGCDMXTWB4M	---
3-1/4"	.131"	Ring	—	—	—	—	HGCDNXTWB4M	---
2-3/8"	.113"	Screw	---	—	—	—	—	—
2-3/8"	.148"	Screw	---	—	—	—	HGCDJYTZB4M	—
2-1/2"	.131"	Screw	---	—	—	—	HGCDKXTZB4M	—
3"	.120"	Screw	HGCDMWTZB1M	—	—	—	HGCDMWTZB4M	—
3"	.131"	Screw	---	—	—	—	HGCDMXTZB4M	—
3-1/4"	.120"	Screw	---	HGCDNWTZB2M	—	—	HGCDNWTZB4M	—
3-1/4"	.131"	Screw	---	—	—	—	HGCDNXTZB4M	—
OUTDOOR GALVANIZED								
2"	.113"	Smooth	—	—	—	—	---	HGCDFVWXB5M
2-3/8"	.113"	Smooth	—	—	—	—	---	HGCDJVWXB5M
2-1/2"	.131"	Smooth	HGCDKXWXB1M	—	—	—	HGCDKXWXB4M	HGCDKXWXB5M
3"	.120"	Smooth	—	—	—	—	HGCDMWWXB4M	---
3"	.131"	Smooth	HGCDMXWXB1M	—	—	—	HGCDMXWXB4M	---
3-1/4"	.131"	Smooth	HGCDNXWXB1M	—	—	—	HGCDNXWXB4M	---
2"	.113"	Ring	HGCDFVWWB1M	—	—	—	—	HGCDFVWWB5M
2-3/8"	.113"	Ring	—	—	—	—	—	HGCDJVWWB5M
3"	.120"	Ring	HGCDMWWWB1M	—	—	—	—	—
3-1/4"	.131"	Ring	HGCDNXWWB1M	—	—	—	HGCDNXWWB4M	—
3"	.131"	Screw	—	—	—	—	HGCDMXWZB4M	—

Product availability varies by location.

Product availability varies by location.



21° Plastic Strip Round Head

Available Finishes

OG
OUTDOOR
GALVANIZED

HG
HOT
GALVANIZED

EG
ELECTRO
GALVANIZED

BRT
BRIGHT

Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 5,000 Piece
OUTDOOR GALVANIZED								
2"	.113"	Smooth	—	—	—	—	---	HGCDVFWXB5M
2-3/8"	.113"	Smooth	—	—	—	—	---	HGCDJVWXB5M
2-1/2"	.131"	Smooth	HGCDKXWXB1M	—	—	—	HGCDKXWXB4M	HGCDKXWXB5M
3"	.120"	Smooth	—	—	—	—	HGCDMWWXB4M	---
3"	.131"	Smooth	HGCDMXWXB1M	—	—	—	HGCDMXWXB4M	---
3-1/4"	.131"	Smooth	HGCDNXWXB1M	—	—	—	HGCDNXWXB4M	---
2"	.113"	Ring	HGCDVFWWB1M	—	—	—	—	HGCDVFWWB5M
2-3/8"	.113"	Ring	—	—	—	—	—	HGCDJVWWB5M
3"	.120"	Ring	HGCDMWWWB1M	—	—	—	—	—
3-1/4"	.131"	Ring	HGCDNXWWB1M	—	—	—	HGCDNXWWB4M	—
3"	.131"	Screw	—	—	—	—	HGCDMXWZB4M	—



Product availability varies by location.



28° Wire Weld Offset Round Head


Available Finishes

BRT
BRIGHT

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED

Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece
BRIGHT					
2"	.113"	Smooth	—	—	HGCGFVRXB25M
2-3/8"	.113"	Smooth	—	—	HGCGJVRXB25M
2-3/8"	.120"	Smooth	—	—	HGCGJWRXB25M
3"	.120"	Smooth	—	HGCGMWRXB2M	—
3"	.131"	Smooth	—	HGCGMXRXB2M	—
3-1/4"	.120"	Smooth	—	HGCGNWRXB2M	—
3-1/4"	.131"	Smooth	HGCGNXRXB1M	HGCGNXRXB2M	—
3-1/2"	.131"	Smooth	HGCGPXRXB1M	HGCGPXRXB2M	—
2"	.113"	Ring	—	—	HGCGFVRWB25M
2-3/8"	.113"	Ring	HGCGJVRWB1M	—	HGCGJVRWB25M
2-3/8"	.113"	Ring	—	—	HGCGJWRWB25M
HOT GALVANIZED					
2"	.113"	Smooth	—	—	HGCGFVTXB25M
3-1/4"	.120"	Smooth	—	HGCGNWTXB2M	—
3-1/2"	.131"	Smooth	—	HGCGPXTXB2M	—
2"	.113"	Ring	—	—	HGCGFVTWB25M
2-3/8"	.120"	Ring	HGCGJVTWB1M	---	HGCGJVTWB25M
OUTDOOR GALVANIZED					
2"	.113"	Smooth	—	—	HGCGFVWXB25M
2-3/8"	.113"	Smooth	—	—	HGCGJVWXB25M
3"	.120"	Smooth	HGCGMWWXB1M	HGCGMWWXB2M	—
3-1/4"	.131"	Smooth	HGCGNXWXB1M	HGCGNXWXB2M	—
2"	.113"	Ring	—	—	HGCGFVWWB25M
2-3/8"	.113"	Ring	HGCGJVWWB1M	—	HGCGJVWWB25M
3"	.120"	Ring	—	HGCGMWWWB2M	—

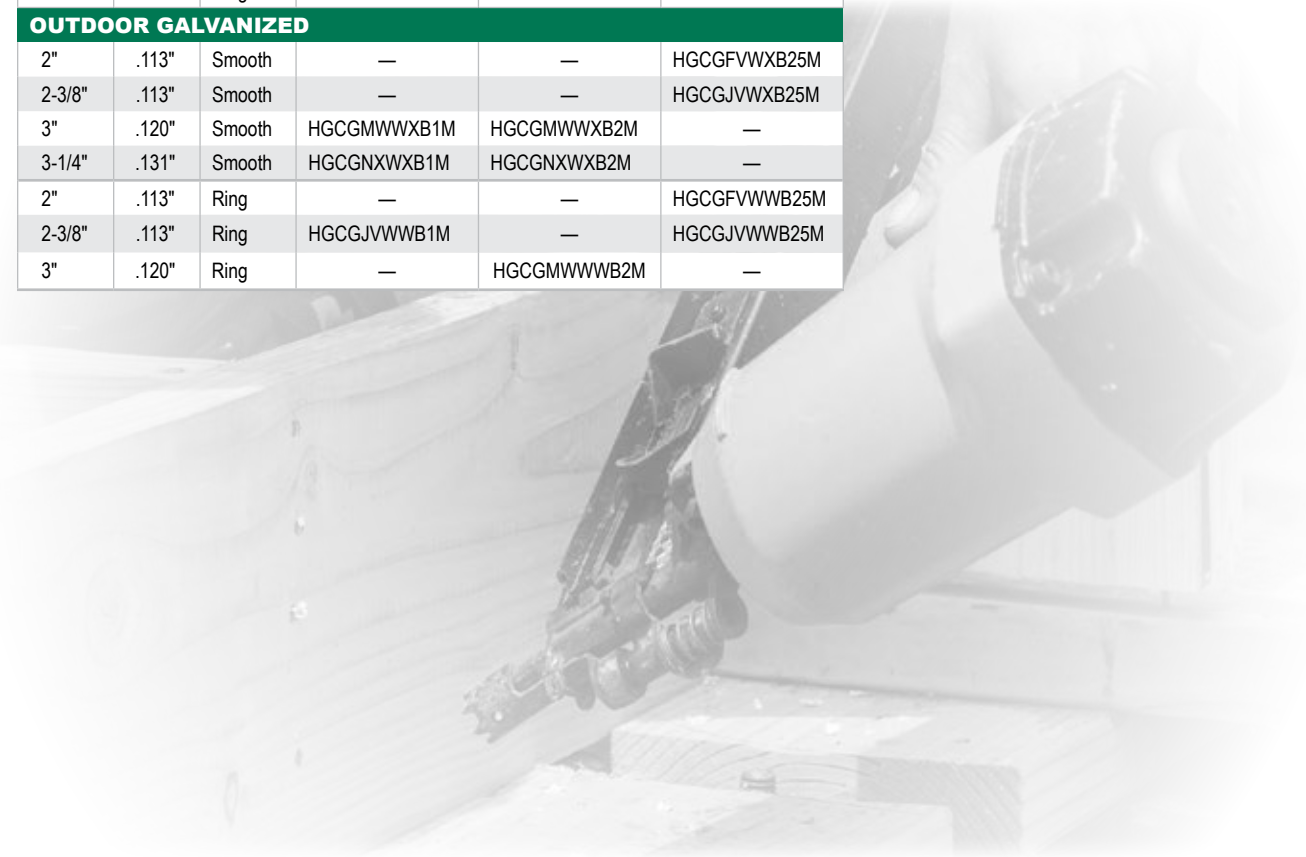

Product availability varies by location.



30° Paper Tape Clipped Head

Available Finishes



Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 5,000 Piece
BRIGHT						
2"	.113"	Smooth	HGCI FVRXB1M	—	HGCI FVRXB25M	—
2-3/8"	.120"	Smooth	HGCI JVRXB1M	—	HGCI JVRXB25M	HGCI JVRXB5M
3"	.120"	Smooth	HGCI MWRXB1M	HGCI MWRXB2M	HGCI MWRXB25M	—
3"	.131"	Smooth	HGCI MXRXB1M	HGCI MXRXB2M	HGCI MXRXB25M	—
3-1/4"	.120"	Smooth	HGCI NWRXB1M	—	HGCI NWRXB25M	—
3-1/4"	.131"	Smooth	HGCI NXRXB1M	HGCI NXRXB2M	HGCI NXRXB25M	—
3-1/2"	.131"	Smooth	—	HGCI PXRXB2M	—	—
2"	.113"	Ring	—	—	HGCI FVRWB25M	—
2-3/8"	.113"	Ring	HGCI JVRWB1M	—	HGCI JVRWB25M	—
3"	.120"	Ring	—	HGCI MWRWB2M	—	—
HOT GALVANIZED						
2"	.113"	Smooth	—	—	HGCI FVTXB25M	—
2-3/8"	.113"	Smooth	—	—	HGCI JVTXB25M	—
3"	.120"	Smooth	—	HGCI MWTXB2M	—	—
3"	.131"	Smooth	—	HGCI MXTXB2M	—	—
3-1/4"	.131"	Smooth	—	HGCI NXTXB2M	—	—
2"	.113"	Ring	HGCI FVTWB1M	—	HGCI FVTWB25M	—
2-3/8"	.113"	Ring	HGCI JVTWB1M	—	HGCI JVTWB25M	—
3"	.120"	Ring	HGCI MWTWB1M	HGCI MWTWB2M	HGCI MWWWB25M	—
3-1/4"	.120"	Ring	—	HGCI NWTWB2M	—	—
OUTDOOR GALVANIZED						
2"	.113"	Smooth	—	—	HGCI FVWXB25M	—
2-3/8"	.113"	Smooth	—	—	HGCI JVWXB25M	—
3"	.120"	Smooth	—	HGCI MWXB2M	—	—
3-1/4"	.131"	Smooth	—	HGCI NXWB2M	HGCI NXWB25M	—
2"	.113"	Ring	—	—	HGCI FVWWB25M	—
2-3/8"	.113"	Ring	—	—	HGCI JVWWB25M	—
3"	.120"	Ring	—	HGCI MWWWB2M	HGCI MWWWB25M	—
3-1/4"	.120"	Ring	—	HGCI NWWWB2M	—	—



30° Paper Tape Offset Round Head

Available Finishes



Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 5,000 Piece
BRIGHT						
2"	.113"	Smooth	—	—	HGCL FVRXB25M	—
2-3/8"	.113"	Smooth	—	—	HGCL JVRXB25M	—
3"	.120"	Smooth	HGCL MWRXB1M	HGCL MWRXB2M	HGCL MWRXB25M	—
3"	.131"	Smooth	HGCL MXRXB1M	HGCL MXRXB2M	HGCL MXRXB25M	—
3-1/4"	.120"	Smooth	—	HGCL NWRXB2M	—	—
3-1/4"	.131"	Smooth	—	HGCL NXRXB2M	—	—
3-1/2"	.131"	Smooth	—	HGCL PXRXB2M	—	—
2-3/8"	.113"	Ring	HGCL JVRWB1M	—	HGCL JVRWB25M	HGCL JVRWB5M
HOT GALVANIZED						
3"	.131"	Smooth	—	HGCL MXTXB2M	HGCL MXTXB25M	—
3-1/4"	.131"	Smooth	HGCL NXTXB1M	HGCL NXTXB2M	HGCL NXTXB25M	—
3-1/2"	.131"	Smooth	—	HGCL PXTXB2M	—	—
2"	.113"	Ring	—	—	HGCL FVTWB25M	—
2-3/8"	.113"	Ring	HGCL JVTWB1M	—	HGCL JVTWB25M	—
3"	.120"	Ring	HGCL MWTWB1M	—	HGCL MWTWB25M	—
3-1/4"	.120"	Ring	—	HGCL NWTWB2M	—	—
3-1/4"	.131"	Ring	—	HGCL NXTWB2M	—	—
OUTDOOR GALVANIZED						
3"	.131"	Smooth	—	HGCL NXWB2M	—	—
2"	.113"	Ring	—	—	HGCL JVWWB25M	—



Product availability varies by location.

Product availability varies by location.



30° Paper Tape Joist Hanger Nail



Available Finishes

BRT
BRIGHT

EG
ELECTRO
GALVANIZED

HG
HOT
GALVANIZED

Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece
BRIGHT - HARDENED							
1-1/2"	.131"	Smooth	HGCJCXRXB1M	—	—	—	HGCJCXRXB4M
1-1/2"	.148"	Smooth	HGCJKXRXB1M	—	—	HGCJCYRXB3M	—
2-1/2"	.131"	Smooth	HGCJCYRXB1M	—	HGCJKXRXB25M	—	—
2-1/2"	.148"	Smooth	HGCJKYRXB1M	—	HGCJKYRXB25M	—	—
2-1/2"	.162"	Smooth	HGCJKZRXB1M	HGCJKZRXB2M	—	—	—
ELECTRO GALVANIZED - HARDENED							
1-1/2"	.131"	Smooth	—	—	—	—	HGCJCXSXB4M
HOT GALVANIZED - HARDENED							
1-1/2"	.131"	Smooth	HGCJCXTXB1M	—	—	—	HGCJCXTXB4M
1-1/2"	.148"	Smooth	HGCJCYTXB1M	—	—	HGCJCYTXB3M	—
2-1/2"	.131"	Smooth	—	—	HGCJKXTXB25M	—	—
2-1/2"	.148"	Smooth	HGCJKYTXB1M	—	HGCJKYTXB25M	—	—
2-1/2"	.162"	Smooth	—	HGCJKZTXB2M	—	—	—

Product availability varies by location.



15° Wire Coil

Available Finishes

BRT
BRIGHT

EG
ELECTRO
GALVANIZED

HG
HOT
GALVANIZED

OG
OUTDOOR
GALVANIZED



Length	Shank Diameter	Shank	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 4,500 Piece	Box 5,000 Piece
BRIGHT							
2"	.113"	Smooth	—	HGCCFVRXB3M	—	—	HGCCFVRXB5M
2-3/8"	.113"	Smooth	—	HGCCJVRXB3M	—	—	HGCCJVRXB5M
2-1/2"	.131"	Smooth	—	HGCCCKRXB3M	—	HGCCCKRXB45M	—
3"	.120"	Smooth	HGCCMWRXB25M	—	HGCCMWRXB4M	HGCCMWRXB45M	—
3"	.131"	Smooth	HGCCMXRXB25M	—	HGCCMXRXB4M	HGCCMXRXB45M	—
3-1/4"	.120"	Smooth	HGCCNWRXB25M	—	HGCCNWRXB4M	—	—
3-1/4"	.131"	Smooth	HGCCNXRXB25M	—	—	HGCCNXRXB45M	—
3-1/2"	.131"	Smooth	—	—	HGCCPXRXB4M	—	—
2"	.113"	Ring	—	—	—	—	HGCCFVRWB5M
2-3/8"	.113"	Ring	—	HGCCJVWB3M	HGCCJVWB4M	HGCCJVWB45M	HGCCJVWB5M
2-1/2"	.131"	Ring	—	—	—	HGCCKXRB45M	—
3"	.131"	Ring	—	—	—	HGCCMWRWB45M	—
ELECTRO GALVANIZED							
3-1/4"	.131"	Smooth	—	—	—	HGCCNXSB45M	—
2-3/8"	.113"	Ring	—	—	—	—	HGCCJVSWB5M
2-1/2"	.131"	Ring	—	—	—	HGCCKXSWB45M	—
3"	.120"	Ring	—	—	—	HGCCMWSWB45M	—
3"	.131"	Ring	—	—	—	HGCCMXSWB45M	—
3-1/4"	.120"	Ring	—	—	—	—	—
3-1/4"	.131"	Ring	—	—	—	HGCCNXSWB45M	—
HOT GALVANIZED							
2-3/8"	.113"	Smooth	—	HGCCJVTXB3M	—	—	—
2-1/2"	.131"	Smooth	—	HGCCKXTXB3M	—	HGCCKXTXB45M	—
3"	.120"	Smooth	HGCCMWTXB25M	—	—	HGCCMWTXB45M	—
3"	.131"	Smooth	HGCCMXTXB25M	—	HGCCMXTXB4M	—	—
3-1/4"	.120"	Smooth	HGCCNWTXB25M	—	HGCCNWTXB4M	—	—
3-1/4"	.131"	Smooth	HGCCNXTXB25M	—	—	—	—
3-1/2"	.131"	Smooth	—	—	HGCCPXTXB4M	—	—
2-3/8"	.113"	Ring	—	HGCCJVTWB3M	—	—	HGCCJVTWB5M
2-1/2"	.131"	Ring	—	—	—	HGCCKXTWB45M	—
3"	.120"	Ring	—	—	—	HGCCMWTWB45M	—
3-1/4"	.120"	Ring	HGCCNWTWB25M	—	—	—	—
OUTDOOR GALVANIZED							
2"	.113"	Smooth	—	HGCCFVWXB3M	—	—	—
2-3/8"	.113"	Smooth	—	HGCCJVWXB3M	—	—	—
2-1/2"	.131"	Smooth	—	HGCCCKWXB3M	—	—	—
3"	.131"	Smooth	HGCCMXWXB25M	—	—	—	—
3-1/4"	.131"	Smooth	HGCCNXWXB25M	—	—	—	—
2"	.113"	Ring	—	HGCCFVWWB3M	—	—	—
2-3/8"	.113"	Ring	—	HGCCJVWWB3M	—	—	—
3"	.120"	Screw	—	—	HGCCMWWB4M	—	—

Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



15° Wire Coil - Pallets/Crates

Available Finishes

- BRT
BRIGHT
- EG
ELECTRO
GALVANIZED
- HG
HOT
GALVANIZED
- OG
OUTDOOR
GALVANIZED

Length	Shank Diameter	Shank	Point	Box 3,000 Piece	Box 4,500 Piece	Box 9,000 Piece
BRIGHT						
2"	.099"	Smooth	Standard	HGCCFURXB3M	—	—
2-3/8"	.099"	Smooth	Standard	HGCCJURXB3M	—	—
2"	.099"	Ring	Standard	HGCCFURWB3M	—	—
2-3/8"	.099"	Ring	Standard	HGCCJURWB3M	—	—
1-3/4"	.099"	Screw	Blunt Diamond Point	—	—	HGCCDURZD9M
2"	.099"	Screw	Blunt Diamond Point	—	—	HGCCFURZD9M
2-1/4"	.099"	Screw	Blunt Diamond Point	—	—	HGCCHURZD9M
BRIGHT - HEAT TREATED						
1-1/2"	.113"	Smooth	Standard	—	HGCCCVQXB45M	—
2-1/4"	.099"	Smooth	Standard	—	—	HGCCHUQXB9M
2-1/4"	.113"	Smooth	Standard	—	HGCCHVQXB45M	—
ELECTRO GALVANIZED						
2"	.099"	Ring	Standard	—	—	HGCCFUSWB9M
2-1/2"	.099"	Ring	Standard	—	—	HGCCKUSWB9M
HOT GALVANIZED						
2-3/8"	.099"	Smooth	Standard	HGCCJUTXB3M	—	—
2"	.099"	Ring	Standard	HGCCFUTWB3M	—	—
2-3/8"	.099"	Ring	Standard	HGCCJUTWB3M	—	—
OUTDOOR GALVANIZED						
2"	.099"	Ring	Standard	HGCCFUWWB3M	—	—



15° Wire Weld - Siding/Fence

Available Finishes

- EG
ELECTRO
GALVANIZED
- HG
HOT
GALVANIZED



Length	Shank Diameter	Shank	Tub 1,200 Piece	Box 3,000 Piece	Box 3,600 Piece
ELECTRO GALVANIZED					
2-3/16"	.092"	Smooth	—	HGCCITSXB36M	—
1-3/4"	.092"	Ring	—	—	HGCCDTSWB9M
2"	.092"	Ring	—	HGCCFTSWB36M	—
HOT GALVANIZED					
2"	.092"	Smooth	—	HGCCFTTXB36M	—
2-3/16"	.092"	Smooth	HGCCITTXB12M	HGCCITTXB36M	—
2-1/2"	.092"	Smooth	—	HGCCKTTXB36M	—
1-1/4"	.092"	Ring	—	HGCCBTTWB36M	—
1-1/2"	.092"	Ring	—	HGCCCTTWB36M	—
1-3/4"	.080"	Ring	—	HGCCDPTWB36M	—
1-3/4"	.092"	Ring	HGCCDTTWB12M	HGCCDTTWB36M	—
2"	.086"	Ring	—	HGCCFRTWB36M	—
2"	.092"	Ring	HGCCFTTWB12M	HGCCFTTWB36M	—
2-3/16"	.092"	Ring	HGCCITTWB12M	HGCCITTWB36M	—
2-1/4"	.092"	Ring	—	HGCCHTTWB36M	—
2-1/2"	.092"	Ring	—	HGCCKTTWB36M	—



CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS


COLLATED FASTENERS

Product availability varies by location.

Product availability varies by location.

HUTTIG-GRIP™ Collated Staples

HOW TO READ THE ITEM NUMBER

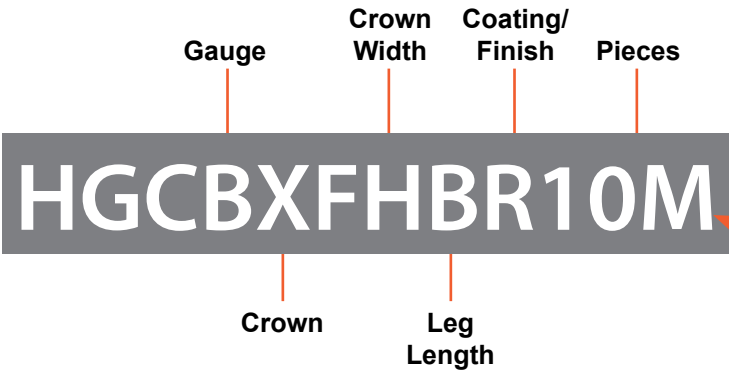


WIDE, MEDIUM, NARROW CROWN STAPLES	Gauge	Code	Crown	Code	Style	Code	Crown Width	Code	Leg Length	Code	Coating / Finish	Code	Piece	Code
	18	A	Narrow	W	"L"-Style	A	7/32"	D	1/4"	Q	EG – Electro Galvanized	R	1,000	1M
	16	B	Medium	X	"SX"-Style	B	1/4"	E	5/16"	P	HG – Hot Galvanized	S	2,000	2M
	15-1/2	C	Wide	Y	"N"-Style	C	3/8"	F	3/8"	O	304 Stainless Steel	T	2,500	25M
	20	D	Tacker	Z	"76"-Style	D	7/16"	G	1/2"	N	316 Stainless Steel	U	3,000	3M
	23	E			"GS"-Style	E	1/2"	H	9/16"	M	OG – Outdoor Galvanized	V	4,000	4M
	14	F			"BCS"-Style	F	15/16"	I	5/8"	L			5,000	5M
					"GSW"-Style	G	1"	J	3/4"	K				
					"P"-Style	H			7/8"	J				
					"A11"-Style Tacker	L			1"	I				
					"50"-Style Tacker	N			1-1/4"	F				
					"A19"-Style Tacker	O			1-3/8"	E				
					"STCR"-Style	P			1-1/2"	D				
					"SHCR"-Style	Q			1-3/4"	C				
									2"	B				
									2-1/4"	A				

HUTTIG-GRIP™

WIDE CROWN STAPLES



"BCS"-Style



Available Finish



Crown	Leg	Gauge	Box 10,000 Piece
ELECTRO GALVANIZED			
1"	3/4"	16	HGCBYFJKR10M
1"	7/8"	16	HGCBYFJJR10M
1"	1"	16	HGCBYFJIR10M
1"	1-1/4"	16	HGCBYFJFR10M
1"	1-1/2"	16	HGCBYFJDR10M
1"	1-3/4"	16	HGCBYFJCR10M



"GSW"-Style



Available Finish



Crown	Leg	Gauge	Box 10,000 Piece
ELECTRO GALVANIZED			
15/16"	5/8"	16	HGCBYGILR10M
15/16"	7/8"	16	HGCBYGJIR10M
15/16"	1"	16	HGCBYGIIIR10M
15/16"	1-1/4"	16	HGCBYGIFR10M
15/16"	1-1/2"	16	HGCBYGIDR10M
15/16"	1-3/4"	16	HGCBYGICR10M
15/16"	2"	16	HGCBYGIBR10M



"P"-Style



Available Finish



Crown	Leg	Gauge	Box 10,000 Piece
ELECTRO GALVANIZED			
1"	5/8"	16	HGCBYHJLR10M
1"	3/4"	16	HGCBYHJKR10M
1"	7/8"	16	HGCBYHJJR10M
1"	1"	16	HGCBYHJIR10M
1"	1-1/4"	16	HGCBYHJFR10M
1"	1-1/2"	16	HGCBYHJDR10M
1"	1-3/4"	16	HGCBYHJCR10M
1"	2"	16	HGCBYHJBR10M

MEDIUM CROWN STAPLES

HUTTIG-GRIP™

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



"BCS"-Style



Available Finish
EG
ELECTRO GALVANIZED

Crown	Leg	Gauge	Box 10,000 Piece
ELECTRO GALVANIZED			
1/2"	1-1/2"	16	HGCBXFHDR10M
1/2"	1-3/4"	16	HGCBXFHCR10M
1/2"	2"	16	HGCBXFHBR10M



"GS"-Style



Available Finish
EG
ELECTRO GALVANIZED

Crown	Leg	Gauge	Box 10,000 Piece
ELECTRO GALVANIZED			
1/2"	1-1/4"	16	HGCBXEHR10M
1/2"	1-1/2"	16	HGCBXEHDR10M
1/2"	1-3/4"	16	HGCBXEHCR10M
1/2"	2"	16	HGCBXEHBR10M



"N"-Style



Available Finishes
EG
ELECTRO GALVANIZED
LIFETIME STAINLESS
LIMITED WARRANTY

Crown	Leg	Gauge	Box 10,000 Piece
ELECTRO GALVANIZED			
7/16"	1"	16	HGCBXCGIR10M
7/16"	1-1/4"	16	HGCBXCGFR10M
7/16"	1-1/2"	16	HGCBXCGDR10M
7/16"	1-3/4"	16	HGCBXCGCR10M
7/16"	2"	16	HGCBXCGBR10M



"76"-Style



Available Finish
EG
ELECTRO GALVANIZED

Crown	Leg	Gauge	Box 10,000 Piece
ELECTRO GALVANIZED			
7/16"	1-1/4"	16	HGCBXDGFR10M
7/16"	1-1/2"	16	HGCBXDGDR10M
7/16"	1-3/4"	16	HGCBXDGCR10M
7/16"	2"	16	HGCBXDGBR10M

HUTTIG-GRIP™

NARROW CROWN STAPLES

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



"L"-Style




Available Finishes
EG
ELECTRO GALVANIZED
LIFETIME STAINLESS
LIMITED WARRANTY

Crown	Leg	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED					
1/4"	5/8"	HGCAWAELR5M	6	HGCAWAELR1M	10
1/4"	3/4"	HGCAWAEKR5M	6	HGCAWAEKR1M	10
1/4"	7/8"	HGCAWAEJR5M	6	HGCAWAEJR1M	10
1/4"	1"	HGCAWAEIR5M	6	HGCAWAEIR1M	10
1/4"	1-1/8"	HGCAWAEHR5M	6	HGCAWAEHR1M	10
1/4"	1-1/4"	HGCAWAEFR5M	6	HGCAWAEFR1M	10
1/4"	1-1/2"	HGCAWAEDR5M	6	HGCAWAEDR1M	10



CONSTRUCTION FASTENERS

A11 "A11"-Style



Available Finishes


EG
ELECTRO
GALVANIZED



Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
ELECTRO GALVANIZED				
3/8"	3/8"	20	HGCDZLFOR5M	20

WOOD & EXTERIOR SCREWS

A19 "A19"-Style



Available Finish

EG
ELECTRO
GALVANIZED


Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
ELECTRO GALVANIZED				
3/8"	1/4"	23	HGCEZOFQR5M	20

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



50 "50"-Style




Available Finish

EG
ELECTRO
GALVANIZED

Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
ELECTRO GALVANIZED				
1/2"	5/16"	20	HGCDZNHPR5M	20
1/2"	3/8"	20	HGCDZNHOR5M	20

SHCR "SHCR"-Style



Available Finish

EG
ELECTRO
GALVANIZED

Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
ELECTRO GALVANIZED				
3/8"	1/4"	20	HGCDZQFQR5M	20
3/8"	3/8"	20	HGCDZQFOR5M	20

STCR "STCR"-Style



Available Finish

EG
ELECTRO
GALVANIZED

Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
ELECTRO GALVANIZED				
7/16"	1/4"	20	HGCDZPGQR5M	20
7/16"	3/8"	20	HGCDZPGOR5M	20

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS


COLLATED FASTENERS



HUTTIG-GRIP™

Finish & Trim Fasteners

HOW TO READ THE ITEM NUMBER

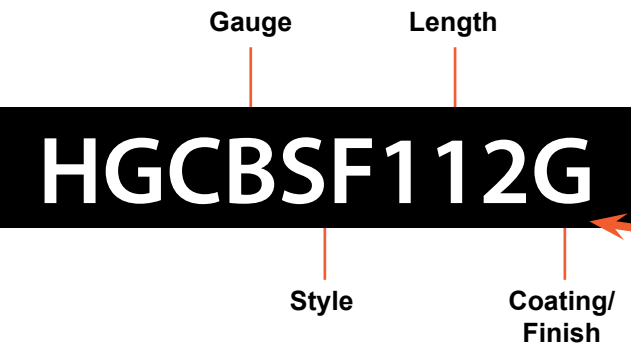

Gauge	Code	Style	Code	Length	Code	Coating / Finish	Code
15	A	"DA"-Style	DA	1/2"	12	Bright	B
16	B	"FN"-Style	FN	9/16"	916	EG – Electro Galvanized	G
18	C	"SF"-Style	SF	5/8"	58	304 Stainless Steel	S4
20	D	"AF"-Style	AF	3/4"	34	316 Stainless Steel	S6
23	E	Brad	BD	7/8"	78		
		Pin	PN	1"	1		
		Cleat	CL	1-1/8"	118		
		etc.					

HUTTIG-GRIP™

FINISH & TRIM NAILS



15 gauge "DA"-Style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
BRIGHT				
1-1/4"	HGCADA114B	4	—	—
1-1/2"	HGCADA112B	4	—	—
1-3/4"	HGCADA134B	4	—	—
2"	HGCADA2B	4	—	—
2-1/4"	HGCADA214B	4	—	—
2-1/2"	HGCADA212B	2	—	—
ELECTRO GALVANIZED				
1-1/4"	HGCADA114G	4	HGCADA114G1M	10
1-1/2"	HGCADA112G	4	HGCADA112G1M	10
1-3/4"	HGCADA134G	4	HGCADA134G1M	10
2"	HGCADA2G	4	HGCADA2G1M	10
2-1/4"	HGCADA214G	2	—	—
2-1/2"	HGCADA212G	2	HGCADA212G1M	10

Available Finishes



15 gauge "FN"-Style Angled Finish Nail

Size	Box 3,650 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED				
1-1/4"	HGCAFN114G	4	HGCAFN114G1M	10
1-1/2"	HGCAFN112G	4	HGCAFN112G1M	10
1-3/4"	HGCAFN134G	4	HGCAFN134G1M	10
2"	HGCAFN2G	4	HGCAFN2G1M	10
2-1/2"	HGCAFN212G	2	HGCAFN212G1M	10

Available Finish





16 gauge "AF"-Style Straight Finish Nail

Size	Box 2,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED				
1"	HGCB AF1G	10	—	—
1-1/4"	HGCB AF114G	10	HGCB AF114G1M	10
1-1/2"	HGCB AF112G	10	HGCB AF112G1M	10
1-3/4"	HGCB AF134G	10	—	—
2"	HGCB AF2G	10	HGCB AF2G1M	10
2-1/2"	HGCB AF212G	8	HGCB AF212G1M	10

Available Finish



16 gauge "SF"-Style Straight Finish Nail

Size	Box 2,500 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED				
3/4"	HGCBSF34G	10	HGCBSF34G1M	10
7/8"	HGCBSF78G	10	HGCBSF78G1M	10
1"	HGCBSF1G	10	HGCBSF1G1M	10
1-1/8"	HGCBSF118G	10	HGCBSF118G1M	10
1-1/4"	HGCBSF114G	10	HGCBSF114G1M	10
1-1/2"	HGCBSF112G	10	HGCBSF112G1M	10
1-3/4"	HGCBSF134G	10	HGCBSF134G1M	10
2"	HGCBSF2G	10	HGCBSF2G1M	10
2-1/4"	HGCBSF214G	8	HGCBSF214G1M	10
2-1/2"	HGCBSF212G	8	HGCBSF212G1M	10

Available Finish



18 gauge Brad Nail

Size	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED				
5/8"	HGCCBD58G	10	HGCCBD58G1M	10
3/4"	HGCCBD34G	10	HGCCBD34G1M	10
1"	HGCCBD1G	10	HGCCBD1G1M	10
1-1/8"	HGCCBD118G	10	HGCCBD118G1M	10
1-3/16"	HGCCBD1316G	10	HGCCBD1316G1M	10
1-1/4"	HGCCBD114G	10	HGCCBD114G1M	10
1-1/2"	HGCCBD112G	10	HGCCBD112G1M	10
1-3/4"	HGCCBD134G	10	HGCCBD134G1M	10
2"	HGCCBD2G	10	HGCCBD2G1M	10

Available Finish



CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



23 gauge Pin Nail

Size	Clamshell 2,000 Piece	Clamshells / master
ELECTRO GALVANIZED		
1/2"	HGCEPN12G2M	10
5/8"	HGCEPN58G2M	10
3/4"	HGCEPN34G2M	10
1"	HGCEPN1G2M	10
1-3/16"	HGCEPN1316G2M	10

Available Finish



"L"-Style Flooring Cleat

Size	Gauge	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED			
1-1/2"	16	HGCBCL112G	5
2"	16	HGCBCL2G	5

Available Finish



CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



HUTTIG-GUARD™ Stainless Steel Collated Fasteners

Recommended for use **outdoors**, with **treated lumber**, and in other **high-corrosive environments**.

Limited Lifetime Fastener Warranty



HOW TO READ THE ITEM NUMBER

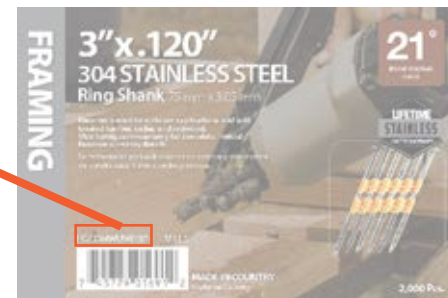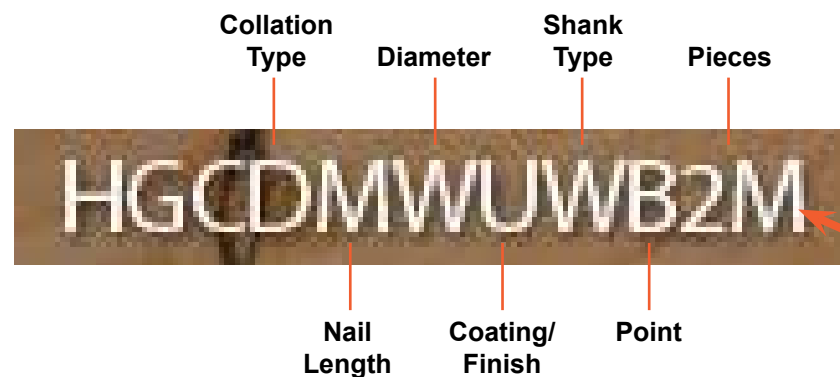

Collation Type	Code	Nail Length	Code	Shank Diameter	Code	Coating / Finish / Properties	Code	Shank Type	Code	Point	Code	Pieces	Code
15° Wire	C	1"	A	.135"	O	304 Stainless Steel	U	Ring	W	Standard	B	1,000	1M
21° Plastic	D	1-1/4"	B	.080"	P	316 Stainless Steel	V	Smooth	X	Blunt Chisel	C	2,000	2M
		1-1/2"	C	.083"	Q			Spiral	Y	Blunt Diamond	D	2,500	25M
		1-3/4"	D	.086"	R			Screw	Z			3,000	3M
		1-7/8"	E	.090"	S							4,000	4M
		2"	F	.092"	T							5,000	5M
		2-1/8"	G	.099"	U								
		2-1/4"	H	.113"	V								
		2-3/16"	I	.120"	W								
		2-3/8"	J	.131"	X								
		2-1/2"	K	.148"	Y								
		2-3/4"	L	.162"	Z								
		3"	M										
		3-1/4"	N										

RF Stainless Steel Coil Roofing Nails

Length	Shank Diameter	Shank	Box 3,600 Piece	Box 7,200 Piece
304 STAINLESS STEEL				
3/4"	.120"	Smooth	—	HGC34SSCRFG
1-1/4"	.120"	Smooth	HGC114SSCRFH	—
1-1/2"	.120"	Smooth	HGC112SSCRFH	HGC112SSCRFG
3/4"	.120"	Ring	HGC34SSRCRFH	—
7/8"	.120"	Ring	HGC78SSRCRFH	—
1"	.120"	Ring	HGC1SSRCRFH	—
1-1/4"	.120"	Ring	HGC114SSRCRFH	HGC114SSRCRFG
1-1/2"	.120"	Ring	HGC112SSRCRFH	HGC112SSRCRFG
1-3/4"	.120"	Ring	HGC134SSRCRFH	HGC134SSRCRFG



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Product availability varies by location.

HUTTIG-GUARD™

ROOFING & FRAMING



Stainless Steel 21° Plastic Strip Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece
304 STAINLESS STEEL				
2"	.113"	Ring	HGCDJVUWB1M	HGCDJVUWB2M
2-3/8"	.113"	Ring	HGCDJVUWB1M	—
2-3/8"	.120"	Ring	HGCDJVUWB1M	HGCDJVUWB2M
2-1/2"	.120"	Ring	—	—
3"	.120"	Ring	HGCDMWUWB1M	HGCDMWUWB2M
3"	.131"	Ring	HGCDMXUWB1M	—
3-1/4"	.120"	Ring	—	HGCDNWUWB2M
3-1/4"	.131"	Ring	HGCDNXUWB1M	HGCDNXUWB2M



Stainless Steel 15° Wire Weld - Framing

Length	Shank Diameter	Shank	Box 2,500 Piece
304 STAINLESS STEEL			
3"	.120"	Smooth	HGCCMWUWB25M



Stainless Steel 15° Wire Weld - Siding/Fence

Length	Shank Diameter	Shank	Tub 1,200 Piece	Box 3,600 Piece
304 STAINLESS STEEL				
1-1/4"	.090"	Ring	HGCCBSUWB12M	HGCCBSUWB36M
1-1/4"	.092"	Ring	—	HGCCBTUWB36M
1-1/2"	.090"	Ring	HGCCCSUWB12M	—
1-1/2"	.092"	Ring	—	HGCCCTUWB36M
1-3/4"	.092"	Ring	HGCCDTUWB12M	HGCCDTUWB36M
2"	.092"	Ring	HGCCFTUWB12M	HGCCFTUWB36M
2-3/16"	.092"	Ring	HGCCITUWB12M	HGCCITUWB36M
2-1/4"	.092"	Ring	—	HGCCHTUWB36M
2-1/2"	.092"	Ring	—	HGCCKTUWB36M
316 STAINLESS STEEL				
2"	.092"	Smooth	—	HGCCFTVXB36M
1-3/4"	.092"	Ring	—	HGCCDTVXB36M
2"	.092"	Ring	—	HGCCFTVXB36M
2-3/16"	.092"	Ring	—	HGCCITVXB36M
2-1/2"	.092"	Ring	—	HGCCKTVXB36M



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Product availability varies by location.


HUTTIG-GUARD™ Stainless Steel Collated Staples

Recommended for use **outdoors**, with **treated lumber**, and in other **high-corrosive environments**.

Limited Lifetime Fastener Warranty



HOW TO READ THE ITEM NUMBER

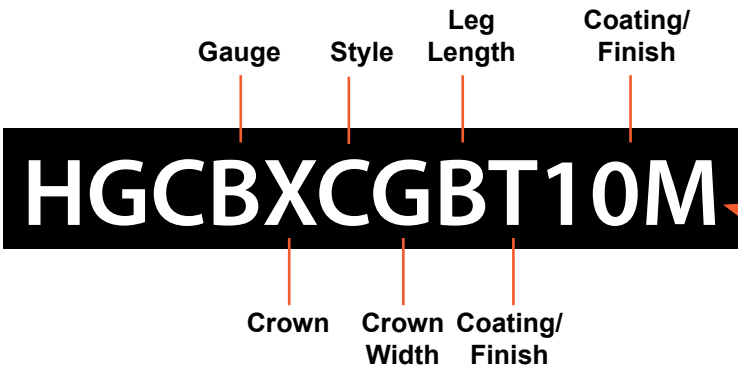

WIDE, MEDIUM, NARROW CROWN STAPLES	Gauge	Code	Crown	Code	Style	Code	Crown Width	Code	Leg Length	Code	Coating / Finish	Code	Piece	Code
	18	A	Narrow	W	"L"-Style	A	7/32"	D	1/4"	Q	304 Stainless Steel	T	1,000	1M
	16	B	Medium	X	"N"-Style	C	1/4"	E	5/16"	P	316 Stainless Steel	U	2,000	2M
	15-1/2	C	Wide	Y	"A11"-Style Tacker	L	3/8"	F	3/8"	O			2,500	25M
	20	D	Tacker	Z			7/16"	G	1/2"	N			3,000	3M
	23	E					1/2"	H	9/16"	M			4,000	4M
	14	F					15/16"	I	5/8"	L			5,000	5M
							1"	J	3/4"	K				
									7/8"	J				
									1"	I				
									1-1/4"	F				
									1-3/8"	E				
									1-1/2"	D				
									1-3/4"	C				
									2"	B				
									2-1/4"	A				

HUTTIG-GUARD™

16 GA Stainless Steel "N"-style Medium Crown Staple

Crown	Leg	Gauge	Box 5,000 Piece
304 STAINLESS STEEL			
7/16"	1-1/4"	16	HGCBXCGFT10M
7/16"	1-1/2"	16	HGCBXCGDT10M
7/16"	1-3/4"	16	HGCBXCGCT10M
7/16"	2"	16	HGCBXCGBT10M



18 GA Stainless Steel "L"-style Narrow Crown Staple

Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 STAINLESS STEEL						
1/4"	1"	18	HGCAWAEIT5M	6	—	—
1/4"	1-1/4"	18	HGCAWAEFT5M	6	HGCAWAEFT1M	5
1/4"	1-1/2"	18	HGCAWAEDT5M	6	HGCAWAEDT1M	5



A11 Stainless Steel "A11"-style Tacker Staple

Crown	Leg	Gauge	Box 5,000 Piece	Boxes / shipper
304 STAINLESS STEEL				
1/4"	3/8"	20	HGCDZLFOT5M	6



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Product availability varies by location.

Product availability varies by location.


HUTTIG-GUARD™ Stainless Steel Finish & Trim Fasteners

Recommended for use **outdoors**, with **treated lumber**, and in other **high-corrosive environments**.

Limited Lifetime Fastener Warranty



HOW TO READ THE ITEM NUMBER

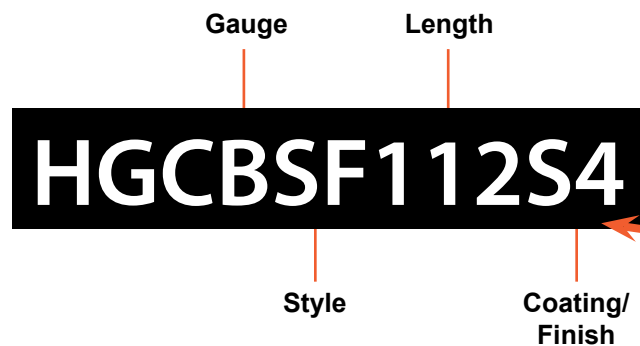

Gauge	Code	Style	Code	Length	Code	Coating / Finish	Code
15	A	"DA"-Style	DA	1/2"	12	304 Stainless Steel	S4
16	B	"FN"-Style	FN	9/16"	916	316 Stainless Steel	S6
18	C	"SF"-Style	SF	5/8"	58		
20	D	"AF"-Style	AF	3/4"	34		
23	E	Brad Pin	BD PN	7/8"	78		
				1"	1		
				1-1/8" etc.	118		

HUTTIG-GUARD™

FINISH NAILS



Stainless Steel 15 gauge "DA"-style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 STAINLESS STEEL				
1-1/2"	HGCADA112S4	2	HGCADA112S41M	5
2"	HGCADA2S4	2	HGCADA2S41M	5
2-1/2"	HGCADA212S4	2	HGCADA212S41M	5
316 STAINLESS STEEL				
1-1/2"	HGCADA112S6	2	HGCADA112S61M	5
2"	HGCADA2S6	2	HGCADA2S61M	5
2-1/2"	HGCADA212S6	2	HGCADA212S61M	5



Stainless Steel 15 gauge "FN"-style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 STAINLESS STEEL				
1-1/2"	HGCAFN112S4	2	HGCAFN112S41M	10
2"	HGCAFN2S4	2	HGCAFN2S41M	10
2-1/2"	HGCAFN212S4	2	HGCAFN212S41M	10
316 STAINLESS STEEL				
1-1/2"	—	—	HGCAFN112S61M	10
2"	—	—	HGCAFN2S61M	10
2-1/2"	—	—	HGCAFN212S61M	10



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Product availability varies by location.

Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS



Stainless Steel 16 gauge "AF"-style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 STAINLESS STEEL				
1-1/2"	HGCBFAF112S4	6	HGCBFAF112S41M	5
2"	HGCBFAF2S4	6	HGCBFAF2S41M	5
2-1/2"	HGCBFAF212S4	6	HGCBFAF212S41M	5
316 STAINLESS STEEL				
2"	HGCBFAF2S6	6	HGCBFAF2S61M	5
2-1/2"	HGCBFAF212S6	6	HGCBFAF212S61M	5



Stainless Steel 16 gauge "SF"-style Straight Finish Nail

Size	Box 2,500 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 STAINLESS STEEL				
1-1/4"	HGCBSF114S4	6	—	—
1-1/2"	HGCBSF112S4	6	HGCBSF112S41M	5
2"	HGCBSF2S4	6	HGCBSF2S41M	5
2-1/2"	HGCBSF212S4	6	HGCBSF212S41M	5
316 STAINLESS STEEL				
1-1/2"	HGCBSF112S6	6	HGCBSF112S61M	5
2"	HGCBSF2S6	6	HGCBSF2S61M	5
2-1/2"	HGCBSF212S6	6	HGCBSF212S61M	5



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Product availability varies by location.



Stainless Steel 18 gauge Brad Nail

Size	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 STAINLESS STEEL				
3/4"	—	—	HGCCBD34S41M	5
1"	HGCCBD1S4	6	HGCCBD1S41M	5
1-1/4"	HGCCBD114S4	6	HGCCBD114S41M	5
1-1/2"	HGCCBD112S4	6	HGCCBD112S41M	5
2"	HGCCBD2S4	6	HGCCBD2S41M	5
316 STAINLESS STEEL				
3/4"	HGCCBD34S6	6	—	—
1"	HGCCBD1S6	6	HGCCBD1S61M	5
1-1/4"	HGCCBD114S6	6	HGCCBD114S61M	5



Lifetime Limited Fastener Warranty. See www.huttig.com/warranty for complete details.

Product availability varies by location.

CONSTRUCTION FASTENERS

WOOD & EXTERIOR SCREWS

DRYWALL & STEEL FRAMING SCREWS

COLLATED FASTENERS

HUTTIG-GRIP™ & HUTTIG-GUARD™ Collated Fasteners

Color coded packaging help guide you to the four main categories by application.

- GENERAL
- OUTDOOR
- ROOFING
- STAINLESS STEEL

Collation icons identify the type of tool that the fasteners are designed to fit.

TYPES/APPLICATIONS		FINISHES	
ROOFING	<div>RF</div> <div>ROOFING NAIL</div>	<div>EG</div> <div>ELECTRO GALVANIZED</div>	
FRAMING	<div>15°</div> <div>COIL NAIL WIRE WELD</div> <div>21°</div> <div>ROUND HEAD NAIL PLASTIC</div> <div>28°</div> <div>WIRE WELD NAIL</div> <div>30°</div> <div>PAPER TAPE NAIL</div>	<div>BRT</div> <div>BRIGHT</div> <div>EG</div> <div>ELECTRO GALVANIZED</div> <div>HG</div> <div>HOT GALVANIZED</div> <div>OG</div> <div>OUTDOOR GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>	
FRAMING	<div>MC</div> <div>METAL CONNECTOR NAIL PAPER</div>	<div>BRT</div> <div>BRIGHT</div> <div>HG</div> <div>HOT GALVANIZED</div>	
SIDING	<div>15°</div> <div>COIL SIDING NAIL WIRE WELD</div>	<div>HG</div> <div>HOT GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>	
FINISH/ TRIM	<div>15 GA</div> <div>ANGLED NAIL</div> <div>"DA"-STYLE</div> <div>15 GA</div> <div>ANGLED NAIL</div> <div>"FN"-STYLE</div> <div>16 GA</div> <div>ANGLED NAIL</div> <div>"AF"-STYLE</div> <div>16 GA</div> <div>STRAIGHT NAIL</div> <div>"SF"-STYLE</div> <div>18 GA</div> <div>BROAD NAIL</div> <div>23 GA</div> <div>PIN NAIL</div>	<div>EG</div> <div>ELECTRO GALVANIZED</div> <div>LIFETIME STAINLESS LIMITED WARRANTY</div>	
FLOORING	<div>FC</div> <div>FLOORING CLASP</div>	<div>EG</div> <div>ELECTRO GALVANIZED</div>	

Collated Fasteners

HUTTIG-GRIP™ & HUTTIG-GUARD™ Specialty Programs - Tub, Box & Clamshell

Tub Program	123
Box Program - Staples, Finish & Trim.....	125
Clamshell Program - Finish & Trim	127

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

TUB PROGRAM

- Convenient job pack quantity
- Contains & protects fasteners
- Clear plastic for fastener visibility
- Recloseable lid
- Easy to stack, easy to store



21° 21° Plastic Strip Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece
BRIGHT			
2"	.113"	Smooth	HGCDFVRXB1M
2-1/4"	.148"	Smooth	HGCDHYRXB1M
2-3/8"	.113"	Smooth	HGCDJVRXB1M
2-3/8"	.148"	Smooth	HGCDJYRXB1M
2-1/2"	.131"	Smooth	HGCDKXXRB1M
2-1/2"	.148"	Smooth	HGCDKXXRB1M
3"	.120"	Smooth	HGCDMWTWB1M
3"	.131"	Smooth	HGCDMXRXB1M
3-1/4"	.131"	Smooth	HGCDNXXRB1M
3-1/4"	.148"	Smooth	HGCDNYRXB1M
3-1/4"	.162"	Smooth	HGCDNYRXB1M
HOT GALVANIZED			
2"	.113"	Smooth	HGCDFVTXB1M
2-1/4"	.148"	Smooth	HGCDHYTXB1M
2-3/8"	.113"	Smooth	HGCDJVTXB1M
2-3/8"	.148"	Smooth	HGCDJYTXB1M
2-1/2"	.131"	Smooth	HGCDKXTXB1M
3"	.131"	Smooth	HGCDMXTXB1M
3"	.148"	Smooth	HGCDMYTXB1M
3-1/4"	.120"	Smooth	HGCDNWTXB1M
3-1/4"	.131"	Smooth	HGCDNXTXB1M
3-1/4"	.148"	Smooth	HGCDNYTXB1M
3-1/2"	.131"	Smooth	HGCDPXTXB1M
2"	.113"	Ring	HGCDFVTWB1M
2-3/8"	.113"	Ring	HGCDJVTWB1M
3"	.120"	Ring	HGCDMWTWB1M
3"	.131"	Ring	HGCDMXTWB1M
3"	.120"	Screw	HGCDMWTZB1M
OUTDOOR GALVANIZED			
2-1/2"	.131"	Smooth	HGCDKXWXB1M
3"	.131"	Smooth	HGCDMXWXB1M
3-1/4"	.131"	Smooth	HGCDNXWXB1M
2"	.113"	Ring	HGCDFVWWB1M
3"	.120"	Ring	HGCDMWWWB1M
3-1/4"	.131"	Ring	HGCDNXWWB1M
304 STAINLESS STEEL			
2-1/2"	.131"	Smooth	HGCDKXWXB1M
3"	.131"	Smooth	HGCDMXWXB1M
3-1/4"	.131"	Smooth	HGCDNXWXB1M
2"	.113"	Ring	HGCDFVWWB1M
3"	.120"	Ring	HGCDMWWWB1M
3-1/4"	.131"	Ring	HGCDNXWWB1M

BRT
BRIGHT

HG
HOT GALVANIZED

OG
OUTDOOR GALVANIZED



28° 28° Wire Weld Offset Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece
BRIGHT			
3-1/4"	.131"	Smooth	HGCGNXRXB1M
3-1/2"	.131"	Smooth	HGCGPXXRB1M
2-3/8"	.113"	Ring	HGCGJVRWB1M
HOT GALVANIZED			
2-3/8"	.120"	Ring	HGCGJTWB1M
OUTDOOR GALVANIZED			
3"	.120"	Smooth	HGCGMWWXB1M
3-1/4"	.131"	Smooth	HGCGNXWXB1M
2-3/8"	.113"	Ring	HGCGJVWXB1M

BRT
BRIGHT

HG
HOT GALVANIZED

OG
OUTDOOR GALVANIZED

30° 30° Paper Tape Clipped Head

Length	Shank Diameter	Shank	Tub 1,000 Piece
BRIGHT			
2"	.113"	Smooth	HGCI FVRXB1M
2-3/8"	.120"	Smooth	HGCIJVRXB1M
3"	.120"	Smooth	HGCI MWRXB1M
3"	.131"	Smooth	HGCI MXRB1M
3-1/4"	.120"	Smooth	HGCI NWRXB1M
3-1/4"	.131"	Smooth	HGCI NXRB1M
2-3/8"	.113"	Ring	HGCIJVRWB1M
HOT GALVANIZED			
2"	.113"	Ring	HGCI FVTWB1M
2-3/8"	.113"	Ring	HGCIJVTWB1M
3"	.120"	Ring	HGCI MWTWB1M

BRT
BRIGHT

HG
HOT GALVANIZED

30° 30° Paper Tape Offset Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece
BRIGHT			
3"	.120"	Smooth	HGCLMWRXB1M
3"	.131"	Smooth	HGCLMXRXB1M
2-3/8"	.113"	Ring	HGCLJVRWB1M
HOT GALVANIZED			
3-1/4"	.131"	Smooth	HGCLNXTXB1M
2-3/8"	.113"	Ring	HGCLJVTWB1M
3"	.120"	Ring	HGCLMWTWB1M

BRT
BRIGHT

HG
HOT GALVANIZED

MC 30° Paper Tape Joist Hanger Nail

Length	Shank Diameter	Shank	Tub 1,000 Piece
BRIGHT			
1-1/2"	.131"	Smooth	HGCJCXRXB1M
1-1/2"	.148"	Smooth	HGCJKXRXB1M
2-1/2"	.131"	Smooth	HGCJCYRXB1M
2-1/2"	.148"	Smooth	HGCJKYRXB1M
2-1/2"	.162"	Smooth	HGCJKZRXB1M
HOT GALVANIZED - HARDENED			
1-1/2"	.131"	Smooth	HGCJCXTXB1M
1-1/2"	.148"	Smooth	HGCJCYTXB1M
2-1/2"	.148"	Smooth	HGCJKYTXB1M

BRT
BRIGHT

HG
HOT GALVANIZED

15° 15° Wire Weld - Siding/Fence

Length	Shank Diameter	Shank	Tub 1,200 Piece
HOT GALVANIZED			
2-3/16"	.092"	Smooth	HGCCITTXB12M
1-3/4"	.092"	Ring	HGCCDTTWB12M
2"	.092"	Ring	HGCCFTTWB12M
2-3/16"	.092"	Ring	HGCCITTWB12M
304 STAINLESS STEEL			
1-1/4"	.090"	Ring	HGCCBSUWB12M
1-1/2"	.090"	Ring	HGCCCSUWB12M
1-3/4"	.092"	Ring	HGCCDTUWB12M
2"	.092"	Ring	HGCCFTUWB12M
2-3/16"	.092"	Ring	HGCCITUWB12M

HG
HOT GALVANIZED



RF Coil Roofing Nails

Length	Shank Diameter	Shank	Tub 840 Piece
ELECTRO GALVANIZED			
7/8"	.120"	Smooth	HGC78EGCRFGT
1"	.120"	Smooth	HGC1EGCRFGT
1-1/4"	.120"	Smooth	HGC114EGCRFGT
1-1/2"	.120"	Smooth	HGC112EGCRFGT
1-3/4"	.120"	Smooth	HGC134EGCRFGT

FINISH & TRIM
BOX PROGRAM



15 gauge "DA"-Style
Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper
BRIGHT		
1-1/4"	HGCADA114B	4
1-1/2"	HGCADA112B	4
1-3/4"	HGCADA134B	4
2"	HGCADA2B	4
2-1/4"	HGCADA214B	4
2-1/2"	HGCADA212B	2
ELECTRO GALVANIZED		
1-1/4"	HGCADA114G	4
1-1/2"	HGCADA112G	4
1-3/4"	HGCADA134G	4
2"	HGCADA2G	4
2-1/4"	HGCADA214G	4
2-1/2"	HGCADA212G	2
304 STAINLESS STEEL		
1-1/2"	HGCADA112S4	2
2"	HGCADA2S4	2
2-1/2"	HGCADA212S4	2
316 STAINLESS STEEL		
1-1/2"	HGCADA112S6	2
2"	HGCADA2S6	2
2-1/2"	HGCADA212S6	2



15 gauge "FN"-Style
Angled Finish Nail

Size	Box 3,650 Piece	Boxes / shipper
ELECTRO GALVANIZED		
1-1/4"	HGCAFN114G	4
1-1/2"	HGCAFN112G	4
1-3/4"	HGCAFN134G	4
2"	HGCAFN2G	4
2-1/2"	HGCAFN212G	2
304 STAINLESS STEEL		
1-1/2"	HGCAFN112S4	2
1-3/4"	HGCAFN2S4	2
2"	HGCAFN212S4	2



16 gauge "AF"-Style
Angled Finish Nail

Size	Box 2,000 Piece	Boxes / shipper
ELECTRO GALVANIZED		
1"	HGCBFA1G	10
1-1/4"	HGCBFA114G	10
1-1/2"	HGCBFA112G	10
1-3/4"	HGCBFA134G	10
2"	HGCBFA2G	10
2-1/2"	HGCBFA212G	8
304 STAINLESS STEEL		
1-1/2"	HGCBFA112S4	6
2"	HGCBFA2S4	6
2-1/2"	HGCBFA212S4	6
316 STAINLESS STEEL		
2"	HGCBFA2S6	6
2-1/2"	HGCBFA212S6	6



16 gauge "SF"-Style
Straight Finish Nail

Size	Box 2,500 Piece	Boxes / shipper
ELECTRO GALVANIZED		
3/4"	HGCBSF34G	10
7/8"	HGCBSF78G	10
1"	HGCBSF1G	10
1-1/8"	HGCBSF118G	10
1-1/4"	HGCBSF114G	10
1-1/2"	HGCBSF112G	10
1-3/4"	HGCBSF134G	10
2"	HGCBSF2G	10
2-1/4"	HGCBSF214G	8
2-1/2"	HGCBSF212G	8
304 STAINLESS STEEL		
1-1/4"	HGCBSF114S4	6
1-1/2"	HGCBSF112S4	6
2"	HGCBSF2S4	6
2-1/2"	HGCBSF212S4	6
316 STAINLESS STEEL		
1-1/2"	HGCBSF112S6	6
2"	HGCBSF2S6	6
2-1/2"	HGCBSF212S6	6



18 gauge Brad Nail

Size	Box 2,500 Piece	Boxes / shipper
ELECTRO GALVANIZED		
5/8"	HGCCBD58G	10
3/4"	HGCCBD34G	10
1"	HGCCBD1G	10
1-1/8"	HGCCBD118G	10
1-1/4"	HGCCBD114G	10
1-1/2"	HGCCBD112G	10
1-3/4"	HGCCBD134G	10
2"	HGCCBD2G	10
304 STAINLESS STEEL		
1"	HGCCBD1S4	6
1-1/4"	HGCCBD114S4	6
1-1/2"	HGCCBD112S4	6
2"	HGCCBD2S4	6
316 STAINLESS STEEL		
3/4"	HGCCBD34S6	6
1"	HGCCBD1S6	6
1-1/4"	HGCCBD114S6	6



Product availability varies by location.

Product availability varies by location.

FINISH & TRIM
CLAMSHELL PROGRAM

- See-through clamshell for high product visibility
- Easy open/close polypropylene plastic with performance gains in temperatures from 32°-150°F
- Foam inserts across entire line keep clamshells intact and upright inside easy-tear master cartons
- Clamshells designed to also be hung from peg hook



Product availability varies by location.

16 GA
ANGLED NAIL
"AF"-STYLE
16 gauge "AF"-Style
Angled Finish Nail

Size	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED		
1-1/2"	HGCBFAF112G1M	10
2"	HGCBFAF2G1M	10
2-1/2"	HGCBFAF212G1M	10
304 STANLESS STEEL		
1-1/2"	HGCBFAF112S41M	5
2"	HGCBFAF2S41M	5
2-1/2"	HGCBFAF212S41M	5
316 STANLESS STEEL		
2"	HGCBFAF2S61M	5
2-1/2"	HGCBFAF212S61M	5



16 GA
STRAIGHT NAIL
"SF"-STYLE
16 gauge "SF"-Style
Straight Finish Nail

Size	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED		
3/4"	HGCBSF34G1M	10
7/8"	HGCBSF78G1M	10
1"	HGCBSF1G1M	10
1-1/8"	HGCBSF118G1M	10
1-1/4"	HGCBSF114G1M	10
1-1/2"	HGCBSF112G1M	10
1-3/4"	HGCBSF134G1M	10
2"	HGCBSF2G1M	10
2-1/4"	HGCBSF214G1M	10
2-1/2"	HGCBSF212G1M	10
304 STANLESS STEEL		
1-1/2"	HGCBSF112S41M	5
2"	HGCBSF2S41M	5
2-1/2"	HGCBSF212S41M	5
316 STANLESS STEEL		
1-1/2"	HGCBSF112S61M	5
2"	HGCBSF2S61M	5
2-1/2"	HGCBSF212S61M	5



18 GA
BRAD NAIL
18 gauge
Brad Nail

Size	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED		
5/8"	HGCCBD58G1M	10
3/4"	HGCCBD34G1M	10
1"	HGCCBD1G1M	10
1-1/8"	HGCCBD118G1M	10
1-3/16"	HGCCBD1316G1M	10
1-1/4"	HGCCBD114G1M	10
1-1/2"	HGCCBD112G1M	10
1-3/4"	HGCCBD134G1M	10
2"	HGCCBD2G1M	10
304 STANLESS STEEL		
3/4"	HGCCBD34S41M	5
1"	HGCCBD1S41M	5
1-1/4"	HGCCBD114S41M	5
1-1/2"	HGCCBD112S41M	5
2"	HGCCBD2S41M	5
316 STANLESS STEEL		
1"	HGCCBD1S61M	5
1-1/4"	HGCCBD114S61M	5



23 GA
PIN NAIL
23 gauge
Pin Nail

Size	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED		
1/2"	HGCEPN12G2M	10
5/8"	HGCEPN58G2M	10
3/4"	HGCEPN34G2M	10
1"	HGCEPN1G2M	10
1-3/16"	HGCEPN1316G2M	10



FC
FLOORING CLEAT
"L"-Style
Flooring Cleat


Size	Gauge	Clamshell 1,000 Piece	Clamshells / master
ELECTRO GALVANIZED			
1-1/2"	16	HGCBCL112G	5
2"	16	HGCBCL2G	5



Product availability varies by location.

Reference Materials

Finish Icons & Explanations.....131
Common Construction Screw Attributes.....133
Outdoor Screw Attributes134
Huttig-Guard Warranty135









WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

FINISH ICONS & EXPLANATIONS

FINISH INFORMATION	DESCRIPTION	RECOMMENDATIONS	
Bright 	Plain, "bright" steel without any additional protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.	
Blued 	Exposed to heat for "sterilization", which creates the blue appearance.	Most commonly used on lath or other relatively small nails, which at one time were often held in the mouth prior to nailing.	Not recommended for outdoor applications or where moisture may be present.
Vinyl Coated 	Nail dipped in vinyl; vinyl heats as nail is driven into wood for easier driving, provides nominal enhanced holding power when cools.	Vinyl coating does not provide protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.
Phosphate Coated 	Iron phosphate coating created on the surface of the fastener to enhance adhesion of paint and other finishes (drywall compound).	Phosphate coating provides minimal protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.
Zinc Plated / Yellow Zinc Plated  	Clear or yellow zinc coating applied to fastener; smooth, shiny finish.	Zinc plating provides minimal protection against corrosion.	Not recommended for outdoor applications or where moisture may be present.
Electro Galvanized 	Zinc plating bonded to steel with electrical charges; smooth, shiny finish.	Electro galvanization provides moderate protection against corrosion.	Recommended for outdoor applications excluding treated lumber.
Hot Galvanized 	Hot zinc applied to fastener for thicker, more durable coating; rougher, sometimes darker finish.	Hot galvanization provides significant protection against corrosion.	Recommended for outdoor applications and with treated lumber.
Outdoor Galvanized 	Multi-step process; zinc applied to fastener followed by a variety of methods to harden the coating for additional protection.	Outdoor galvanization provides significant protection against corrosion, equal to or better than hot galvanization.	Recommended for outdoor applications and with treated lumber.
Copper 	Copper is anti-corrosive by nature; known for durability and longevity. Develops attractive patina with age.	Commonly used with roofing tiles and slates, copper roofs and gutters; can also be used with treated lumber.	Not recommended for use with aluminum flashing or other aluminum materials due to corrosive reaction.
Aluminum / Painted Aluminum 	Inherently resistant to corrosion, lighter than comparable steel nails.	Used with aluminum flashing, gutters, siding, and screening.	Not recommended for use with treated lumber or copper flashing due to corrosive reaction.

FINISH ICONS & EXPLANATIONS

FINISH	RECOMMENDATIONS	
Professional Limited 15 Year Warranty 	Limited 15 year fastener warranty.	Recommended for outdoor applications and with treated lumber.
Premium Limited 50 Year Warranty 	Limited 50 year fastener warranty.	Recommended for outdoor applications and with treated lumber.
Platinum Limited Lifetime Warranty 	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber.
Stainless Steel 304 Limited Lifetime Warranty 	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, and redwood.
Stainless Steel 305 Limited Lifetime Warranty 	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, and redwood.
Stainless Steel 316 Limited Lifetime Warranty 	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, redwood, and marine

Product availability varies by location.

COMMON CONSTRUCTION SCREW ATTRIBUTES

DRIVE



PHILLIPS DRIVE

Cross-shaped recess designed to cam-out (bit slips out of the drive) before being overdriven, preventing screws breaking from too much torque.



SQUARE DRIVE

Bit fits into screw head, less likely to slip out. Screw stays on the bit, easier for one-handed fastening.



STAR DRIVE

“Positive” drive; keeps driving tool in place, even with high torque. Eliminates head spinouts.



SLOT DRIVE

Most basic drive style. Not recommended for use with power tools or with high torque.

HEAD



BUGLE HEAD

Used with drywall and softer woods where head can sink just below surface, holding material beneath. Rounded edges, sloping neck prevent tearing of material.



COUNTERSINK FLAT HEAD

Used with wood, cement board, and other similar materials. Flat head sits flush.



COUNTERSINK FLAT HEAD WITH NIBS

Used with wood, cement board, and other similar materials. Flat head sits flush. Nibs help to pull material from the hole, and to “seat” the head for smoother finished surface.



DOUBLE COUNTERSINK FLAT HEAD WITH NIBS

Used with wood, cement board, and other similar materials. Double countersink flat head sits flush without pre-drilling hole. Twice as many nibs to help to pull material from the hole, and to “seat” the head for smoother finished surface.



TRIM HEAD

Relatively small head, roughly same size as finish nail head. Sinks beneath the surface for low visibility.



TRIM HEAD WITH NIBS

Relatively small head, roughly same size as finish nail head. Sinks beneath the surface for low visibility. Nibs help to “seat” the head into the hole.



PAN HEAD

For high-torque installations into wood or metal. Lower profile than oval or round screws, with a flat or slightly rounded top and vertical edges.



MUSHROOM HEAD

Common on screws used with composite lumber. Head not much larger than shank; designed to sink into the hole, trapping material beneath.



MODIFIED TRUSS / WASHER HEAD

Larger head diameter for holding material in place, low profile for applications with minimal clearance and/or minimized appearance.



WAFER HEAD

Used with wood, cement board, and other similar materials. Flat, wider head sits flush while providing expanded bearing surface.



WAFER HEAD WITH NIBS

Used with wood, cement board, and other similar materials. Flat, wider head sits flush while providing expanded bearing surface. Nibs help to “seat” the head for smoother finish.



HEX WASHER HEAD

Hex head is preferred for high-volume projects; relatively easy to engage, tighten, and loosen, supports more tightening torque than other head styles. Metal flange at base of head provides pull-through resistance.



SLOTTED HEX WASHER HEAD

Benefits of hex washer head, plus can also be driven with a standard/flat-blade screwdriver or bit.



HEX HEAD WITH NEOPRENE WASHER

Benefits of hex head, plus neoprene-bonded washer provides seal against moisture.

THREAD



COARSE THREAD

Used with wood, cement board, and other similar materials. Coarse thread accepts more material between threads and is forgiving; more likely to drill and hold even if slightly dinged or otherwise blemished.



HIGH-LOW THREAD

Used with low-density materials such as cement board. Thread design reduces the amount of required torque, reduces cracking, and has greater pull-out resistance.



TRIPLE THREAD

Common on screws used with composite lumber. Traps material within the hole, away from the surface. Useful with softer materials including composites and vinyl.



FINE THREAD

Used with attaching to steel and other metals and thin pieces of wood. Threads are finer, closer together, more precise; necessary when working with thinner and/or more brittle materials. Greater holding power compared to coarse thread.

POINT



SHARP POINT

Used when fastening to wood and other medium to soft materials. May require drilling of pilot point.



TYPE 17 POINT

Used when fastening to wood, especially denser, harder woods. Flute in point helps to draw material out of the hole.



SELF-DRILL POINT

Used when fastening to steel, other types of metal, and thin pieces of wood. Drills own pilot point into medium to heavy steel.



SPADE POINT

Used to quickly bore holes through wood and similar materials.

OUTDOOR SCREW ATTRIBUTES

HUTTIG-GUARD™ OUTDOOR SCREWS

		WARRANTY/FINISH			
OUTDOOR	HEAD	COUNTERSINK FLAT HEAD WITH NIBS	DOUBLE COUNTERSINK FLAT HEAD WITH NIBS	COUNTERSINK FLAT HEAD WITH NIBS	COUNTERSINK FLAT HEAD WITH NIBS
	DRIVE	STAR DRIVE	STAR DRIVE	STAR DRIVE	STAR DRIVE
	THREAD	COARSE THREAD	COARSE SERRATED THREAD	COARSE SERRATED THREAD	COARSE SERRATED THREAD
	POINT	TYPE 17 POINT	TYPE 17 LONG POINT	TYPE 17 POINT	TYPE 17 POINT
	SHANK	---	KNURLED SHANK	---	---
TRIM	HEAD	TRIM HEAD WITH NIBS	TRIM HEAD WITH NIBS	---	---
	DRIVE	STAR DRIVE	STAR DRIVE	---	---
	THREAD	COARSE THREAD	COARSE SERRATED THREAD	---	---
	POINT	TYPE 17 POINT	TYPE 17 LONG POINT	---	---
	SHANK	---	KNURLED SHANK	---	---
COMPOSITE	HEAD	---	---	MUSHROOM HEAD	---
	DRIVE	---	---	STAR DRIVE	---
	THREAD	---	---	TRIPLE THREAD	---
	POINT	---	---	TYPE 17 POINT	---

Huttig Building Products Limited Warranty for Huttig-Guard Professional, Premium, Platinum, or Stainless Steel Fasteners

What Does This Warranty Cover?

This limited warranty applies to the first retail purchaser of Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners (also referred to herein as the “Fasteners”). Huttig Building Products warrants that such fasteners will be free from any defects in material and workmanship for the specified warranty period for the original project for which it was installed when used in accordance with the recommendations listed in the Huttig-Grip Fasteners Catalog or elsewhere by Huttig Building Products. Please note that all metal fasteners have the potential to corrode. There are no warranties (including any of warranty of merchantability) that extend beyond the foregoing and such warranty applies to Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners only.

Product	Warranty Period
Professional	15 Years
Premium	50 Years
Platinum	Lifetime
Stainless Steel	Lifetime

Who Is Entitled to the Warranty and How Long Does The Coverage Last?

This warranty is granted to the first retail purchaser only, is not transferable and lasts for the product specified warranty period for the project for which it was originally installed.

What Will Huttig Building Products Do?

Huttig Building Products will replace the defective Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners with like or equivalent product. Any labor for installation, removal or other material charges are not covered by this limited warranty.

What Does This Warranty Not Cover?

- This warranty does not cover issues caused by:
- Any defect due to environmental conditions or inadequate or improper handling, transportation, storage or maintenance,
 - Failure or damage caused by improper installation (including chipped coating during installation), application, improper preparation, the building site, any 3rd party products, inadequate structure design, reuse or reinstallation of the fastener,
 - Failure or damage caused by wood destroying insects, animals, wood fungus, mold, mildew, exposure to chemicals or other hazardous substances, a corrosive environment or materials, standing water, or premature deterioration of building materials,
 - Failure or damage used in a structure that does not comply with all local, state and federal building codes, laws, rules and regulations,
 - Use of fasteners in extreme temperatures or extreme environmental conditions,
 - Fasteners subjected to negligence, excessive or improper use, willful misconduct, actions or inactions by the installer (general contractors, owners, third party builders),
 - Wear or damage due to traffic involving motorized vehicles.

Huttig Building Products’ liability is limited to the replacement of the defective product only except in the event replacement of the product is not available, then a refund of the purchase price of the defective product.

How Do You File A Claim?

If the performance of Huttig-Guard fasteners does not meet the stated limited warranty, the original purchaser must contact Huttig Building Products to initiate a claim. Please use the Defective Product Warranty Claim Form found at <https://huttig.com/warranty>.

Information required for claim:

Customer Information:

First Name, Last Name

Street Address, City, State, Zip

E-mail address

Telephone number

Product Information & Claim Details:

Purchase Date

Purchase Receipt

Product Name, including Color

Quantity Purchased

Quantity Defective

Date Installed

Where Installed (back yard, pool area, et cetera)

Application (fence, deck, et cetera)

Include photos of structure and defective product along with original box and receipt.

Initiate claim by email at warranty@huttig.com or by mail:

Huttig Building Products

ATTN: TQMP

555 Maryville University Drive

Suite 400

St. Louis, MO 63141

This warranty is subject to revision without notice.

THIS WRITING CONTAINS THE ENTIRE AGREEMENT BETWEEN HUTTIG BUILDING PRODUCTS AND THE CONSUMER PURCHASER. ALL WARRANTIES, WHETHER EXPRESSED OR IMPLIED, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXCLUDED EXCEPT AS OTHERWISE SPECIFICALLY SET FORTH HEREIN. HUTTIG BUILDING PRODUCTS’ LIABILITY IS LIMITED TO THE PURCHASE PRICE OF THE DEFECTIVE PRODUCT. IN NO EVENT ARE CONSEQUENTIAL OR INCIDENTAL DAMAGES RECOVERABLE UNDER THIS WARRANTY.

BRANCH DIRECTORY



CORPORATE OFFICE

555 Maryville University Dr
Suite 400
St. Louis, MO 63141
800-325-4466

ALBUQUERQUE

8333 Washington PL., NE
Suite H
Albuquerque, NM 87113
505-823-9300
Fax: 505-823-9303

AUBURN

525 "C" Street, NW
Auburn, WA 98001
253-941-2600
Fax: 253-735-9370

AUGUSTA

#7 Gaywalk Street
Augusta, ME 04330
800-451-4271
Fax: 207-622-5660

CAPE GIRARDEAU

4072 Nash Road
Cape Girardeau, MO 63701
800-866-0020
Fax: 800-866-3293

CENTRAL FLORIDA

45150 Hwy 27 N.
Davenport, FL 33897
800-866-1064
Fax: 800-866-3298

DALLAS

2115 Valley View Lane
Farmers Branch, TX 75234
472-620-2200
Fax: 972-620-4696

ELKHART

30244 Country Road # 12
Elkhart, IN 46514
800-348-7628
Fax: 574-262-1174

FORT MYERS

3580 Work Drive
Fort Myers, FL 33916
239-332-2424
Fax: 239-332-7806

GREENVILLE

36 West Lenhardt Road
Piedmont, SC 29673
864-277-9123
Fax: 800-388-7180

Hooksett

25 Lehoux Drive
Hooksett, NH 03106
603-624-0543
Fax: 800-237-8061

JACKSON

240 NW Industrial Pkwy.
Jackson, MS 39213
800-866-0101
Fax: 800-825-3291

JACKSONVILLE

5203 W. 1st Street
Jacksonville, FL 32254
904-378-1361
Fax: 904-378-0980

LANCASTER

3639 Hempland Road
Lancaster, PA 17601
800-232-4000
Fax: 800-552-0880

LATROBE-BENBILT

123 BenBilt Place
Greensburg, PA 15601
800-830-7394
Fax: 800-830-7395

MEDFORD

2194 Sage Road
Medford, OR 97501
541-773-8474
Fax: 541-773-2598

NEWINGTON

407 Alumni Rd
Newington, CT 06111
360-667-8541
Fax: 860-667-4289

PHOENIX

3601 North 34th Ave
Phoenix, AZ 85017
602-415-6200
Fax: 602-272-9326

RIVIERA BEACH

1311 West 15th Street
Riviera Beach, FL 33404
561-881-3851
Fax: 561-881-5550

ROCKY MOUNT

3375 North Wesleyan Blvd
Rocky Mount, NC 27804
252-446-2446
Fax: 252-212-3857

SACO

65 Spring Hill Road
Saco, ME 04072
888-784-2930
Fax: 207-283-9982

SACRAMENTO

8120 Power Ridge Rd.
Sacramento, CA 95826
916-381-4242
Fax: 916-381-2834

SOCAL

8865 Utica Ave. Unit B
Rancho Cucamonga,
CA 91730
909-987-8419
Fax: 909-483-4283

TAUNTON

25 John Hancock Road
Taunton, MA 02780
866-854-8639
Fax: 508-822-1691

TIGARD

8100 SW Hunziker Street
Tigard, OR 97223
503-620-1411
Fax: 503-684-4861

WILKES-BARRE

Hanover Industrial Estates
350 Lasley Ave
Hanover Township, PA
18706
800-432-8055
Fax: 570-829-0681

