# HUTTIG-GRIP **FASTENERS**

CATALOG



# A STRONG FOUNDATION

Woodgrain, Inc. is one of the largest millwork operations in the world, with locations throughout the United States and Chile. Founded in 1954 by Merrill "Bud" Dame, today Woodgrain is a leading producer of mouldings, doors, and windows, as well as a premier distributor of specialty building products.

Headquartered in Fruitland, Idaho, Woodgrain proudly continues Bud's legacy by remaining family-owned and operated, while making the highest quality wood building products with an unwavering focus on our customers.

Woodgrain continues to grow and to leverage its strength of being vertically integrated. In May of 2022, Woodgrain acquired Huttig Building Products — one of the country's largest distributors of millwork, building materials, and wood products. Founded in 1865 by brothers Charles and William Huttig, Huttig's culture and commitment to the industry were a natural fit with Woodgrain.

With the acquisition, Woodgrain offers a coast-to-coast distribution network, with a wide range of value-added products and services. Woodgrain is now positioned to bring unrivaled value to customers and supply partners.

Huttig-Grip Fasteners are now part of the Woodgrain family of brands.

- Woodgrain's global supply-chain expertise enhances the robust existing sourcing network
- Warehouse and direct programs available throughout the expanded national distribution footprint
- Fasteners, doors, millwork, and building materials all available from your same supplier

# BUILT BETTER BY DESIGN

The Huttig-Grip<sup>™</sup> fasteners program was developed by a team of industry experts to solve the pain points with existing lines, plus provide a single source for all fastener categories.

The result is the Huttig-Grip Fasteners family of products, encompassing all types and all phase of construction;

- HUTTIG-GRIP™ construction fasteners
- **HUTTIG-GUARD**<sup>™</sup> exterior screws & stainless steel fasteners
- **HUTTIG-SP**<sup>™</sup> professional drywall & steel framing screws

### **Nails & Screws**

Designed to work for you and for your customers, the Huttig-Grip program is built around 1 lb. and 5 lb. master cartons having the same width and height, simplifying stocking and merchandising. Nails and screws are also available in buckets and bulk boxes.

### **Collated Fasteners**

Stocking Huttig-Grip collated fasteners allows you to offer the optimal mix for your market, reduce the number of vendors, and streamline the assortment for improved sales and inventory turns.

### **Stainless Steel**

Huttig-Guard stainless steel screws, nails, and collated fasteners round out your fasteners section and ensure that you can meet the requirements in demanding applications.

# THE DIFFERENCE IS IN THE DETAILS

### **MASTER CARTONS**

Same-size master cartons simplify and organize your fastener section; easy to merchandise, creates an improved shopping experience.



Functional design keeps fasteners contained, preventing loss & theft

- Label seals the box top
- Bottom folds inward, contents keep it closed



- Boxes constructed using microflute material, for same or more strength than the others with less weight.
- Microflute also allows for stronger crease lines for tighter packing with less crushing.

### 1 & 5 LB. PACKAGES

Labels are thoughtfully designed to lead customers to the general application, then to the type of fastener, and ultimately to the exact nail or screw.



### ANATOMY OF THE LABEL

- 1 Vertical banner highlights most common application
- Fastener type and size in large, easy-to-read font
- 3 Actual-size fastener photo shows exactly what is in the box
- Finish icon system makes it easy to spot fastener finish
- **5** Background photo provides application information
- 6 Application in text
- 7 Approximate quantity to purchase what's needed
- 8 Screws icon system quickly identifies key attributes

# **COMPLETE PROGRAM**

### **HAND DRIVE BULK & COLLATED**

Our distinctive, informative, eye-catching approach to packaging is the foundation of our bulk and collated nail programs.



### **COLLATED FASTENERS**

Huttig-Grip collated fasteners work flawlessly with practically every make and model on the market today.

- Framing Nails
- Joist Hanger Nails
- Coil Roofing Nails
- Siding/Fencing Nails
- Medium & Wide Crown Staples
- Narrow Crown & Tacker Staples
- Finish & Brad Nails
- Tub Program also available
- Stainless steel available



# **COLLATED FINISH & TRIM FASTENERS**

- 15 Gauge & 16 Gauge Finish Nails
- 18 Gauge Brad Nails
- Narrow Crown Staples
- Tacker Staples
- 23 Gauge Pin Nails
- Stainless steel available

### Available in box or clamshell programs:

- Boxes are easy to merchandise, upright or stacked, to maximize shelf utilization
- Clamshells offer smaller pack quantities for convenience or specialty projects





# **TABLE OF CONTENTS**

Construction Fasteners	2
Huttig-Grip General Construction Nails	4
Huttig-Grip Outdoor Construction Fasteners	17
Huttig-Grip Roofing/Siding Nails	28
Huttig-Grip Drywall Nails	37
Huttig-Guard Stainless Steel Nails	40
Wood & Exterior Screws	48
Huttig-Grip Wood Screws	50
Huttig-Guard Exterior Screws	54
Huttig-Guard Stainless Steel Screws	62
Drywall & Steel Framing Fasteners	66
Huttig-Grip Drywall Screws	68
Huttig-Spin Drywall & Steel Framing Fasteners	72
Collated Screws	88
Huttig-Spin Drywall	89
Huttig-Spin Subfloor	90
Huttig-Guard Outdoor	90
Collated Fasteners	94
Huttig-Grip Collated Framing, Siding & Roofing Nails	96
Huttig-Grip Collated Staples	108
Huttig-Grip Finish & Trim Nails	114
Huttig-Guard Collated Stainless Steel Fasteners	118
Specialty Programs	128
Reference Materials	140
Penny Nail Chart	142
Finish Icons & Explanations	143
Huttig-Guard Outdoor Screw Comparison	145
Common Construction Screw Attributes	146
Collated Fastener / Tool Compatibility Guide	147
Huttig-Guard Warranty	152



# **Construction Fasteners**

# **HUTTIG-GRIP**™ & **HUTTIG-GUARD**™ NAILS & STAPLES





WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

# **HUTTIG-GRIP**<sup>™</sup> Construction Fasteners

Nails & staples typically used with residential and/or wood structures and projects.

Color coded packaging help guide you to the four main categories by application.

GENERAL CONSTRUCTION

OUTDOOR CONSTRUCTION

**ROOFING & SIDING** 

DRYWALL

# **GENERAL CONSTRUCTION NAILS**

Indoors or environments where fastener will not be directly exposed to moisture or other potentially corrosive conditions. Limited or no resistance to corrosion.

### **APPLICATIONS**

- Finish/Trim
- Flooring
- Forming

- Framing
- Masonry
- Pole Barn

### **FINISHES**





# **OUTDOOR CONSTRUCTION** NAILS & STAPLES

Outdoor applications or where fastener may be exposed to moisture - have additional protection against rust & corrosion.

### **APPLICATIONS**

- Fence/Deck
- Finish/Trim
- Framing

- Landscaping
- Pole Barn
- Poultry Netting

#### **FINISHES**







# **ROOFING & SIDING NAILS**

Nails designed for use with specific types of roofing, including asphalt, metal, and tile, and specific types of siding, including aluminum, vinyl, and wood. May or may not have protection against rust & corrosion, depending upon application and finish.

### **APPLICATIONS**

- Roofing
- Siding
- Trim

- Exterior Lath/Stucco
- Gutters

#### **FINISHES**









# **DRYWALL** NAILS

Nails for securing gypsum board or for installing lath in preparation for plaster. Limited or no resistance to corrosion.

#### **APPLICATIONS**

Drywall to Wood

Interior Lath/Plaster

#### **FINISHES**









# **Construction Fasteners**

# **HUTTIG-GRIP**™ NAILS & STAPLES

H	luttig-Grip General Construction Nails	
	Finish/Trim	
	Flooring	6
	Forming	
	Framing	8
	Masonry	12
	Pole Barn	
	LandscapingLandscaping	14
	Huttig-Grip Outdoor Construction Nails & Staples	
i	Fence/Deck	17
	Fencing	
	Finish/Trim	
	Framing	
	Landscaping	
	Masonry	
	Pole Barn	
	Speciality	
	• •	
ŀ	luttig-Grip Roofing & Siding Nails	
	Roofing	
	Roofing/Siding	
	Siding	
	Siding & Trim	
	Speciality	
	Stucco/Exterior Lath	36
H	Huttig-Grip Drywall Nails	
i	Drywall	37
	Interior Lath	38

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

# **Finish Nail**

For attaching trim and moulding.

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Cupped head for ease of concealment
- Diamond point

**Available Finishes** 









_											
Siz	ze	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box			
BRIG	BRIGHT										
1-1/4"	3d	.067"	.099"	Smooth	693	HGN3F1	HGN3F5	HGN3F			
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4F1	HGN4F5	_			
1-3/4"	5d	.072"	.106"	Smooth	425	HGN5F1	_	_			
2"	6d	.092"	.135"	Smooth	267	HGN6F1	HGN6F5	_			
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8F1	HGN8F5	_			
3"	10d	.113"	.155"	Smooth	109	HGN10F1	HGN10F5	_			
3-1/4"	12d	.113"	.155"	Smooth	90	HGN12F1	_	_			
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16F1	HGN16F5	_			





# **Cut Flooring Nail**

For laying tongue and groove softwood and hardwood flooring.

- Tempered hardened steel for harder, less brittle nail
- Blunt point and tapered shank minimize splitting in wood
- Flat, rectangular head



Size		Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
TEM	PER	ED HARD	ENED STEEL - I	BRIGHT	
1-1/2"	4d	165	HGN4CUTFL1	_	_
2"	6d 104		HGN6CUTFL1	HGN6CUTFL5	_
2-1/4"	7d	88	HGN7CUTFL1	HGN7CUTFL5	_
2-1/2"	8d	78	HGN8CUTFL1	HGN8CUTFL5	_
3"	10d	53	_	_	HGN10CUTFL
3-1/2"	3-1/2" 16d 35		HGN16CUTFL1	HGN16CUTFL5	_

# **Flooring Nail**

For attaching hardwood strip flooring to subfloor.

- Tempered hardened steel for harder, less brittle nail
- Spiral shank prevents loosening of nail, reduces squeaks



Size		Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
2-1/4"	7d	.113"	_	Spiral	160	HGN7FLR1	HGN7FLR5
2-1/2"	8d	_	_	Spiral	110	HGN8FLR1	_

# **Underlayment Nail**

For attaching composition underlayment or plywood over subfloor or existing floors.

- Flat head seats flush against surface
- Diamond point



•							
Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT							
1-1/4"	.099"	1/4"	Annular Thread	332	HGN114ATUL1	HGN114ATUL5	HGN114ATUL
1-3/8"	.099"	1/4"	Annular Thread	300	HGN138ATUL1	HGN138ATUL5	_
1-1/2"	.099"	1/4"	Annular Thread	290	HGN112ATUL1	HGN112ATUL5	_
1-7/8"	.099"	1/4"	Annular Thread	199	HGN178ATUL1	HGN178ATUL5	HGN178ATUL
2"	.106"	17/64"	Annular Thread	175	HGN2ATUL1	HGN2ATUL5	_
2-3/8"	.106"	17/64"	Annular Thread	141	HGN238ATUL1	_	_

Available Finish **BRT** 

BRIGHT

Available Finish

Available Finish

**BRT** 



# **Duplex Nail**

For concrete forms, scaffolding, and other temporary applications.

- Also known as scaffold nail
- Double head and smooth, uncoated shank allow for ease of removal
- · Diamond point
- Conforms to ASTM F1667-17

Available Finish





Size*		Shank Diameter	Head Separation	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box		
BRIG	BRIGHT										
1-3/4"	6d	.113"	1/4"	Smooth	156	HGN6DUPX1	HGN6DUPX5	<u> </u>	HGN6DUPX		
2-1/4"	8d	.131"	1/4"	Smooth	85	HGN8DUPX1	HGN8DUPX5	HGN8DUPXBK	HGN8DUPX		
2-3/4"	10d	.148"	5/16"	Smooth	57	HGN10DUPX1	HGN10DUPX5	_	HGN10DUPX		
2-7/8"	12d	.148"	5/16"	Smooth	51	HGN12DUPX1	HGN12DUPX5	HGN12DUPXBK	HGN12DUPX		
3"	16d	.162"	3/8"	Smooth	46	HGN16DUPX1	HGN16DUPX5	HGN16DUPXBK	HGN16DUPX		
3-1/2"	20d	_	_	Smooth	_	_	_	_	HGN20DUPX		

<sup>\*</sup> Length of the nail is measured from beneath the lower head to tip of nail



# **Box Nail**

For light-duty general construction, carpentry, and box making.

- Relatively thinner shank and sharp point minimize splitting in wood
- Smaller shank and head than common nails of the same length
- Flat head sits flush against surface
- Diamond point
- Conforms to ASTM F1667-17



Size		Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box			
BRIGHT											
1-1/2"	4d	.080"	.219"	Smooth	374	HGN4BX1	HGN4BX5	_			
1-3/4"	5d	.080'	.219"	Smooth	357	HGN5BX1	_	_			
2"	6d	.099"	.266"	Smooth	225	HGN6BX1	HGN6BX5	_			
2-1/2"	8d	.113"	.297"	Smooth	136	HGN8BX1	HGN8BX5	_			
3"	10d	.128"	.312"	Smooth	88	HGN10BX1	HGN10BX5	_			
3-1/4"	12d	.128"	.312"	Smooth	83	HGN12BX1	HGN12BX5	_			
3-1/2"	16d	.135"	.344"	Smooth	69	HGN16BX1	HGN16BX5	HGN16BX			
4"	20d	.148"	.375"	Smooth	49	HGN20BX1	HGN20BX5	_			



### **Available Finishes**







### **Common Nail**

For heavy-duty general construction and framing.

- · Most versatile and popular style of nail
- Heavier shank provides greater resistance to bending
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17















Siz	:e	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
BRIG	НТ								
1-1/4"	3d	_	_	Smooth	540	HGN4C1	HGN4C5	_	HGN4C
1-1/2"	4d	.099"	.250"	Smooth	268	HGN4C1	HGN4C5	_	HGN4C
2"	6d	.113"	.266"	Smooth	167	HGN6C1	HGN6C5	HGN6CBK	HGN6C
2-1/4"	7d	_	_	Smooth	150	_	HGN7C5	_	_
2-1/2"	8d	.131"	.281"	Smooth	104	HGN8C1	HGN8C5	HGN8CBK	HGN8C
3"	10d	.148"	.312"	Smooth	67	HGN10C1	HGN10C5	HGN10CBK	HGN10C
3-1/4"	12d	.148"	.312"	Smooth	63	HGN12C1	HGN12C5	HGN12CBK	HGN12C
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16C1	HGN16C5	HGN16CBK	HGN16C
4"	20d	.192"	.406"	Smooth	29	HGN20C1	HGN20C5	HGN20CBK	HGN20C
4-1/2"	30d	.207"	.438"	Smooth	110	_	HGN30C5	_	HGN30C
5"	40d	.226"	.469"	Smooth	80	_	HGN40C5	_	HGN40C
5-1/2"	50d	_	_	Smooth	65	_	HGN60C5	_	HGN60C
6"	60d	.262"	.531"	Smooth	50	_	HGN60C5	_	HGN60C
2"	6d	_	_	Ring	_	HGN6RSC1	_	_	_
2-1/2"	8d	_	_	Ring	_	HGN8RSC1	_	_	_
3-1/2"	16d	_	_	Ring	_	HGN16RSC1	_	_	_
VINY	L C	DATED							
2-1/2"	8d	.131"	.281"	Smooth	104	_	HGN8CC5	_	_
3-1/2"	16d	.162"	.344"	Smooth	47	_	HGN16CC	_	_



# **Joist Hanger Nail**

For attaching joist hangers to wood ledgers, headers and beams.

- Heavy gauge allows more surface contact and greater holding power
- Flat head seats flush against surface
- Diamond point

**Available Finishes** 












Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box			
BRIGHT											
2-1/2"	8	0.313"	Smooth	_	_	HGN2128JH5	_	HGN2128JH			
1-1/2"	9	0.313"	Smooth	125	HGN1129JH1	HGN1129JH5	HGN1129JHBK	HGN1129JH			
1-1/4"	10	0.281"	Smooth	194	HGN11410JH1	HGN11410JH5	_	_			
1-1/2"	10	0.281"	Smooth	165	HGN11210JH1	HGN11210JH5		HGN11210JH			
1-1/4"	11	0.281"	Smooth	_	HGN11411JH1	HGN11411JH5	_	_			

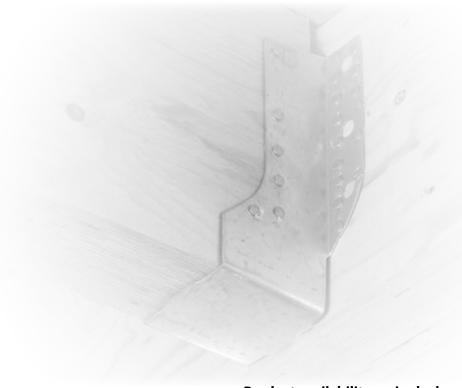

# Sinker

For heavy-duty general construction and framing.

- Checkered head to reduce hammer slipping
- Flat, countersunk checkered head
- Diamond point
- Conforms to ASTM F1667-17

Available Finish





Siz	e	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box	
VINY	VINYL COATED									
1-1/8"	3d	_	_	Smooth	940	HGN3CSKR1	_	_	_	
1-3/8"	4d	.080"	.203"	Smooth	530	HGN4CSKR1	HGN4CSKR5	_	HGN4CSKR	
1-7/8"	6d	.092"	.234"	Smooth	266	HGN6CSKR1	HGN6CSKR5	_	HGN6CSKR	
2-3/8"	7d	_	_	Smooth	220	HGN7CSKR1	HGN7CSKR5	HGN7CSKRBK	HGN7CSKR	
2-3/8"	8d	.113"	.266"	Smooth	141	HGN8CSKR1	HGN8CSKR5	HGN8CSKRBK	HGN8CSKR	
2-7/8"	10d	.120"	.281"	Smooth	105	HGN10CSKR1	HGN10CSKR5	HGN10CSKRBK	HGN10CSKR	
3-1/8"	12d	.135"	.312"	Smooth	81	HGN12CSKR1	HGN12CSKR5	HGN12CSKRBK	HGN12CSKR	
3-1/4"	16d	.148"	.344"	Smooth	62	HGN16CSKR1	HGN16CSKR5	HGN16CSKRBK	HGN16CSKR	
3-3/4"	20d	.177"	.375"	Smooth	41	HGN20CSKR1	HGN20CSKR5	_	HGN20CSKR	



# **Cut Masonry Nail**


For attaching furring strips and other materials to cinder block, mortar joints, fresh concrete and brick walls.

- Tempered hardened steel for harder, less brittle nail
- · Blunt point and tapered shank minimize splitting in wood
- Flat, rectangular head



**Available Finishes** 



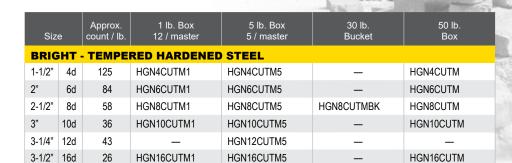

# **Fluted Masonry Nail**

For attaching wood furring strips, studs, or floor plates to fresh concrete.

- Tempered hardened steel for harder, less brittle nail
- · Flutes help to minimize cracking and allow debris to surface
- Flat head sits flush against surface
- Diamond point







						12 40	3023 101 11
Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT	- TEMPE	ERED HA	ARDENE	D STEEL			
3/4"	.148"	.313"	Fluted	230	HGN34FM1	HGN34FM5	_
1"	.148"	.131"	Fluted	176	HGN1FM1	HGN1FM5	HGN1FM
1-1/4"	.148"	.131"	Fluted	150	HGN114FM1	HGN114FM5	HGN114FM
1-1/2"	.148"	.131"	Fluted	129	HGN112FM1	HGN112FM5	HGN112FM
2"	.148"	.131"	Fluted	95	HGN2FM1	HGN2FM5	HGN2FM
2-1/2"	.148"	.131"	Fluted	77	HGN212FM1	HGN212FM5	HGN212FM
3"	.148"	.131"	Fluted	68	HGN3FM1	HGN3FM5	HGN3FM
3-1/2"	.162"	.344"	Fluted	48	HGN312FM1	HGN312FM5	_

# **Round Cap Fluted Masonry Nail**

For attaching base sheet or foam insulation to masonry block, parapets, and concrete substrates.

- Tempered hardened steel for harder, less brittle nail
- Oversized head helps to reduce pull-through and tears in substrate.
- Flutes help to minimize cracking and allow debris to surface







Size	Gauge	Head Diameter	Shank	Approx.	3 lb. Box 5 / master
		EMPEREI			
1"	8	1"	Fluted	312	HGN1RDTHFM3
1-1/4"	8	1"	Fluted	249	HGN114RDTHFM3
1-1/2"	8	1"	Fluted	210	HGN112RDTHFM3
2"	8	1"	Fluted	156	HGN2RDTHFM3
					1



### **Pole Barn Nail**


For attaching wall framing lumber to pole barn posts.

- · Tempered hardened steel for harder, less brittle nail
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17







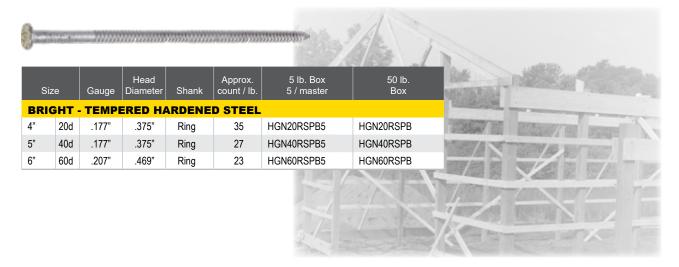

# **Spike**

For securing timbers and other similar landscaping materials.


- Checkered head to reduce hammer slipping
- Flat, countersunk head
- Diamond point
- Conforms to ASTM F1667-17

#### Available Finishes









# Make the right choice for outdoor projects, choose Huttig-Grip galvanized nails.

Huttig-Grip Hot Galvanized and Outdoor Galvanized Nails -Two Solutions to the Same Problems



Extend the life of your outdoor project.



Minimize staining and "bleeding" from rusting nails.



Use Huttig-Grip galvanized nails for extra protection against rust and corrosion.

Steel nails can be compromised by moisture, chemicals in the wood (naturally occurring or treated), and other factors. Coatings and other finishes can be applied for additional protection against corrosion and rust.



### **HUTTIG-GRIP HOT GALVANIZED NAILS** & OUTDOOR GALVANIZED NAILS

- Are recommended for outdoor applications and with treated lumber
- Meet or exceed ASTM A153 Class D requirements for galvanization
- Last longer than non-galvanized nails, extending the life of your project!



### OUTDOOR GALVANIZED

- Recommended for outdoor applications and with treated lumber
- Meet or exceed ASTM A153 Class D requirements
- Smoother finish than HG
- Outperforms HG in ASTM B117-compliant salt spray testing (evaluates approximate lifespan)



### HOT GALVANIZED

- Recommended for outdoor applications and with treated lumber
- Meet or exceed ASTM A153 Class D requirements
- Nails or the wire used to make nails may be tumbled or dipped in hot, molten zinc

Huttig-Grip galvanized nails availability varies by market preference; hot galvanized or outdoor galvanized might not be stocked in all areas. Visit huttig-grip.com/warranty for complete limited fastener warranty details.



#### OG **OUTDOOR GALVANIZED** OUTDOOR GALVANIZED

HG HOT GALVANIZED **HOT GALVANIZED** 

OG Outdoor Galvanization is an alternative to HG Hot Galvanization with equal or better corrosion resistance. HG Hot Galvanization is a traditional process to provide additional protection against corrosive environments and

### **ASTM Compliance & Testing**

OG coating thickness is equal to or better than ASTM A153D specifications.

HG coating thickness is equal to or better than ASTM A153D specifications.

OG outperforms HG in a traditional salt spray test performed according to ASTM B117.

### **Surface**

- Smooth, uniform coating for better protection
- Reduces tool jamming (when applied to collated nails)
- · Coating may not always be evenly coated or distributed
- Zinc may fill threads on ring or spiral shank nails
- Increases the diameter/bulk of the nail

### **Process**

	Primarily two methods to	produce OG nails:	Primarily two methods to	produce HG nails:
	Thermal Diffusion     Galvanization	2. EG Electro Galvanized Zinc + Organic Top Coat	Formed from Galvanized     Wire	2. Dipped in Molten Zinc After Nail Formation (Hot Dipped Galvanization)
	<ul> <li>Nails placed in a cylinder with a dry zinc mixture (zinc/iron), heated, and slowly rotated for several hours (vaporized diffusion process)</li> <li>Nails are then cleaned and passivated, and dried</li> </ul>	Nails are first electro galvanized     Electro galvanized nails then painted with an organic coating and baked twice     Organic coating behaves as a barrier between the zinc on the nail and corrosive materials such as the chemicals in treated lumber	Carbon steel used to manufacture nails is passed through a tank of molten zinc The galvanized wire is then used to form nails (most often used for collated nails)	Nails are formed from bright carbon steel wire     The formed nails are then dipped twice in molten zinc (more common for hand drive versus collated nails)
	Coating is harder than that of other zinc coatings	_	Zinc coating is softer than zinc/	iron OG coating
9	Thermal Diffusion Galvanization Minimal waste Acid-free cleaning Environmentally-friendly process	_	Molten Zinc  • Process creates significant was  • Acid-pickling (used to prepare harmful to environment	

### **HUTTIG-GUARD** STAINLESS STEEL NAILS

For the ultimate protection against corrosion, choose HUTTIG-GUARD stainless steel nails. Backed by a limited lifetime fastener warranty, HUTTIG-GUARD stainless steel nails are recommended for outdoor applications and with treated lumber, cedar, and redwood. Use HUTTIG-GUARD Grade 316 Stainless Steel nails in marine environments.

Product availability varies by location.

www.huttig-grip.com

# **Deck Nail**

For deck, patio, fence, and other outdoor construction.

- · Flat head seats flush against surface
- Diamond point
- Ring shank for use in softer woods and where vibration may be a factor
- Spiral shank for use with harder woods and near board ends to minimize splitting











Ring shank depicted, spiral shank also available

Siz	e _	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
нот	GAI	LVANIZE	ĒD						
1-3/4"	5d	_	_	Ring	155	HGN5HGRSDK1	_	_	<u> </u>
2"	6d	.120"	.281"	Ring	138	HGN6HGRSDK1	HGN6HGRSDK5	_	HGN6HGRSDK
2-1/2"	8d	.120"	.281"	Ring	106	HGN8HGRSDK1	HGN8HGRSDK5	HGN8HGRSDKBK	HGN8HGRSDK
3"	10d	.135"	.297"	Ring	78	HGN10HGRSDK1	HGN10HGRSDK5	_	HGN10HGRSDK
3-1/4"	12d	.135"	.297"	Ring	75	HGN12HGRSDK1	HGN12HGRSDK5	_	HGN12HGRSDK
3-1/2"	16d	.148"	.313"	Ring	52	HGN16HGRSDK1	HGN16HGRSDK5	HGN16HGRSDKBK	HGN16HGRSDK
4"	20d	_	_	Ring	33	_	HGN20HGRSDK5	_	_
2"	6d	.113"	.297"	Spiral	138	HGN6HGSTDK1	HGN6HGRSTDK5	_	_
2-1/2"	8d	.113"	.297"	Spiral	106	HGN8HGSTDK1	HGN8HGRSTDK5	HGN8HGSTDKBK	HGN8HGSTDK
3"	10d	.128"	.312"	Spiral	78	HGN10HGSTDK1	HGN10HGRSTDK5	_	HGN10HGSTDK
3-1/4"	12d	.135"	.344"	Spiral	75	HGN12HGSTDK1	HGN12HGRSTDK5	_	HGN12HGSTDK
3-1/2"	16d	.135"	.344"	Spiral	52	HGN16HGSTDK1	HGN16HGRSTDK5	HGN16HGSTDKBK	HGN16HGSTDK
4"	20d	_	_	Spiral	33	HGN16HGSTDK1	HGN16HGRSTDK5	_	_
OUT	DOO	R GALV	ANIZED						
2"	6d	.120"	.281"	Ring	138	HGN6OGRSDK1	HGN6OGRSDK5	_	_
2-1/2"	8d	.120"	.281"	Ring	106	HGN8OGRSDK1	HGN8OGRSDK5	_	HGN8OGRSDK
3"	10d	.135"	.297"	Ring	78	HGN100GRSDK1	HGN100GRSDK5	_	HGN100GRSDK
3-1/4"	12d	.135"	.297"	Ring	75	_	HGN12OGRSDK5	_	HGN12OGRSDK
3-1/2"	16d	.148"	.313"	Ring	52	HGN16OGRSDK1	HGN16OGRSDK5	_	HGN16OGRSDK
2"	6d	.113"	.297"	Spiral	138	HGN6OGSTDK1	HGN6OGSTDK5	_	_
2-1/2"	8d	.113"	.297"	Spiral	106	HGN8OGSTDK1	HGN8OGSTDK5	_	_
3"	10d	.128"	.312"	Spiral	78	HGN100GSTDK1	HGN10OGSTDK5	_	_
3-1/4"	12d	.135"	.344"	Spiral	75	HGN12OGSTDK1	HGN12OGSTDK5	_	_
3-1/2"	16d	.135"	.344"	Spiral	52	HGN16OGSTDK1	HGN16OGSTDK5	_	HGN16OGSTDK



# **Fence Staple**

For attaching wire and wire fence to wood fence posts.

- Can also be used to attach suspended ceiling grid to wood rafters
- Conforms to ASTM F1667-17







Leg	Gap Distance	Leg Diameter	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
нот	GALVA	NIZED				
3/4"	_	_	_	HGN34HGFS1	_	_
1-1/4"	.250"	.1483"	81	HGN114HGFS1	HGN114HGFS5	HGN114HGFS
1-1/2"	.250"	.1483"	71	HGN112HGFS1	HGN112HGFS5	HGN112HGFS
1-3/4"	.250"	.1483"	61	HGN134HGFS1	HGN134HGFS5	HGN134HGFS
2"	.250"	.1483"	53	_	HGN2HGFS5	HGN2HGFS

# **Poultry Net Staple**

For attaching poultry netting to wood frame.

- Narrow 3/16" inside spread to securely fasten poultry netting to wood post or frames
- Conforms to ASTM F1667-17

Available Finish





Leg	Gap Distance	Leg Diameter	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box				
HOT GALVANIZED										
3/4"	3/16"	.080"	413	HGN34HGPNS1	HGN34HGPNS5	HGN34HGPNS				



# **Finish Nail**

For attaching trim and moulding.

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Cupped head for ease of concealment
- Diamond point

**Available Finishes** 











		Shank	Head		Approx.	1 lb. Box	5 lb. Box	50 lb.
Siz	ze	Diameter	Diameter	Shank	count / lb.	12 / master	5 / master	Box
ELEC	CTR	GALV	ANIZED					
1-1/4"	3d	.067"	.099"	Smooth	693	HGN3EGF1	_	_
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4EGF1	HGN4EGF5	_
2"	6d	.092"	.135"	Smooth	267	HGN6EGF1	HGN6EGF5	_
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8EGF1	HGN8EGF5	_
3"	10d	.113"	.155"	Smooth	109	HGN10EGF1	HGN10EGF5	_
3-1/4"	12d	.113"	.155"	Smooth	90	_	HGN12EGF5	_
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16EGF1	HGN16EGF5	_
нот	GAL	VANIZE	Đ					
1-1/4"	3d	.067"	.099"	Smooth	693	HGN3HGF1	_	_
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4HGF1	HGN4HGF5	_
2"	6d	.092"	.135"	Smooth	267	HGN6HGF1	HGN6HGF5	HGN6HGF
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8HGF1	HGN8HGF5	HGN8HGF
3"	10d	.113"	.155"	Smooth	109	HGN10HGF1	HGN10HGF5	_
3-1/4"	12d	.113"	.155"	Smooth	90	HGN12HGF5	HGN12HGF5	_
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16HGF1	HGN16HGF5	_
OUT	DOO	R GALV	ANIZED	)				
1-1/2"	4d	.072"	.106"	Smooth	562	HGN4OGF1	HGN4OGF5	_
2"	6d	.092"	.135"	Smooth	267	HGN6OGF1	HGN6OGF5	_
2-1/2"	8d	.099"	.142"	Smooth	162	HGN8OGF1	HGN8OGF5	_
3"	10d	.113"	.155"	Smooth	109	HGN10OGF1	HGN10OG5	_
3-1/2"	16d	.120"	.162"	Smooth	84	HGN16OGF1	HGN16OGF5	_



# **Casing Nail**


For attaching trim, window, and door casing.

- Similar to finish nails but with slightly larger head and heavier gauge for window frames and door jambs
- Deep countersunk head sinks into wood, aids with concealment
- Diamond point
- Conforms to ASTM F1667-17







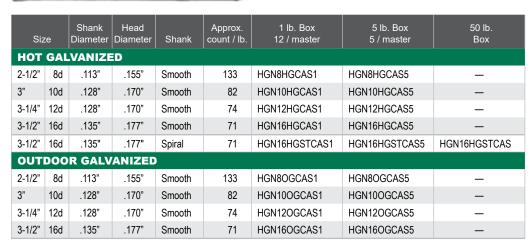





# **Box Nail**

For light-duty general construction, carpentry, and box making.

- Relatively thinner shank and sharp point minimize splitting in wood
- Smaller shank and head than common nails of the same length
- Flat head sits flush against surface
- · Diamond point
- Conforms to ASTM F1667-17











Siz	e	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
нот	GAL	VANIZE	D						
1-1/4"	3d	_	— — Smooth 478 HGN3HGBX1		_	_	_		
1-1/2"	4d	.080"	.219"	Smooth	374	HGN4HGBX1	HGN4HGBX5	_	_
1-3/4"	5d	.080"	.219"	Smooth	324	HGN5HGBX1	HGN5HGBX5	HGN5HGBXBK	_
2"	6d	.099"	.266"	Smooth	207	HGN6HGBX1	HGN6HGBX5	_	HGN6HGBX
2-1/4"	7d	.099"	.266"	Smooth	184	HGN7HGBX1	HGN7HGBX5	HGN7HGBXBK	HGN7HGBX
2-1/2"	8d	.113"	.297"	Smooth	125	HGN8HGBX1	HGN8HGBX5	HGN8HGBXBK	HGN8HGBX
3"	10d	.128"	.312"	Smooth	85	HGN10HGBX1	HGN10HGBX5	HGN10HGBXBK	HGN10HGBX
3-1/4"	12d	.128"	.312"	Smooth	77	HGN12HGBX1	HGN12HGBX5	HGN12HGBXBK	HGN12HGBX
3-1/2"	16d	.135"	.344"	Smooth	67	HGN16HGBX1	HGN16HGBX5	HGN16HGBXBK	HGN16HGBX
4"	20d	.148"	.375"	Smooth	49	HGN20HGBX1	HGN20HGBX5	HGN20HGBXBK	HGN20HGBX
OUT	DOO	R GALV	ANIZED	)					
1-1/4"	3d	.076"	.219"	Smooth	478	HGN3OGBX1	HGN3OGBX5	_	_
1-1/2"	4d	.080"	.219"	Smooth	374	HGN4OGBX1	HGN4OGBX5	_	_
1-3/4"	5d	.080"	.219"	Smooth	324	HGN5OGBX1	HGN5OGBX5	_	_
2"	6d	.099"	.266"	Smooth	207	HGN6OGBX1	HGN6OGBX5	_	HGN6OGBX
2-1/4"	7d	.099"	.266"	Smooth	184	HGN7OGBX1	HGN7OGBX5	HGN7OGBXBK	HGN7OGBX
2-1/2"	8d	.113"	.297"	Smooth	125	HGN8OGBX1	HGN8OGBX5	HGN8OGBXBK	HGN8OGBX
3"	10d	.128"	.312"	Smooth	85	HGN10OGBX1	HGN10OGBX5	_	HGN10OGBX
3-1/4"	12d	.128"	.312"	Smooth	77	HGN12OGBX1	HGN12OGBX5	_	HGN12OGBX
3-1/2"	16d	.135"	.344"	Smooth	67	HGN16OGBX1	HGN16OGBX5	_	HGN16OGBX
4"	20d	.148"	.375"	Smooth	49	HGN20OGBX1	HGN20OGBX5	_	HGN20OGBX





# **Common Nail**

For heavy-duty general construction and framing.

- Most versatile and popular style of nail
- Heavier shank provides greater resistance to bending
- Flat head seats flush against surface
- Diamond point
- Conforms to ASTM F1667-17















Siz	ze	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
ELEC	CTRO	GALV	ANIZED				,		
2-1/2"	8d	.131"	.281"	Smooth	104	_	HGN8EGC5	_	HGN8EGC
3-1/4"	12d	.148"	.312"	Smooth	_	_	_	_	HGN12EGC
3-1/2"	16d	.162"	.344"	Smooth	47	_	HGN16EGC	_	HGN16EGC
нот	GAL	VANIZE	D						
1-1/2"	4d	_	_	Smooth	290	HGN4HGC1	HGN4HGC5	_	HGN6HGC
2"	6d	.113"	.250"	Smooth	167	HGN6HGC1	HGN6HGC5	HGN6HGCBK	HGN6HGC
2-1/4"	7d	.113"	.266"	Smooth	141	HGN7HGC1	HGN7HGC5	_	_
2-1/2"	8d	.131"	.266"	Smooth	104	HGN8HGC1	HGN8HGC5	HGN8HGCBK	HGN8HGC
3"	10d	.148"	.312"	Smooth	67	HGN10HGC1	HGN10HGC5	HGN10HGCBK	HGN10HGC
3-1/4"	12d	.148"	.312"	Smooth	63	HGN12HGC1	HGN12HGC5	HGN12HGCBK	HGN12HGC
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16HGC1	HGN16HGC5	HGN16HGCBK	HGN16HGC
4"	20d	.192"	.406"	Smooth	29	HGN20HGC1	HGN20HGC5	HGN20HGCBK	HGN20HGC
4-/2""	30d	_	_	Smooth	110	_	HGN30HGC5	_	HGN30HGC
5"	40d	.226"	.469"	Smooth	80	_	HGN40HGC5	_	HGN40HGC
5-1/2"	50d	_	_	Smooth	65	_	_	_	HGN40HGC
6"	60d	.262"	.531"	Smooth	50	_	HGN60HGC5	_	HGN60HGC
OUT	DOO	R GALV	ANIZED					!	
2"	6d	.113"	.250"	Smooth	167	HGN6OGC1	HGN6OGC5	_	HGN6OGC
2-1/2"	8d	.131"	.281"	Smooth	104	HGN8OGC1	HGN8OGC5	_	HGN8OGC
3"	10d	.148"	.312"	Smooth	67	HGN10OGC1	HGN100GC5	_	HGN100GC
3-1/4"	12d	.148"	.312"	Smooth	63	HGN12OGC1	HGN12OGC5	HGN12OGCBK	HGN12OGC
3-1/2"	16d	.162"	.344"	Smooth	47	HGN16OGC1	HGN16OGC5	_	HGN16OGC
4"	20d	.192"	.406"	Smooth	29	HGN20OGC1	HGN20OGC5	_	HGN200GC
4-1/2"	30d	_	_	Smooth	22	_	HGN300GC5	_	_
5"	40d	_	_	Smooth	16	_	HGN400GC5	_	_
6"	60d	.262"	.531"	Smooth	10	_	HGN60OGC5	_	_
2"	6d	_	_	Ring	_	_	_	_	HGN6OGRSC
3-1/4"	12d	_	_	Ring	_	-	_	_	HGN12OGRSC
3-1/2"	16d	_	_	Ring	_	_	_	_	HGN160GRSC
4"	20d	_	_	Ring	_	_	_	_	HGN200GRSC



# **Joist Hanger Nail**

For attaching joist hangers to wood ledgers, headers and beams.

- · Heavy gauge allows more surface contact and greater holding power
- Flat head seats flush against surface
- Diamond point

Available Finishes











Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
НОТ	GALV	ANIZED						
2-1/2"	8	.313"	Smooth	62	HGN2128HGJH1	HGN2128HGJH5	_	_
1-1/4"	9	.313"	Smooth	149	HGN1149HGJH1	HGN1149HGJH5	_	HGN1149HGJH
1-1/2"	9	.281"	Smooth	125	HGN1129HGJH1	HGN1129HGJH5	HGN1129HGJBK	HGN1129HGJH
1-1/4"	10	_	Smooth	194	HGN11410HGJH1	_	_	_
1-1/2"	10	.281"	Smooth	165	HGN11210HGJH1	HGN11210HGJH5	HGN11210HGJBK	HGN11210HGJH
1-1/4"	11	.281"	Smooth	206	HGN11411HGJH1	HGN11411HGJH5	_	_
OUT	DOOR	GALVA	NIZED					
2-1/2"	8	_	Smooth	62	HGN2128OGJH1	HGN2128OGJH5	_	_
1-1/2"	9	.313"	Smooth	125	HGN1129OGJH1	HGN1129OGJH5	_	HGN1129OGJH
1-1/4"	10	.281"	Smooth	194	HGN11410OGJH1	_	_	_
1-1/2"	10	.281"	Smooth	165	HGN11210OGJH1	HGN112100GJH5	_	HGN11210OGJH





# **Spike**

For securing timbers and other similar landscaping materials.

- Checkered head to reduce hammer slipping
- Flat, countersunk head
- Diamond point
- Conforms to ASTM F1667-17

### **Available Finishes**










Size	Size Shank		5 lb. Box 5 / shipper	50 lb. Box						
HOT GALVANIZED										
8"	Smooth	19	HGN8HGSPK5	HGN8HGSPK						
10"	Smooth	16	HGN10HGSPK5	HGN10HGSPK						
12"	Smooth	13	HGN12HGSPK5	HGN12HGSPK						
OUTDOO	R GALV	ANIZED								
8"	Smooth	19	_	HGN8OGSPK						
10"	Smooth	16	_	HGN100GSPK						
12"	Smooth	13	_	HGN12OGSPK						



# **Timber Tie**

For securing timbers and other similar landscaping materials.

- Flat head sits flush against surface
- Diamond point









Siz	<u>r</u> e	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box			
НОТ	HOT GALVANIZED										
6"	60d	.1205"	.4375"	Spiral	10	HGN60HGTT5	HGN60HGTTBK	HGN60HGTT			
OUT	OUTDOOR GALVANIZED										
6"	60d	.1205"	.4375"	Spiral	10	HGN60OGTT5	<del>_</del>	_			

### HUTTIG-GRIP<sup>®</sup>

# **Cut Masonry Nail**

For attaching furring strips and other materials to cinder block, mortar joints, fresh concrete and brick walls.

- Tempered hardened steel for harder, less brittle nail
- Blunt point and tapered shank minimize splitting in wood
- Flat, rectangular head









# **Masonry Stub Nail**

For applications where a smooth masonry style nail is required.

- Tempered hardened steel for harder, less brittle nail
- Larger head compared to standard masonry nails
- Smooth shank
- Diamond point

Available Finish





Size	Gauge	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
ELEC	TRO G	ALVANI	ZED - TE	MPERED	HARDENED ST	EEL	
3/8"	9	3/8"	Smooth	391	_	HGN38EGSTB5	<del>_</del>
1/2"	9	3/8"	Smooth	335	HGN12EGSTB1	HGN12EGSTB5	HGN12EGSTB
3/4"	9	3/8"	Smooth	248	HGN34EGSTB1	HGN34EGSTB5	HGN34EGSTB
1"	_	_	Smooth	186	_	HGN1EGSTB5	HGN1EGSTB
1-1/2"	_	_	Smooth	128	_	HGN112EGSTB5	HGN112EGSTB



### **Pole Barn Nail**

For attaching wall framing lumber to pole barn posts.


- Tempered hardened steel for harder, less brittle nail
- Flat head seats flush against surface
- · Diamond point
- Conforms to ASTM F1667-17









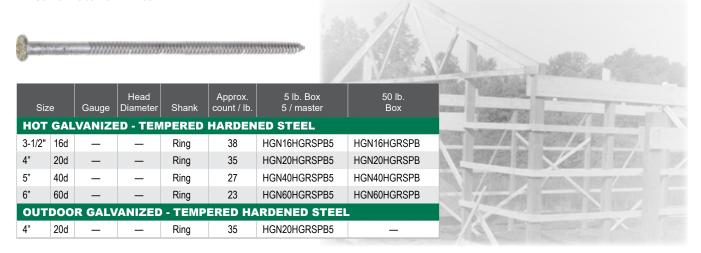



# **Fine Nail**

For use with thin pieces of wood.

- Smooth, slender nail to minimize splitting narrow strips of wood
- · Smooth, flat head
- · Diamond point

Available Finish

Available Finish

HG



Size		Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
ELECTRO GALVANIZED								
1-1/8"	3d	.062"	.156"	Smooth	757	HGN3EGFINE1	HGN3EGFINE5	HGN3EGFINE

### **Lobster Pot Nail**

For construction and repair of lobster crates.

- · Smooth, slender nail to minimize splitting narrow strips of wood
- Smooth, flat head
- Diamond point





## **Roofing Nail**

For attaching roofing felt, insulation board, or asphalt shingles.

- Electro galvanized also used for hanging vinyl siding
- Large, flat head and heavy gauge for greater holding power
- Diamond point
- Conforms to ASTM F1667-17











Size	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	50 lb. Box
ELEC	TRO G	ALVANIZ	ZED						
1/2"	_	_	_	Smooth	375	HGN12EGRF1	_	_	_
3/4"	11	.120"	.375"394"	Smooth	323	HGN34EGRF1	HGN34EGRF5	_	HGN34EGRF
7/8"	11	.120"	.375"394"	Smooth	300	HGN78EGRF1	HGN78EGRF5	HGN78EGRFBK	HGN78EGRF
1"	11	.120"	.281"394"	Smooth	261	HGN1EGRF1	HGN1EGRF5	HGN1EGRFBK	HGN1EGRF
1-1/4"	11	.120"	.312"394"	Smooth	209	HGN114EGRF1	HGN114EGRF5	HGN114EGRFBK	HGN114EGRF
1-1/2"	11	.120"	.375"394"	Smooth	194	HGN112EGRF1	HGN112EGRF5	HGN112EGRFBK	HGN112EGRF
1-3/4"	11	.120"	.375"394"	Smooth	155	HGN134EGRF1	HGN134EGRF5	HGN134EGRFBK	HGN134EGRF
2"	11	.120"	.375"394"	Smooth	136	HGN2EGRF1	HGN2EGRF5	HGN2EGRFBK	HGN2EGRF
2-1/2"	11	.120"	.375"394"	Smooth	109	HGN212EGRF1	HGN212EGRF5	HGN212EGRFBK	HGN212EGRF
3"	11	.120"	.375"394"	Smooth	92	HGN3EGRF1	HGN3EGRF5	HGN3EGRFBK	HGN3EGRF
7/8"	_	_	_	Ring	_	_	HGN78EGRSRF5	_	_
1"	_	_	_	Ring	_	_	HGN1EGRSRF5	_	_
1-1/4"	_	_	_	Ring	_	_	HGN114EGRSRF5	_	HGN114EGRSRI
1-1/2"	_	_	_	Ring	_	_	HGN112EGRSRF5	_	_
1-3/4"				Ring	_	_	HGN134EGRSRF5	_	_
нот	GALVA	NIZED							
3/4"	11	.120"	.375"394"	Smooth	315	HGN34HGRF1	HGN34HGRF5	HGN34HGRFBK	_
7/8"	11	.120"	.375"394"	Smooth	288	HGN78HGRF1	HGN78HGRF5	_	HGN78HGRF
1"	11	.120"	.375"394"	Smooth	254	HGN1HGRF1	HGN1HGRF5	HGN1HGRFBK	HGN1HGRF
1-1/4"	11	.120"	.375"394"	Smooth	196	HGN114HGRF1	HGN114HGRF5	HGN114HGRFBK	HGN114HGRF
1-1/2"	11	.120"	.375"394"	Smooth	163	HGN112HGRF1	HGN112HGRF5	HGN112HGRFBK	HGN112HGRF
1-3/4"	11	.120"	.375"394"	Smooth	148	HGN134HGRF1	HGN134HGRF5	HGN134HGRFBK	HGN134HGRF
2"	11	.120"	.375"394"	Smooth	120	HGN2HGRF1	HGN2HGRF5	HGN2HGRFBK	HGN2HGRF
2-1/2"	11	.120"	.375"394"	Smooth	106	HGN212HGRF1	HGN212HGRF5	HGN212HGRFBK	HGN212HGRF
3"	11	.120"	.375"394"	Smooth	85	HGN3HGRF1	HGN3HGRF5	HGN3HGRFBK	HGN3HGRF



### **HUTTIG-GRIP**

## **Plastic Cap Nail**

For attaching tar paper, felt paper, synthetic underlayment, housewrap, and insulation foam board.

- Plastic cap helps to reduce pull-through and tears in building materials and other substrates
- Designed to distribute maximum holding power to the perimeter of the cap
- Diamond point
- Complies to ASTM F1667-17



Available Finish



Size	Shank Diameter	Cap Diameter	Head	Shank	Approx. count / lb.	1 lb. Box 5 / master	Bucket	Bucket Quantity	2,000 piece Box
ELEC	TRO G	ALVANIZ	ED						
3/4"	.106"	1"	Round	Ring	362	<u> </u>	HGN34PCBK	3,000	HGN34PC
7/8"	.106"	1"	Round	Ring	339	HGN78PC1	HGN78PCBK	3,000	HGN78PC
1"	.106"	1"	Round	Ring	323	HGN1PC1	HGN1PCBK	3,000	HGN1PC
1-1/4"	.106"	1"	Round	Ring	269	HGN114PC1	HGN114PCBK	2,500	HGN114PC
1-1/2"	.106"	1"	Round	Ring	185	HGN112PC1	HGN112PCBK	2,500	HGN112PC
1-3/4"	.106"	1"	Round	Ring	168	HGN134PC1	HGN134PCBK	2,000	_
2"	.106"	1"	Round	Ring	153	HGN2PC1	HGN2PCBK	2,000	_
2-1/2"	.106"	1"	Round	Ring	133	HGN212PC1	HGN212PCBK	2,000	HGN212PC
3"	.106"	1"	Round	Ring	117	HGN3PC1	HGN3PCBK	1,500	_





### **Metal Cap Nail**

For attaching tar paper, felt paper, synthetic underlayment, housewrap, insulation foam board, and built-up and modified roofing.

- · Oversized head, ringed shank provide enhanced holding power
- Diamond point
- Complies to ASTM F1667-17



Size	Gauge	Head	Shank	Approx.	3 lb. Box 5 / master	25 lb. Box	50 lb. Box
ELEC	TRO GA	LVANIZ	ED				
7/8""	_	Round	Ring	112	HGN78MRC3	HGN78MRC25	HGN78MRC
1"	12	Round	Ring	107	HGN1MRC3	HGN1MRC25	HGN1MRC
1-1/4"	12	Round	Ring	100	HGN114MRC3	HGN114MRC25	_
1-1/2"	12	Round	Ring	84	HGN112MRC3	HGN112MRC25	HGN112MRC
1-3/4"	12	Round	Ring	79	HGN134MRC3	HGN134MRC25	HGN134MRC
2"	12	Round	Ring	74	HGN2MRC3	HGN2MRC25	HGN2MRC
2-1/2"	11	Round	Ring	57	HGN212MRC3	HGN212MRC25	HGN212MRC
3"	11	Round	Ring	60	HGN3MRC3	HGN3MRC25	HGN3MRC
4"	_	Round	Ring	_	_	HGN4MRC25	_
5"	_	Round	Ring	_	_	HGN5MRC25	_
7/8"	12	Square	Ring	88	HGN78MSQC3	HGN78MSQC25	HGN78MSQC
1"	12	Square	Ring	85	HGN1MSQC3	HGN1MSQC25	HGN1MSQC
1-1/4"	12	Square	Ring	81	HGN114MSQC3	HGN114MSQC25	HGN114MSQC

### **Tin Caps**

For use with fasteners for increased bearing surface with materials such as felt paper or sheets of foam board-type insulation products.



Approximate Size		Approx. Thickness count / lb.		1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
Medium	2"	0.200 mm	152	HGNMEDTIN1	HGNMEDTIN5	HGNMEDTIN
Large	2-1/2"	0.200 mm	95	HGNLARGETIN1	HGNLARGETIN5	HGNLARGETIN

Available Finish





### **Aluminum Roofing Nail with Neoprene Washer**

For attaching corrugated metal and fiberglass panels.

- Neoprene-bonded washer creates a seal against the surface, prevents moisture from entering the hole
- · Checkered head for paint adherence and to refract light
- · Ring shank for enhanced holding power
- · Diamond point
- Manufactured from the highest quality 5056 aluminum
- · High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails







Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 5 / master
ALUM	INUM				
1-3/4"	.134"	7/16"	Ring	368	HGN134ALNEO1

### **Roofing Nail with Neoprene Washer**

For attaching corrugated metal and fiberglass panels.

- Neoprene-bonded washer creates a seal against the surface, prevents moisture from entering the hole
- · Checkered head for paint adherence and to refract light
- Ring shank for enhanced holding power
- Diamond point



Size	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
ELEC	TRO GA	LVANIZ	ED				
1-1/2"	.135"	.375"	Ring	118	HGN112EGRNEO1	HGN112EGRNEO5	HGN112EGRNEO
1-3/4"	.135"	.375"	Ring	107	HGN134EGRNEO1	HGN134EGRNEO5	HGN134EGRNEO
2"	.135"	.375"	Ring	96	HGN2EGRNEO1	HGN2EGRNEO5	_
2-1/2"	_	_	Ring	80	_	HGN212EGRNEO5	_
нот	GALVAN	IIZED					
1-3/4"	.135"	.375"	Ring	107	HGN134HGRNEO1	HGN134HGRNEO5	HGN134HGRNEO

Available Finishes







### **Shake Nail**

For installing woven shingle corners and similar applications with smaller pieces of wood and minimized nail visibility.

- Smaller, smooth head for inconspicuous finish
- Thin ring shank and blunt point reduce splitting in wood



Available Finishes



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
нот	GALVA	NIZED					
1-3/4"	.080"	.156"	Ring	404	HGN134HGRSSHK1	HGN134HGRSSHK5	HGN134HGRSSHK
2"	.080"	.156"	Ring	354	HGN2HGRSSHK1	_	_
1-3/4"	.080"	.156"	Smooth	404	HGN134HGSHK1	HGN134HGSHK5	_
2"	.080"	.156"	Smooth	354	HGN2HGSHK1	HGN2HGSHK5	

### **Shingle Nail**

For attaching wood shakes and wood shingles.

- Larger head provides greater pull-through resistance
- Diamond point







Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
нот	GALVA	NIZED					
1-1/4"	.092"	.250"	Smooth	425	HGN114HGSHGL1	HGN114HGSHGL5	_
1-3/8"	.099"	.281"	Smooth	345	HGN138HGSHGL1	HGN138HGSHGL5	_
1-1/2"	.106"	.281"	Smooth	271	HGN112HGSHGL1	_	HGN112HGSHGL



**Available Finishes** 

OG

HG

### **Wood and Hardboard Siding Nail**

For attaching wood and hardboard siding.

- · Checkered head for paint adherence and to refract light
- · Stiffened shank for enhanced holding power
- Diamond point
- Conforms to ASTM F1575-17



Siz	е	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	30 lb. Bucket	30 lb. Bucket
нот	GAL	VANIZE	D						
2"	6d	.113"	.219"	Smooth	173	HGN6HGHBS1	HGN6HGHBS5	_	_
2-1/4"	7d	.113"	.219"	Smooth	156	HGN7HGHBS1	HGN7HGHBS5	_	_
2-1/2"	8d	.113"	.219"	Smooth	140	HGN8HGHBS1	HGN8HGHBS5	_	_
3"	10d	.113"	.219"	Smooth	108	HGN10HGHBS1	HGN10HGHBS5	_	_
3-1/2"	16d	.113"	.219"	Smooth	80	HGN16HGHBS1	_	_	HGN16HGHBS
2"	6d	.113"	.219"	Spiral	173	HGN6HGSTHBS1	HGN6HGSTHBS5	_	HGN6HGSTHBS
2-1/4"	7d	.113"	.219"	Spiral	156	HGN7HGSTHBS1	HGN7HGSTHBS5	_	HGN7HGSTHBS
2-1/2"	8d	.113"	.219"	Spiral	140	HGN8HGSTHBS1	HGN8HGSTHBS5	HGN8HGSTHBSBK	HGN8HGSTHBS
3"	10d	.113"	.219"	Spiral	108	HGN10HGSTHBS1	HGN10HGSTHBS5	_	HGN10HGSTHBS
3-1/4"	12d	_	_	Spiral	108	HGN12HGSTHBS1	_	_	_
3-1/2"	16d	.113"	.219"	Spiral	80	HGN16HGSTHBS1	HGN16HGSTHBS5	_	_
OUT	D00	R GALV	ANIZED						
2"	6d	.113"	.219"	Smooth	173	HGN6OGHBS1	HGN6OGHBS5	_	_
2-1/4"	7d	.113"	.219"	Smooth	156	HGN7OGHBS1	_	_	_
2-1/2"	8d	.113"	.219"	Smooth	140	HGN8OGHBS1	HGN8OGHBS5	_	_
2-1/2"	8d	.113"	.219"	Spiral	140	HGN8OGSTHBS1	HGN8OGSTHBS5	_	_

### **No-Split Wood Siding Nail**

For use with split-prone woods.

- · Checkered head for paint adherence and to refract light
- · Thin, ringed shank and blunt point minimize splitting in wood
- Conforms to ASTM F1575-17



Siz	:e	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
нот	GAL	VANIZE	D				
1-3/4"	5d	.113"	.219"	Ring	323	HGN5HGRSSPS1	HGN5HGRSSPS5
2"	6d	.113"	.219"	Ring	283	HGN6HGRSSPS1	HGN6HGRSSPS5
2-1/2"	8d	.113"	.219"	Ring	189	HGN8HGRSSPS1	HGN8HGRSSPS5
3"	10d	_	_	Ring	153	HGN10HGRSSPS1	HGN10HGRSSPS5

**Available Finishes** 







## **Aluminum Siding Nail**

For attaching aluminum, vinyl, or steel siding.

- Large, flat head for greater holding power
- Diamond point
- Manufactured from the highest quality 5056 aluminum
- High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails



Available Finish





### **Aluminum Trim Nail**

For attaching redwood and cedar soffit, fascia, and aluminum trim coil.

- Diamond point
- Manufactured from the highest quality 5056 aluminum
- High count per pound! Approximately 3X as many pieces per pound than galvanized steel nails
- Available painted with premium baked enamel paints.



Siz	e	Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	Color	1 lb. Box 5 / master		
ALUI	ALUMINUM									
1-1/4"	3d	13	.099"	3/16"	Smooth	1,090	Brown	HGN114ALTRBW1		
1-1/4"	3d	13	.099"	3/16"	Smooth	1,090	White	HGN114ALTRWH1		



Available Finish

Cu

## **Copper Roofing Nail**

For installation of slate, tile and copper roofing.

- Also known as copper slating nails
- Shank diameter fits pre-formed tile and slate holes
- Larger head covers tile holes
- Top quality CDA-110 copper
- · Conforms to ASTM B49



Size	Gauge	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
COPI	PER						
1"	11	7/16"	Smooth	240	HGN1CPRRF1	HGN1CPRRF5	<del>_</del>
1-1/4"	11	7/16"	Smooth	148	HGN114CPRRF1	HGN114CPRRF5	_
1-1/2"	11	7/16"	Smooth	123	HGN112CPRRF1	HGN112CPRRF5	HGN112CPRRF
2"	11	7/16"	Smooth	110	_	HGN2CPRRF5	_

### **Tile Roofing Nail**

For securing roofing tiles.

- · Oversized head provides expanded holding power to hold down roofing tiles
- Long shank inserts through holes pre-drilled in tile
- Diamond point

Available Finish





Size	Gauge	Head Diameter	Shank	Approx. count / lb.	5 lb. Box 5 / master	50 lb. Box				
ELEC	ELECTRO GALVANIZED									
4"	8	.468"	Smooth	250	<u> </u>	HGN4EGTLRF				
5"	8	.468"	Smooth	190	<del>-</del>	HGN5EGTLRF				
5-1/2"	8	.468"	Smooth	180	HGN512EGTLRF5	HGN5EGTLRF				
6"	8	.468"	Smooth	160	HGN6EGTLRF5	HGN6EGTLRF				



## **Furring Nail with wad**

For attaching stucco wire mesh to the exterior wall for application of stucco mud.

- For use with flat wire lath that is not furred (wadding is not pre-attached)
- Spacer on the nail creates a gap between the wire lath and the wall for space for the cement
- Smooth, flat head
- Diamond point



with wad



Available Finish





### **Drywall Nail**

For attaching sheets of drywall to wood studs.

- Thin, broad head sits flush against surface
- Ring shank for greater holding power
- Long diamond point reduces tearing of drywall paper
- Conforms to ASTM C514



Available Finishes









Size	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
BRIGHT							
1-1/4"	.099"	11/32"	Ring	339	HGN114RSDWN1	HGN114RSDWN5	HGN114RSDWN
1-3/8"	.099"	11/32"	Ring	320	HGN138RSDWN1	HGN138RSDWN5	HGN138RSDWN
1-1/2"	_	_	Ring	288	HGN112RSDWN1	_	_
1-5/8"	.099"	11/32"	Ring	260	HGN158RSDWN1	HGN158RSDWN5	HGN158RSDWN
2"	_	_	Ring	224	<u> </u>	HGN2RSDWN5	_
BLUED							
1-3/8"	.099"	11/32"	Ring	316	HGN138BLRSDW1	HGN138BLRSDW5	_
1-5/8"	.099"	11/32"	Ring	295	HGN158BLRSDW1	HGN158BLRSDW5	_
VINYL COAT	ED						
1-3/8"	_	_	Smooth	_	HGN112CDWN1	HGN112CDWN5	_
1-5/8"	_	_	Smooth	_	HGN134CDWN1	HGN134CDWN5	HGN134CDWN
1-5/8"	_	_	Smooth	_	_	HGN2CDWN5	_

### **Drywall Nail - Cupped Head**

For attaching sheets of drywall to wood studs.

- Cupped head sinks into surface, accepts joint compound
- Slightly heavier shank than standard drywall nails
- Smooth shank and long diamond point reduces tearing of drywall paper
- Phosphate coating reduces friction, binds with joint compounds and paint
- Conforms to ASTM C514



Available Finish



Size	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	50 lb. Box
PHOSPHATE	COATE	D					
1-1/4"	.106"	11/32"	Smooth	340	_	_	HGN114PCCHDW
1-3/8"	.106"	11/32"	Smooth	335	HGN138PCCHDW1	HGN138PCCHDW5	HGN138PCCHDW
1-5/8"	.106"	11/32"	Smooth	315	HGN158PCCHDW1	HGN158PCCHDW5	HGN158PCCHDW
1-7/8"	.106"	11/32"	Smooth	264	HGN178PCCHDW1	HGN178PCCHDW5	HGN178PCCHDW
2-3/8"	.106"	11/32"	Smooth	148	_	HGN238PCCHDW5	_

### **HUTTIG-GRIP**

### **Lath Nail**

For attaching wood lath strips to wood studs.


- Smooth, slender nail to minimize splitting narrow strips of lath
- Heat sterilization process creates blue oxide film, more resistant to corrosion from wet plaster
- Smooth, flat head
- Diamond point



Size	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master				
BLUI	BLUED									
1-1/8"	_	_	Smooth	984	HGN118BLLTH1	HGN118BLLTH5				
1-1/4"	_	_	Smooth	365	HGN114BLLTH1	HGN114BLLTH5				

Available Finish





## **HUTTIG-GUARD**<sup>™</sup> Stainless Steel

**Limited Lifetime Fastener Warranty** 

Recommended for use outdoors, with treated lumber, and in other high-corrosive environments.



### **305 STAINLESS STEEL**

recommended for use with:







### 316 STAINLESS STEEL

recommended for use with:











#### **GENERAL CONSTRUCTION NAIL**

### **APPLICATIONS**

- Decks
- Docks
- Fences
- Framing
- General Construction
- Joists
- Trim Wood, PVC, or Composite

#### **STYLES**

- Box Nails
- Finish Nails
- Common Nails
- **Joist Hanger Nails**
- Deck Nails
- Trim Nails

#### **ROOFING/SIDING NAILS**

### **APPLICATIONS**

- - Cedar Shake Roofing
- Fascia, Soffit, Trim ■ Wood Siding Aluminum, Vinyl, or Composite

### **STYLES**

- No-Split Wood Siding Nails
- **Roofing Nails**
- **Shake Nails Trim Nails**

# **Construction Fasteners**

### **HUTTIG-GUARD™ STAINLESS STEEL NAILS**

Stainless Steel - Fence/Deck	.41
Stainless Steel - Finish/Trim	
Stainless Steel - Framing	.43
Stainless Steel - Roofing/Siding	
Stainless Steel - Siding	

### **Stainless Steel Deck Nail**

For deck, patio, fence, and other outdoor construction.

- Flat head seats flush against surface
- Ring shank for use in softer woods and where vibration may be a factor
- · Spiral shank for use with harder woods and near board ends to minimize splitting
- · Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.



Siz	e	Gauge	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket		
304	304 STAINLESS STEEL										
2"	6d	_	_	_	Ring	152	HGG6SSRSDK1	_	_		
2-1/2"	8d	10	.134"	9/32"	Ring	122	HGG8SSRSDK1	HGG8SSRSDK5	HGG8SSRSDKBK		
3"	10d	9	.148"	5/16"	Ring	84	HGG10SSRSDK1	HGG10SSRSDK5	_		
3-1/2"	16d	8	.165"	11/32"	Ring	58	HGG16SSRSDK1	HGG16SSRSDK5	_		
3"	10d	_	_	_	Spiral	84	HGG10SSSTDK1	_	_		
316	STAI	NLESS	STEEL								
2-1/2"	8d	_	_	_	Ring	122	HGG8SSRSDK61	HGG8SSRSDK65	_		
3-1/4"	12d	_	_	_	Ring	77	HGG12SSRSDK61	_	_		
3-1/2"	16d	_	_	_	Ring	58	HGG16SSRSDK61	HGG16SSRSDK65	_		



42

### **Stainless Steel Finish Nail**

For use with exterior wood, PVC, and composite trim and finish work

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Cupped head for ease of concealment
- Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.

Size		Gauge	Shank Diameter	Head Diameter	Shank	Approx. count / lb.	1 lb. Box 12 / master			
304 STAINLESS STEEL										
1-3/4"	5d	13	.072"	.095"	Smooth	279	HGG5SSF1			
2-1/2"	8d	12	.135"	.109"	Smooth	163	HGG8SSF1			
316	STAI	NLESS	STEEL							
2"	6d				Smooth		HGG6SSF61			
2-1/2"	8d				Smooth		HGG8SSF61			

### **Stainless Steel Trim Nail**

For attaching soffit, fascia, and other cedar, aluminum, vinyl, or composite exterior trim.

- Thin shank to minimize splitting narrow pieces of wood, hole easier to conceal
- Smaller, smooth head for inconspicuous finish
- Available painted with premium baked enamel paints
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.






### **Stainless Steel Common Nail**

For heavy-duty general construction and framing.

- · Most versatile and popular style of nail
- · Heavier shank provides greater resistance to bending
- · Flat head seats flush against surface
- · Diamond point
- Conforms to ASTM F1667-17
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.



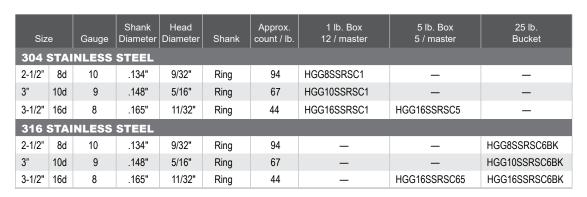


### **Stainless Steel Joist Hanger Nail**

For attaching joist hangers to wood ledgers, headers and beams.

- Heavy gauge allows more surface contact and greater holding power
- · Flat head seats flush against surface
- Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.








### **HUTTIG-GUARD**

### **Stainless Steel Roofing Nail**

For attaching asphalt, dimensional, or wood shingles.

- Large, flat head and larger shank diameter for greater holding power
- Ring shank for enhanced holding power
- Diamond point
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.



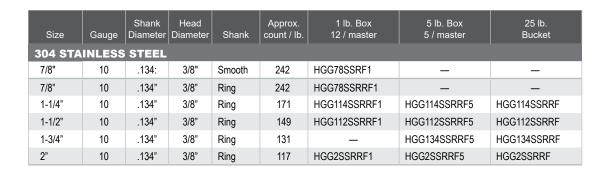

### **Stainless Steel Shake Siding Nail**

For use with cedar shake and shingle applications.

- Larger head provides greater pull-through resistance
- Thin, ringed shank for enhanced holding power with minimized splitting
- Diamond point
- Limited lifetime fastener warranty. See www.huttig-grip.com/warranty for complete details.



Siz	e	Gauge	Shank Diameter	Head Diameter	Shank	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	
304 STAINLESS STEEL										
1-1/2"	4d	14	.083"	1/8"	Ring	402	HGG112SSRSSHK1	HGG112SSRSSHK5	HGG112SSRSSHKBK	
1-3/4"	5d	14	.083"	1/8"	Ring	346	HGG134SSRSSHK1	HGG134SSRSSHK5	_	
2"	6d	14	.083"	1/8"	Ring	310	HGG2SSRSSHK1	HGG2SSRSSHK5	HGG2SSRSSHKBK	
316	STAI	NLESS	STEEL							
1-1/2"	4d	14	.083"	1/8"	Ring	402	HGG112SSRSSHK61	HGG112SSRSSHK65	_	
2"	6d	14	.083"	1/8"	Ring	310	_	HGG134SSSHK65	_	

## **Stainless Steel No-Split Wood Siding Nail**

For use with split-prone woods.

- · Checkered head for paint adherence and to refract light
- Thin, ringed shank and blunt point minimize splitting in wood
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.





Siz	e	Gauge	Shank Diameter	Head Diameter	Shank	Color	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
304	STA	INLESS	STEEL	<u> </u>						
1-1/4"	3d	14	.083"	.1562"	Ring	_	413	HGG3SSRSSPS1	HGG3SSRSSPS5	HGG4SSRSSPSBK
1-1/2"	4d	14	.083"	.1562"	Ring	_	369	HGG4SSRSSPS1	HGG4SSRSSPS5	_
1-3/4"	5d	14	.083"	.1712"	Ring	_	355	HGG5SSRSSPS1	HGG5SSRSSPS5	HGG5SSRSSPSBK
2"	6d	13	.095"	.1875"	Ring	_	242	HGG6SSRSSPS1	HGG6SSRSSPS5	HGG6SSRSSPSBK
2-1/4"	7d	_	_	_	Ring	_	220	HGG7SSRSSPS1	HGG7SSRSSPS5	HGG7SSRSSPSBK
2-1/2"	8d	13	.095"	.1875"	Ring	_	198	HGG8SSRSSPS1	HGG8SSRSSPS5	HGG8SSRSSPSBK
3"	10d	12	.109"	.2031"	Ring	_	120	HGG10SSRSSPS1	HGG10SSRSSPS5	HGG10SSRSSPSBK
3-1/4"	12d	_	_	_	Ring	_	110	HGG12SSRSSPS1	HGG12SSRSSPS5	_
3-1/2"	16d	10	.134"	.2188"	Ring	_	72	HGG16SSRSSPS1	HGG16SSRSSPS5	_
2"	6d	_	_	_	Ring	White	242	HGG6SSRSSPSWH1		_
2-1/2"	8d	_	_	_	Ring	White	198	HGG8SSRSSPSWH1		_
316	STA	INLESS	STEEL							
1-1/2"	4d	14	.083"	.1562"	Ring	_	360	HGG4SSRSSPS61	HGG4SSRSSPS65	_
1-3/4"	5d	14	.083"	.1712"	Ring	_	355	HGG5SSRSSPS61	HGG5SSRSSPS65	HGG5SSRSSPS6BK
2"	6d	13	.095"	.1875"	Ring	_	242	HGG6SSRSSPS61	HGG6SSRSSPS65	_
2-1/4"	7d	_	_	_	Ring	_	220	HGG7SSRSSPS61	HGG7SSRSSPS65	_
2-1/2"	8d	13	.095"	.1875"	Ring	_	198	HGG8SSRSSPS61	HGG8SSRSSPS65	_
3"	10d	_	_	_	Ring	_	120	HGG10SSRSSPS61	HGG10SSRSSPS65	_
3-1/4"	12d	_	_	_	Ring	_	110	HGG12SSRSSPS61	HGG12SSRSSPS65	_
3-1/2"	16d	10	.134"	.2188"	Ring	_	72	HGG16SSRSSPS61	HGG16SSRSSPS65	_

### **HUTTIG-GRIP** & **HUTTIG-GUARD** WOOD SCREWS

All Huttig-Guard and Huttig-Grip wood screws are designed to provide superior penetration, grip and strength—all while reducing effort, head-pops, breaks and splitting.

#### **HEAD**

Huttig-Grip All Purpose and Huttig-Guard outdoor screws have flat heads with nibs, while others use bugle heads.

- - · designed for use with wood; bugle head is best for drywall applications, tucks drywall paper under the head
  - dramatically reduces head pops when driving fasteners into wood; bugle head intended to sink into softer materials, prone to breaking especially when used with harder woods
- Nibs help to "seat" the head into wood for flat, smooth installation surface
- HUTTIG-GUARD Platinum Outdoor Screws feature a Double Countersink Flat head with Nibs for ultimate seating in wood





#### DRIVE

Huttig-Grip All Purpose and Huttig-Guard screws have a star drive versus Phillips.

- Star drive is a "positive" drive; keeps driving tool in place, even with high torque
- 12-point contact with bit
- Eliminates head spin outs
- FREE star drive bit with all Huttig-Guard screws






#### **THREAD**

Huttig-Grip All Purpose and Huttig-Guard wood screws have coarse, serrated thread.\*

Serrated threads reduce the torque needed to drive the screw without reducing holding power



#### **KNURLED SHANK**

HUTTIG-GUARD Platinum Outdoor Screws feature a knurled shank; reams hole in board reducing drag on shank & driving tool for faster, easier penetration



#### POINT

Huttig-Grip All Purpose and Huttig-Guard screws have a Type 17 point versus standard sharp point.

- Type 17 point was originally designed for the hardwood wood-working industry
- "Drills" through wood; penetrates some of the hardest woods faster, eliminates splitting at board ends
- Quickly starts wood penetration without "walking", also cuts wood fibers when driving for faster initial

**HUTTIG-GUARD Platinum Screws feature a Type 17 Long point for even faster, easier penetration** 

Designed for use with thicker pieces of hardwood where more material will be displaced, fluting helps to move chips out of the hole



TYPE 17 LONG POINT

Huttig-Grip All Purpose and Huttig-Guard wood screws are made of heavy gauge wire.

- Superior holding power
- Eliminates head pops and screws breaking during drilling



# **Wood & Exterior Screws**

### **HUTTIG-GRIP™& HUTTIG-GUARD™**



Product availability varies by location.

www.huttig-grip.com

## **HUTTIG-GRIP**<sup>™</sup> Wood Screws

GENERAL CONSTRUCTION

### **WOOD** SCREWS

Indoors or environments where fastener will not be directly exposed to moisture or other potentially corrosive conditions. Limited or no resistance to corrosion.

APPLICATIONS FINISH

CabinetsShelving

Most wood-to-wood applications





## **Wood & Exterior Screws**

### **HUTTIG-GRIP** WOOD SCREWS

All P	urpose	52
Gene	eral Construction	52







### **All Purpose Screw**

For all wood-to-wood applications.

- 12-point star drive for better engagement, more torque
- Flat, countersink head with nibs for fewer head pops, smoother finish
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods











Available Finish



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket					
YELLOW ZINC										
1" x 8	T-20 Star	278	HGS1YAP1	HGS1YAP5	_					
1-1/4" x 8	T-20 Star	278	HGS114YAP1	HGS114YAP5	HGS114YAP25					
1-5/8" x 8	T-20 Star	217	HGS158YAP1	HGS158YAP5	HGS158YAP25					
2" x 8	T-20 Star	175	HGS2YAP1	HGS2YAP5	HGS2YAP25					
2-1/2" x 9	T-25 Star	110	HGS212YAP1	HGS212YAP5	HGS212YAP25					
3" x 9	T-25 Star	90	HGS3YAP1	HGS3YAP5	HGS3YAP25					
3-1/2" x 10	T-25 Star	55	HGS312YAP1	HGS312YAP5	HGS312YAP25					
4" x 10	T-25 Star	52	HGS4YAP1	HGS4YAP5	HGS4YAP25					

### **General Purpose Screw**

For non-load bearing wood-to-wood applications..

- Also for attaching sheets of drywall to wood studs.
- Bugle-shaped head countersinks into softer materials, compacts material beneath, for smooth finish.
- Sharp point, coarse thread for use with wood.











Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 5 / master	Bulk Box	Box Quantity
YELLOW ZIN	NC O				
1-1/4" x 6	Sharp	278	_	HGS114CGSW8M	8,000
1-5/8" x 6	Sharp	217	_	HGS158CGSW5M	5,000
2" x 7	Sharp	175	_	HGS2CGSW35M	3,500
2-1/2" x 8	Sharp	110	_	HGS212CGSW25M	2,500
3" x 8	Sharp	90	_	HGS3CGSW1M	1,000
5" x 10	Sharp	40	HGS5CGSW1	HGS5CGSW500	500
6" x 10	Sharp	30	_	HGS6CGSW500	500


Available Finish





# **HUTTIG-GUARD**<sup>™</sup> Exterior Screws

Recommended for use with wood, outside and in more corrosive environments.

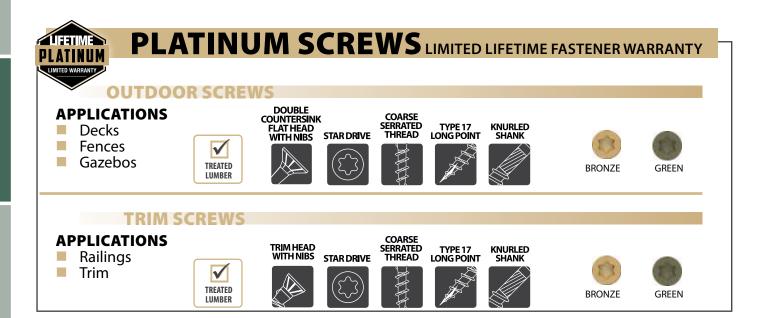



# **Wood & Exterior Screws**

### **HUTTIG-GUARD** EXTERIOR SCREWS

Platinum Lifetime - Decking	. 56
Platinum Lifetime - Trim	
Premium 50 Year - Decking	.58
Premium 50 Year - Composite Decking	60





### **Platinum Outdoor Screw**

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head sits flush. Nibs help to pull material from the hole, and to "seat" the head for smoother finished surface.
- Coarse, serrated thread cuts through wood using less torque
- Knurled shank for reduced drag, faster, easier penetration\*
- Type 17 long point fluting moves more chips out of the hole
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details















#### Available colors:









Length x Gauge	Drive	Approx.	1 lb. Box 12 / master	1 lb. Box 5 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
BRONZE								
1-1/4" x 8	T-20 Star	216	HGG114PLTBZ1	_	HGG114PLTBZ5	HGG114PLTBZ25	HGG114PLTBZ8M	8,000
1-5/8" x 8	T-20 Star	162	HGG158PLTBZ1	_	HGG158PLTBZ5	HGG158PLTBZ25	HGG158PLTBZ5M	5,000
2" x 8	T-20 Star	143	HGG2PLTBZ1	_	HGG2PLTBZ5	HGG2PLTBZ25	HGG2PLTBZ35M	3,500
2-1/2" x 9	T-25 Star	89	HGG212PLTBZ1	_	HGG212PLTBZ5	HGG212PLTBZ25	HGG212PLTBZ25M	2,500
3" x 9	T-25 Star	76	HGG3PLTBZ1	_	HGG3PLTBZ5	HGG3PLTBZ25	HGG3PLTBZ2M	2,000
3-1/2" x 10	T-25 Star	54	HGG312PLTBZ1	_	HGG312PLTBZ5	HGG312PLTBZ25	HGG312PLTBZ1M	1,000
4" x 10	T-25 Star	47	HGG4PLTBZ1	_	HGG4PLTBZ5	HGG4PLTBZ25	HGG4PLTBZ1M	1,000
5" x 10	T-25 Star	38	HGG5PLTBZ1	HGG5PLTBZ1	_	HGG5PLTBZ25	HGG5PLTBZ750	750
6" x 10	T-25 Star	32	HGG6PLTBZ1	HGG6PLTBZ1	_	HGG6PLTBZ25	HGG6PLTBZ600	600
GREEN								
1-1/4" x 8	T-20 Star	216	HGG114PLTGN1	_	HGG114PLTGN5	HGG114PLTGN25	HGG114PLTGN8M	8,000
1-5/8" x 8	T-20 Star	162	HGG158PLTGN1	_	HGG158PLTGN5	HGG158PLTGN25	HGG158PLTGN5M	5,000
2" x 8	T-20 Star	143	HGG2PLTGN1	_	HGG2PLTGN5	HGG2PLTGN25	_	_
2-1/2" x 9	T-25 Star	89	HGG212PLTGN1	_	HGG212PLTGN5	HGG212PLTGN25	HGG212PLTG25M	2,500
3" x 9	T-25 Star	76	HGG3PLTGN1	_	HGG3PLTGN5	HGG3PLTGN25	HGG3PLTGN2M	2,000
3-1/2" x 10	T-25 Star	54	HGG312PLTGN1	_	HGG312PLTGN5	HGG312PLTGN25	HGG312PLTGN1M	1,000
4" x 10	T-25 Star	47	HGG4PLTGN1	_	HGG4PLTGN5	HGG4PLTGN25	_	_
5" x 10	T-25 Star	38	_	HGG5PLTGN1	_	HGG5PLTGN25	HGG5PLTGN750	750
6" x 10	T-25 Star	32	_	HGG6PLTGN1	_	HGG6PLTGN25	HGG5PLTGN600	600

<sup>\*</sup> NOTE: Knurled shank not available on 1-1/4" screws

### **HUTTIG-GUARD**

### **Platinum Trim Screw**

For attaching deck boards, railings, and trim.

- 12-point star drive for better engagement, more torque
- Relatively small head, sinks beneath the surface for low visibility. Nibs help to "seat" the head into the hole. Coarse, serrated thread uses less torque to cut through wood
- Knurled shank for reduced drag, faster, easier penetration
- Type 17 long point designed for use with thicker pieces of hardwood
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details



















Available colors:

Bronze



Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
BRONZE						
1-5/8" x 9	T-20 Star	146	HGG158PLTHBZ1	HGG158PLTHBZ5	HGG158PLTHZ4M	4,000
2-1/4" x 9	T-20 Star	105	HGG214PLTHBZ1	_	_	_
2-1/2" x 9	T-20 Star	97	HGG212PLTHBZ1	HGG212PLTHBZ5	HGG212PLTHZ25M	2,500
3" x 9	T-20 Star	82	HGG3PLTHBZ1	HGG3PLTHBZ5	HGG3PLTHZ2M	2,000
GREEN						
1-5/8" x 9	T-20 Star	146	HGG158PLTHGN1	HGG158PLTHGN5	HGG158PLTHG4M	4,000
2-1/4" x 9	T-20 Star	105	HGG214PLTHGN	_	HGG214PLTHG25M	2,500
2-1/2" x 9	T-20 Star	97	HGG212PLTHGN1	HGG212PLTHGN5	HGG212PLTHG25M	2,500
3" x 9	T-20 Star	82	HGG3PLTHGN1	HGG3PLTHGN5	HGG3PLTHG2M	2,000

### **Premium Outdoor Screw**

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head sits flush. Nibs help to pull material from the hole, and to "seat" the head for smoother finished surface.
- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited 50 year fastener warranty. See www.huttig-grip.com/warranty for complete details











Available colors:


Brown	Green	Red	Tan
<del></del>	*********	- WWWWW	

ength x	Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
BROW	/N					<u>'</u>	<u> </u>	
1-1/4" x	8	T-20 Star	236	HGG114PREBN1	HGG114PREBN5	HGG114PREBN25	HGG114PREBN8M	8,000
1-5/8" x	8	T-20 Star	188	HGG158PREBN1	HGG158PREBN5	HGG158PREBN25	HGG158PREBN5M	5,000
2" x	8	T-20 Star	154	HGG2PREBN1	HGG2PREBN5	HGG2PREBN25	HGG2PREBN35M	3,500
2-1/2" x	9	T-25 Star	99	HGG212PREBN1	HGG212PREBN5	HGG212PREBN25	HGG212PREBN25M	2,500
3" x	9	T-25 Star	83	HGG3PREBN1	HGG3PREBN5	HGG3PREBN25	HGG3PREBN2M	2,000
3-1/2" x	: 10	T-25 Star	61	HGG312PREBN1	HGG312PREBN5	HGG312PREBN25	HGG312PREBN1M	1,000
4" x	: 10	T-25 Star	54	HGG4PREBN1	HGG4PREBN5	HGG4PREBN25	HGG4PREBN1M	1,000
GREE	N							
1-1/4" x	8	T-20 Star	236	HGG114PREGN1	HGG114PREGN5	HGG114PREGN25	HGG114PREGN8M	8,000
1-5/8" x	8	T-20 Star	188	HGG158PREGN1	HGG158PREGN5	HGG158PREGN25	HGG158PREGN5M	5,000
2" x	8	T-20 Star	154	HGG2PREGN1	HGG2PREGN5	HGG2PREGN25	HGG2PREGN35M	3,500
2-1/2" x	9	T-25 Star	99	HGG212PREGN1	HGG212PREGN5	HGG212PREGN25	HGG212PREG25M	2,500
3" x	9	T-25 Star	83	HGG3PREGN1	HGG3PREGN5	HGG3PREGN25	HGG3PREGN2M	2,000
3-1/2" x	: 10	T-25 Star	61	HGG312PREGN1	HGG312PREGN5	HGG312PREGN25	HGG312PREGN1M	1,000
4" x	: 10	T-25 Star	54	HGG4PREGN1	HGG4PREGN5	HGG4PREGN25	HGG4PREGN1M	1,000
RED								
1-1/4" x	8	T-20 Star	236	HGG114PRERD1	HGG114PRERD5	HGG114PRERD25	_	_
1-5/8" x	8	T-20 Star	188	HGG158PRERD1	HGG158PRERD5	HGG158PRERD25	_	_
2" x	8	T-20 Star	154	HGG2PRERD1	HGG2PRERD5	HGG2PRERD25	_	_
2-1/2" x	9	T-25 Star	99	HGG212PRERD1	HGG212PRERD5	HGG212PRERD25	HGG212PRER25M	2,500
3" x	9	T-25 Star	83	HGG3PRERD1	HGG3PRERD5	HGG3PRERD25	_	_
3-1/2" x	: 10	T-25 Star	61	HGG312PRERD1	HGG312PRERD5	HGG312PRERD25	HGG312PRERD1M	1,000
4" x	: 10	T-25 Star	54	HGG4PRERD1	HGG4PRERD5	HGG4PRERD25	_	_
TAN								
1-1/4" x	8	T-20 Star	236	HGG114PRETN1	HGG114PRETN5	HGG114PRETN25	HGG114PRETN8M	8,000
1-5/8" x	8	T-20 Star	188	HGG158PRETN1	HGG158PRETN5	HGG158PRETN25	HGG158PRETN5M	5,000
2" x	8	T-20 Star	154	HGG2PRETN1	HGG2PRETN5	HGG2PRETN25	HGG2PRETN35M	3,500
2-1/2" x	9	T-25 Star	99	HGG212PRETN1	HGG212PRETN5	HGG212PRETN25	HGG212PRET25M	2,500
3" x	9	T-25 Star	83	HGG3PRETN1	HGG3PRETN5	HGG3PRETN25	HGG3PRETN2M	2,000
3-1/2" x	: 10	T-25 Star	61	HGG312PRETN1	HGG312PRETN5	HGG312PRETN25	HGG312PRETN1M	1,000
4" x	: 10	T-25 Star	54	HGG4PRETN1	HGG4PRETN5	HGG4PRETN25	HGG4PRETN1M	1,000

Product availability varies by location.

www.huttig-grip.com

# **HUTTIG-GUARD**<sup>™</sup> Premium Composite Screw Color Cross-Reference

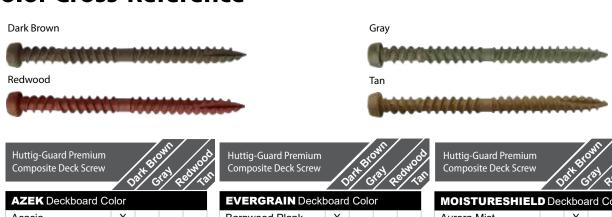

AZEK Deckboard Co	olor		
Acacia	Х		
Brazilian Walnut	Х		
Brownstone			Χ
Dark Hickory	Х		
Island Oak		Х	
Kona	Х		
Mahogany	Х		
Morado	Х		
Mountain Redwood	Х		
Slate Gray		Х	

<b>DECKORATORS</b> [	eckb)	oard	Color	
Ashwood		Х		
Barrel-Aged Oak	X			
Cedar	X			
Dusk		Х		
Gray		Х		
Hickory	X			
Ironwood	X			
Kingwood	X			
Mesquite	X			
Milled Maple				Χ
Prairie	X			
Redwood	X			
Ridgeway		Х		
Riverhouse	X			
Sandlewood				Χ
Walnut	X			
Woodland	X			

Woodland	Χ		
DURALIFE Deckbo	ard C	Color	
Charcoal Gray		Х	
Garapa Gray		Χ	
Golden Teak	Χ		
Mahogany	Χ		
Merlot	Χ		
Pebble			Χ
Saratoga Brown	Χ		
Slate Gray		Χ	
Spanish Cedar	Χ		
Tropical Walnut	Χ		

<b>EVERGRAIN</b> Deck	board	Colc	or	
Barnwood Plank	Х			
Cape Cod Gray		Χ		
Caribou Brown	Х			
Greywood		Χ		
Harbor Gray		Χ		
Redwood			Χ	
Rustic Walnut	Х			
Shaded Auburn	Χ			
Spiced Teak	X			
Tangled Twine	Χ			
Weathered Wood	Х			
Woodland Bark	X			

	FIBERON Deckboar	rd Co	lor		
ĺ	Barnwood Brown	Х			
	Brown	Χ			
	Brownstone	Χ			
	Burnt Umber	Χ			
	Cabin	Χ			
	Canyon Brown	Χ			
	Castle Gray		Χ		
	Chestnut	Χ			
	Cinnabar			Χ	
	Cottage		Χ		
	Espresso	Χ			
	Earthstone	Χ			
	Flagstone		Χ		
	Fossil				Х
	Front Porch Gray		Χ		
	Graphite		Χ		
	Latte	Χ			
	Rosewood			Χ	
	Sandstone		Χ		
	Tudor Brown	Χ			
	Warm Sienna	Χ			

MOISTURESHIEL	<b>D</b> Dec	ckboa	ard Co	olor
Aurora Mist		Х		
Brazilian Chestnut	X			
Bridle	Х			
Cape Cod Gray		Х		
Earthtone				Х
Golden Teak	Х			
Graystone		Х		
Northern Hickory	Χ			
Rosewood			Χ	
Southern Barnwood		Х		
Tigerwood	Х			

TIMBERTECH Deckboard Color

Antigua Gold	X			
Ashwood		Х		
Cedar			Χ	
Mocha	X			
Rustic Elm	X			
Silver Maple		Х		
TREX Deckboard (	Color			
Slate		Х		
Clam Shell		Х		
Fire Pit			Х	
Havana Gold	X			
Island Mist		Х		
Lava Rock	X			
Madeira			X	
Pebble Gray		Х		
Saddle Rose	Х			
Tree House	X			
Vintage Lantern	X			
Winchester Gray		Х		

This chart is to be used as only a reference guide when choosing fastener colors and does not guarantee an exact color match

Huttig-Grip™ is a trademark of Woodgrain. Other product and company names listed may be trademarks of their respective owners. Woodgrain is not affiliated with the other products and companies listed.

### **HUTTIG-GUARD**

### **Premium Composite Deck Screw**

For attaching composite decking to deck frame.

- 12-point star drive for better engagement, more torque
- · Mushroom head not much larger than shank, designed to sink to the hole, trapping material beneath, eliminating head pop-ups on deck surface
- Triple-thread design traps material within the hole, away from surface
- Type 17 point designed for use with dense, harder materials, elminates splitting at end of boards
- Limited 50 year fastener warranty. See www.huttig-grip.com/warranty for complete details














#### Available colors:



		0.0000000000000000000000000000000000000	THE RESERVE THE PARTY OF THE PA	Miles a state to the second			
Length x Gauge	Drive	Approx. count / lb.	350 Piece Box 5 / master	1,750 Piece Bucket			
DARK BROW	/N						
2-1/2" x 9	T-20 Star	_	HGG212CDB350	HGG212CDB175M			
2-3/4" x 9	T-20 Star	77	HGG234CDB350	HGG234CDB175M			
GRAY							
2-1/2" x 9	T-20 Star	_	HGG212CGY350	HGG212CGY175M			
2-3/4" x 9	T-20 Star	77	HGG234CGY350	HGG234CGY175M			
REDWOOD							
2-3/4" x 9	T-20 Star	77	HGG234CRD350	HGG234CRD175M			
TAN							
2-3/4" x 9	T-20 Star	77	HGG234CTN350	HGG234CTN175M			

### **INSTALLATION TIP**

- 350 piece installs 100 ft.2
- 1,750 piece installs 500 ft.2

PREMIUM COMPOSITE DECK SCHEW 2-3/4" X 9 Insk Mass	PREMIUNI COMPOSITI OFCX SCREW 2-2/47 x 9 cm	PREMIUM COMPOSITE DECK SCREW 2-34" x 9 km seed	PULMUM COMPOSITI
	龜		
HUTTIG-GUARD	HUTTIG-GUARD	HUTTIG-GUARD	HUTTIG-GUARD

# **HUTTIG-GUARD**<sup>™</sup> Stainless Steel

**Limited Lifetime Fastener Warranty** 

Recommended for use outdoors, with treated lumber, and in other high-corrosive environments.



### **305 STAINLESS STEEL**

recommended for use with:







#### 316 STAINLESS STEEL

recommended for use with:











#### **OUTDOOR SCREWS**

### **APPLICATIONS**

- Decks
- **Docks**
- **Fences**
- Gazebos
- General

Construction













#### TRIM SCREWS

#### **APPLICATIONS**

- Railings, Narrow Deck Boards, Stair Treads
- Trim Wood, PVC, or Composite















# **Wood & Exterior Screws**

### **HUTTIG-GUARD™ STAINLESS STEEL SCREWS**

Stainless Steel	- Decking	. 63
Stainless Steel	- Trim	. 64



ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

### **HUTTIG-GUARD**

### **Stainless Steel Screw**

For deck, patio, and outdoor construction.

- 12-point star drive for better engagement, more torque
- Flat head sits flush. Nibs help to pull material from the hole, and to "seat" the head for smoother finished surface.
- Coarse thread cuts through wood
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details















Length x Gauge	Drive	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
305 STAINLESS STEEL							
1-1/4" x 8	T-20 Star	202	HGG114SS1	HGG114SS5	HGG114SS25	HGG114SS8M	8,000
1-5/8" x 8	T-20 Star	161	HGG158SS1	HGG158SS5	HGG158SS25	HGG158SS5M	5,000
2" x 8	T-20 Star	135	HGG2SS1	HGG2SS5	HGG2SS25	HGG2SS35M	3,500
2-1/2" x 9	T-25 Star	99	HGG212SS1	HGG212SS5	HGG212SS25	HGG212SS25M	2,500
3" x 9	T-25 Star	82	HGG3SS1	HGG3SS5	HGG3SS25	HGG3SS2M	2,000
3-1/2" x 10	T-25 Star	60	HGG312SS1	HGG312SS5	HGG312SS25	HGG312SS1M	1,000
4" x 10	T-25 Star	53	HGG4SS1	HGG4SS5	HGG4SS25	HGG4SS1M	1,000
316 STAINL	ESS STEEL						
1-1/4" x 8	T-20 Star	202	HGG114161	HGG114165	HGG114SS1625	HGG114SS168M	8,000
1-5/8" x 8	T-20 Star	161	HGG158161	HGG158165	HGG158SS1625	HGG158SS165M	5,000
2" x 8	T-20 Star	135	HGG2161	HGG2165	HGG2SS1625	HGG2SS1635M	3,500
2-1/2" x 9	T-25 Star	99	HGG212161	HGG212165	HGG212SS1625	HGG212SS1625M	2,500
3" x 9	T-25 Star	82	HGG3161	HGG3165	HGG3SS1625	HGG3SS162M	2,000
3-1/2" x 10	T-25 Star	60	HGG312161	HGG312165	HGG312SS1625	HGG312SS161M	1,000
4" x 10	T-25 Star	53	HGG4161	HGG4165	HGG4SS1625	HGG4SS161M	1,000



# **HUTTIG-GUARD**

## **Stainless Steel Trim Screw**

For attaching deck boards, railings, and trim.

- 12-point star drive for better engagement, more torque
- Relatively small head, sinks beneath the surface for low visibility. Nibs help to "seat" the head into the hole.
- Coarse thread cuts through wood
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details












Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket				
305 STAINL	ESS STEEL								
1-5/8" x 7	T-15 Star	170	HGG7158SSTRM1	HGG7158SSTRM5	HGG7158SSTRM25				
2-1/4" x 7	T-15 Star	125	HGG7214SSTRM1	HGG7214SSTRM5	HGG7214SSTRM25				
2-1/2" x 7	T-15 Star	115	HGG7212SSTRM1	HGG7212SSTRM5	HGG7212SSTRM25				
3" x 7	T-15 Star	96	HGG73SSTRM1	HGG73SSTRM5	HGG73SSTRM25				
305 STAINLESS STEEL - PAINTED WHITE									
1-5/8" 7	T-15 Star	170	HGG7158SSTRMWH1	_	_				
2-1/4" x 7	T-15 Star	125	HGG7214SSTRMWH1	_	_				
316 STAINL	ESS STEEL								
1-5/8" x 7	T-15 Star	170	HGG715816TRM1	HGG715816TRM5	HGG715816TRM25				
2-1/4" x 7	T-15 Star	125	HGG721416TRM1	HGG721416TRM5	HGG721416TRM25				
2-1/2" x 7	T-15 Star	115	HGG721216TRM1	HGG721216TRM5	HGG721216TRM25				
3" x 7	T-15 Star	96	HGG7316TRM1	HGG7316TRM5	_				
316 STAINL	ESS STEEL	- PAINTE	D WHITE						
2-1/4" x 7	T-15 Star	125	HGG721416TRMWH1	HGG721416TRMWH5	HGG721416TRMWH25				
Length x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket				

Length	x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
305	STAINL	ESS STEEL				
1-5/8"	x 9	T-20 Star	144	HGG158SSTRM1	HGG158SSTRM5	HGG158SSTRM25
2-1/4"	x 9	T-20 Star	104	HGG214SSTRM1	HGG214SSTRM5	_
2-1/2"	x 9	T-20 Star	95	HGG212SSTRM1	HGG212SSTRM5	HGG212SSTRM25
3"	x 9	T-20 Star	81	HGG3SSTRM1	HGG3SSTRM5	HGG3SSTRM25
305	STAINL	ESS STEEL	- PAINTE	D WHITE		
2-1/4"	x 9	T-20 Star	104	HGG214SSTRMWH1	_	_
316	STAINL	ESS STEEL				
1-5/8"	x 9	T-20 Star	144	HGG15816TRM1	HGG15816TRM5	HGG15816TRM25
2-1/4"	x 9	T-20 Star	104	HGG21416TRM1	HGG21416TRM5	_
2-1/2"	x 9	T-20 Star	95	HGG21216TRM1	HGG21216TRM5	HGG21216TRM25
3"	x 9	T-20 Star	81	HGG316TRM1	HGG316TRM5	HGG316TRM25



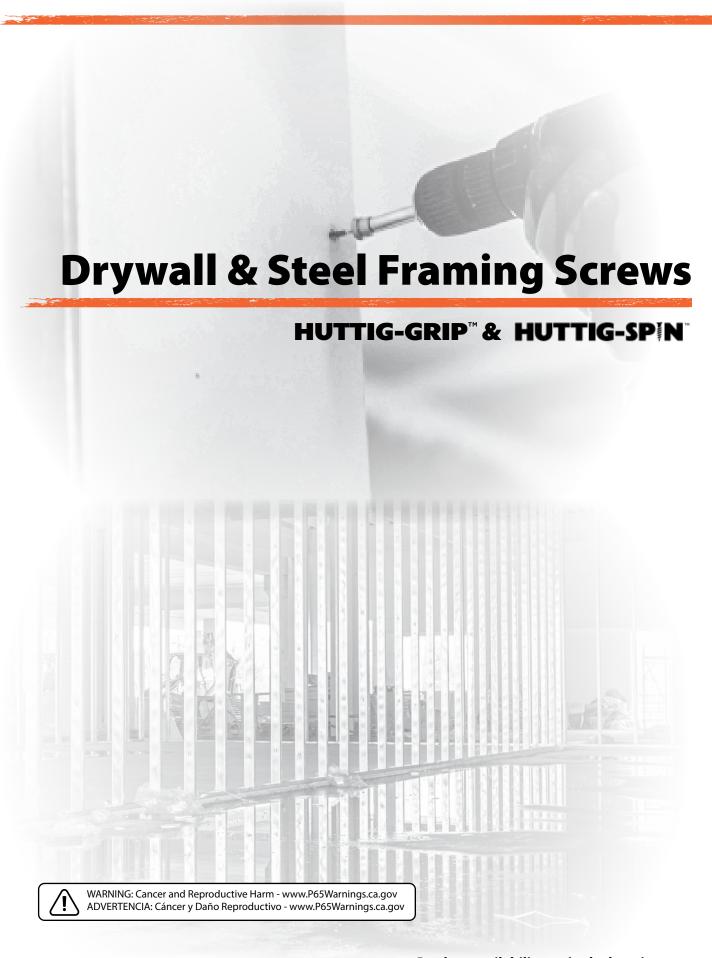

# **HUTTIG-GRIP**<sup>™</sup> Drywall Screws

DRYWALL

## L-TO-WOOD SCREWS

Fine thread, sharp point commonly used when attaching "soft" materials to wood or to light-gauge steel, such as wood trim to light-gauge steel stud. Limited or no resistance to corrosion.

Coarse thread, sharp point commonly used when attaching gypsum board to wood or gypum board to gypsum board. Limited or no resistance to corrosion.


#### **STYLES**

- Drywall Screw Fine Thread
- Drywall Screw Coarse Thread

#### **FINISH**





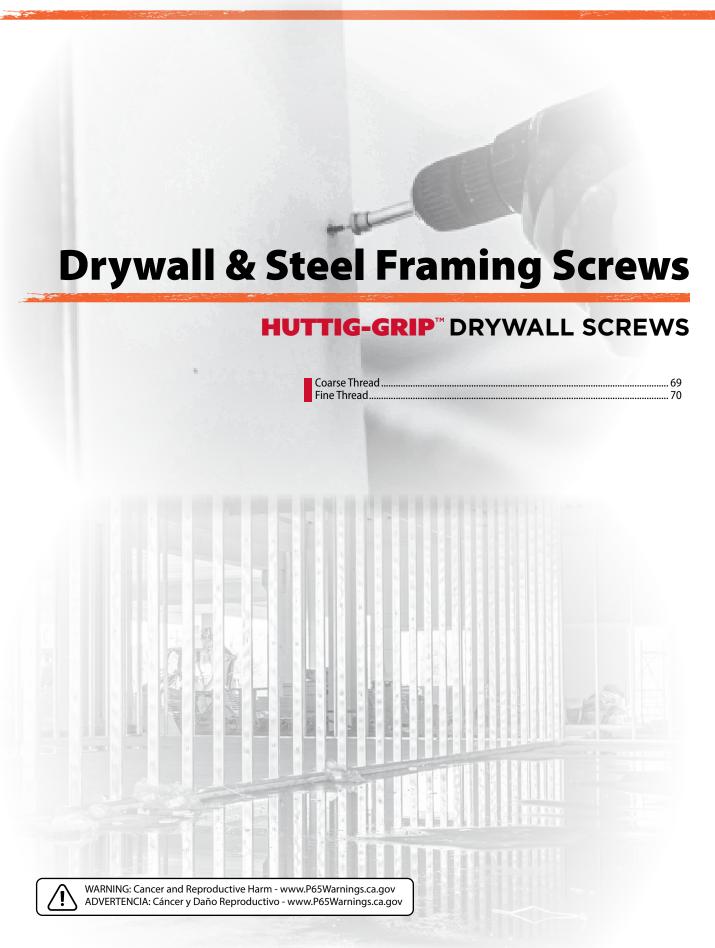

Product availability varies by location.

www.huttig-grip.com

## **HUTTIG-GRIP**

# **Drywall Screw - Coarse Thread**

For attaching sheets of drywall to wood studs.

• Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish

• Sharp point, coarse thread for use with wood.













-						
Length >	Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket
PHOS	PHAT	E COATED				
1" >	6	#2 Phillips	341	HGS1CDW1	HGS1CDW5	HGS1CDW25
1-1/8" >	6	#2 Phillips	295	HGS118CDW1	HGS118CDW5	_
1-1/4" >	6	#2 Phillips	278	HGS114CDW1	HGS114CDW5	HGS114CDW25
1-5/8" >	6	#2 Phillips	217	HGS158CDW1	HGS158CDW5	HGS158CDW25
2" >	6	#2 Phillips	186	HGS2CDW1	HGS2CDW5	HGS2CDW25
2-1/2" >	8	#2 Phillips	110	HGS212CDW1	HGS212CDW5	HGS212CDW25
3" >	8	#2 Phillips	90	HGS3CDW1	HGS3CDW5	HGS3CDW25
3-1/2" >	10	#2 Phillips	55	HGS312CDW1	HGS312CDW5	_
4" >	10	#2 Phillips	50	HGS4CDW1	HGS4CDW5	_
5" >	10	#2 Phillips	39	HGS5CDW1	_	_
6" >	10	#2 Phillips	33	HGS6CDW1	_	_



# **Drywall Screw - Fine Thread**

For attaching sheets of drywall to light-gauge steel studs.

· Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish

· Sharp point, fine thread for use with light gauge steel













Length	x Gauge	Drive	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket					
РНО	PHOSPHATE COATED										
1"	x 6	#2 Phillips	336	HGS1FDW1	HGS1FDW5	_					
1-1/8"	x 6	#2 Phillips	295	HGS118FDW1	HGS118FDW5	_					
1-1/4"	x 6	#2 Phillips	278	HGS114FDW1	HGS114FDW5	HGS114FDW25					
1-5/8"	x 6	#2 Phillips	217	HGS158FDW1	HGS158FDW5	HGS158FDW25					
2"	x 6	#2 Phillips	186	HGS2FDW1	HGS2FDW5	HGS2FDW25					
2-1/2"	x 8	#2 Phillips	110	HGS212FDW1	HGS212FDW5	HGS212FDW25					
3"	x 8	#2 Phillips	90	HGS3FDW1	HGS3FDW5	HGS3FDW25					

# **HUTTIG-SPIN**<sup>™</sup> Commercial Fasteners

Designed for use with drywall & steel framing

Color coded packaging help guide you to the five main categories by application.

**DRYWALL** 

LIGHT GAUGE STEEL

**HEAVY GAUGE STEEL** 

CEMENT & FIBER CEMENT

WOOD

### **DRYWALL-TO-WOOD** SCREWS

**Coarse thread, sharp point** commonly used when attaching gypsum board to wood or gypsum board to gypsum board. Limited or no resistance to corrosion.

#### **STYLES**

- Drywall Screw Coarse Thread
- Laminating Screw

#### **FINISH**



# **LIGHT GAUGE STEEL SCREWS**

**Fine thread, sharp point** commonly used when attaching "soft" materials to wood or to light-gauge steel, such as wood trim to light-gauge steel stud. Limited or no resistance to corrosion.

#### STYLES

- Drywall Screw Fine Thread
- Modified Truss Screw
- Pan Framer Screw
- Phillips Wafer Head Screw
- Slotted Hex Washer Head Screw
- Trim Screw

#### **FINISHES**





### **HEAVY GAUGE STEEL SCREWS**

**Fine thread, self-drill** used when working with harder materials, including metal, and/or attaching to heavier-gauge steel. Limited or no resistance to corrosion.

#### **STYLES**

- Drywall Screw Self-drill
- Eye Lag Screw
- Hex Washer Head Screw
- Modified Truss Screw
- Pan Framer Screw
- Pan Head Screw
- Phillips Wafer Head Screw
- Trim Screw

#### **FINISHES**





# **CEMENT & FIBER CEMENT SCREWS**

**Spade point** used when attaching cement board to wood or to light-gauge steel studs. **Self-drill** used for attaching cement or fiber cement boards to heavier-gauge steel studs.

Lifetime limited fastener warranty. Visit huttig.com/warranty for complete limited fastener warranty details.

#### **STYLES**

- Cement Board Screw -Wafer Head with Nibs Self-drill
- Cement Board Screw -Wafer Head with Nibs Spade Point

Fiber Cement Board Screw - Flat Head Self-drill with Wings



# **WOOD** FASTENERS

**Sharp point** for attaching to wood or other "soft" materials. Limited or no resistance to corrosion.

#### **STYLE**

Eye Lag Screw

**FINISH** 



# **Drywall & Steel Framing Screws**

## **HUTTIG-SPIN** COMMERCIAL FASTENERS

Drywall Screws	
Coarse Thread	74
Laminating Screw	74
Light Gauge	
Heavy Gauge	
Light Gauge Screws	
Modified Truss	77
Pan Framer	
Phillips Wafer Head	78
Slotted Hex Washer Head	78
Trim Head	
Heavy Gauge Fasteners  Hex Washer Head	80
Modified Truss	
Pan Framer	
Pancake Framer	
Pan Head	
Phillips Wafer Head	
Trim Head	
Eye Lag	
Wood Fasteners	
Eye Lag	
Particle Board Screws	85
Cement Board Screws	
Cement Board - Self-Drill	
Cement Board - Spade Point	

# HUTTIG-SP N **FASTENERS**

# **Drywall & Steel Framing Screws Designed for the Construction Professional**

#### Sourcing:

- Produced only in approved mills in Taiwan
- All packaging has mill and production codes for traceability

#### **Testing:**

- Conducted on all products
- Detailed process, includes sampling during production, plus pre-shipment full inspection report on every batch

#### **Product specifications:**

- Developed to meet or exceed industry expectations, based upon extensive testing of competitive brands including Grabber, Pro-Twist, Hilti, and ITW Buildex.
- ASTM: All screws are made from C1022 wire

**Product identifier:** "HS" head stamp for easy identification and streamlined inspections

#### Complete product mix, bulk & packaged programs

- Drywall Screws coarse & fine thread
- Drywall Screws bugle head self-drill
- **Laminator Screws**
- **Modified Truss Screws**
- Pan Framer Screws

- Pan Head Screws
- Hex & Slotted Hex Washer Head Screws
- **Cement & Fiber Cement Board Screws**
- **Trim Screws**
- Phillips Wafer Head Screws

#### Packaging is color-coded by application = easy product identification

# DRYWALL

For attaching drywall to wood

#### AVAILABLE FINISH



#### LIGHT GAUGE

For attaching drywall and other materials to light-gauge steel

#### **AVAILABLE FINISHES**



#### **HEAVY GAUGE**

For attaching drywall and other materials to heavy-gauge steel

#### **AVAILABLE FINISHES**



#### **CEMENT BOARD**

For attaching cement and fiber cement board

#### AVAILABLE FINISH





# **Drywall Screw - Coarse Thread**

For attaching gypsum board and wood to wood studs.

· Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish

• Sharp point, coarse thread for use with wood















Length	x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
PHO	SPHATE	COATED							
1"	x 6	#2 Phillips	Sharp	341	HSP1CT1	HSP1CT5	_	HSP1CT10M	10,000
1-1/8"	x 6	#2 Phillips	Sharp	295	HSP118CT1	HSP118CT1	_	HSP118CT10M	10,000
1-1/4"	x 6	#2 Phillips	Sharp	278	HSP114CT1	HSP114CT5	HSP114CT25	HSP114CT8M	8,000
1-5/8"	x 6	#2 Phillips	Sharp	242	HSP158CT1	HSP158CT5	HSP158CT25	HSP158CT5M	5,000
2"	x 6	#2 Phillips	Sharp	186	HSP62CT1	HSP62CT5	HSP62CT25	HSP62CT35M	3,500
2-1/2"	x 8	#2 Phillips	Sharp	110	HSP212CT1	HSP212CT5	HSP212CT25	HSP212CT25M	2,500
3"	x 8	#2 Phillips	Sharp	90	HSP3CT1	HSP3CT5	HSP3CT25	HSP3CT2M	2,000
3-1/2"	x 10	#2 Phillips	Sharp		HSP312CT1	HSP312CT5	_	HSP312CT1M	1,000
4"	x 10	#2 Phillips	Sharp		HSP4CT1	HSP4CT5	_	HSP4CT1M	1,000

# **Laminating Screw**

For attaching layers of gypsum boards together.

- Extra-heavy gauge for greater holding power
- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point for drilling through gypsum board and paper backing or into wood













Length x	Gauge	Drive	Point	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity		
PHOSPHATE COATED										
1-1/2" x	10	#2 Phillips	Sharp	130	HSP112LAM1	HSP112LAM5	HSP112LAM5M	5,000		





# **Drywall Screw - Fine Thread**

For attaching gypsum board to light-gauge steel studs.

- · Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, fine thread for use with light-gauge steel

















Length	x Gauge	Drive	Point	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	25 lb. Bucket	Bulk Box	Box Quantity
PHOS	PHATE	COATED							
1"	x 6	#2 Phillips	Sharp	343	HSP1FT1	HSP1FT5	_	HSP1FT10M	10,000
1-1/8"	x 6	#2 Phillips	Sharp	294	HSP118FT1	HSP118FT5	_	HSP118FT10M	10,000
1-1/4"	x 6	#2 Phillips	Sharp	278	HSP114FT1	HSP114FT5	HSP114FT25	HSP114FT8M	8,000
1-5/8"	x 6	#2 Phillips	Sharp	216	HSP158FT1	HSP158FT5	HSP158FT25	HSP158FT5M	5,000
2"	x 6	#2 Phillips	Sharp	186	HSP62FT1	HSP62FT5	HSP62FT25	HSP62FT135M	3,500
2-1/4"	x 7	#2 Phillips	Sharp	146	HSP214FT1	HSP214FT5	_	HSP214FT3M	3,000
2:-1/2"	x 8	#2 Phillips	Sharp	110	HSP212FT1	HSP212FT5	HSP212FT25	HSP212FT25M	2,500
3"	x 8	#2 Phillips	Sharp	108	HSP3FT1	HSP3FT5	HSP3FT25	HSP3FT2M	2,000

## **HUTTIG-SP**<sup>§</sup>N<sup>™</sup>

# **Drywall Screw - Self-Drill**

For attaching gypsum board to heavy-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Self-drill point, fine thread for use with steel

Available Finishes















**Phosphate Coated** 



١.	TIET TO A CONTRACTOR OF THE PARTY OF THE PAR
	A 3-1111111111111
	W.
	7inc Plated

Length	x Ga	auge	Drive	Point	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
PHOS	SPH	ATE	COATED						
1-1/8"	x 6		#2 Phillips	Self-drill	272	HSPQ118DW1	_	_	_
1-1/4"	x 6		#2 Phillips	Self-drill	255	HSPQ114DW1	HSPQ114DW5	HSPQ114DW8M	8,000
1-5/8"	x 6		#2 Phillips	Self-drill	211	HSPQ158DW1	HSPQ158DW5	HSPQ158DW5M	5,000
1-7/8"	x 6		#2 Phillips	Self-drill	178	HSPQ178DW1	HSPQ178DW5	HSPQ178DW4M	4,000
2-3/8"	x 8		#2 Phillips	Self-drill	105	HSPQ238DW1	HSPQ238DW5	HSPQ238DW3M	3,000
2-5/8"	x 8		#2 Phillips	Self-drill	96	HSPQ258DW1	HSPQ258DW5	HSPQ258DW2M	2,000
3"	x 8		#2 Phillips	Self-drill	84	HSPQ3DW1	HSPQ3DW5	HSPQ3DW2M	2,000
ZINC	PL/	ATEC							
1"	x 6		#2 Phillips	Self-drill	313	HSPQ1DWZ1	HSPQ1DWZ5	HSPQ1DWZ10M	10,000
1-1/8"	x 6		#2 Phillips	Self-drill	263	HSPQ118DWZ1	HSPQ118DWZ5	HSPQ118DWZ10M	10,000
1-1/4"	x 6		#2 Phillips	Self-drill	255	HSPQ114DWZ1	HSPQ114DWZ5	HSPQ114DWZ8M	8,000
1-5/8"	x 6		#2 Phillips	Self-drill	211	HSPQ158DWZ1	HSPQ158DWZ5	HSPQ158DWZ5M	5,000
1-7/8"	x 6		#2 Phillips	Self-drill	178	HSPQ178DWZ1	HSPQ178DWZ5	HSPQ178DWZ4M	4,000
2-3/8"	x 8		#2 Phillips	Self-drill	105	HSPQ238DWZ1	HSPQ238DWZ5	HSPQ238DWZ3M	3,000
2-5/8"	x 8		#2 Phillips	Self-drill	96	HSPQ258DWZ1	HSPQ258DWZ5	HSPQ258DWZ2M	2,000
3"	x 8		#2 Phillips	Self-drill	84	HSPQ3DWZ1	HSPQ3DWZ5	HSPQ3DWZ2M	2,000
3-1/2"	x 10	)	#2 Phillips	Self-drill	55	_	HSPQ312DWZ5	HSPQ312DWZM	1,000
4"	x 10	)	#2 Phillips	Self-drill	48	_	HSPQ4DWZ5	HSPQ4DWZM	1,000

## **HUTTIG-SP**N

#### **Modified Truss**

For attaching metal lath to wood or light-gauge steel studs or where low profile is desired.

- Wide head holds material in place, low profile for use with low clearance and/or minimized appearance
- Sharp point, fine thread for use with light gauge steel



















Length	x Gauge	Drive	Point	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
ZINC	PLATE	D						
1/2"	x 8	#2 Phillips	Sharp	278	HSP12MDTR1	HSP12MDTR5	HSP12MDTR10M	10,000
3/4"	x 8	#2 Phillips	Sharp	220	HSP34MDTR1	HSP34MDTR5	HSP34MDTR8M	8,000
1"	x 8	#2 Phillips	Sharp	183	HSP1MDTR1	HSP1MDTR5	HSP1MDTR5M	5,000
1-1/4"	x 8	#2 Phillips	Sharp	157	HSP114MDTR1	HSP114MDTR5	HSP114MDTR5M	5,000
1-5/8"	x 8	#2 Phillips	Sharp	129	HSP158MDTR1	HSP158MDTR5	HSP158MDTR5M	5,000
1-7/8"	x 8	#2 Phillips	Sharp	115	HSP178MDTR1	HSP178MDTR5	HSP178MDTR4M	4,000
2"	x 8	#2 Phillips	Sharp	109	HSP2MDTR1	HSP2MDTR5	HSP2MDTR25M	2,500
2-1/2"	x 8	#2 Phillips	Sharp	91	HSP212MDTR1	HSP212MDTR5	HSP212MDTR2M	2,000
3"	x 8	#2 Phillips	Sharp	78	HSP3MDTR1	_	HSP3MDTR15M	1,500

#### **Pan Framer**

For attaching light-gauge steel track to light-gauge steel studs where high torque is required.

- Pan framer head allows relatively high torque with wide base to keep material in place
- Sharp point, fine thread for use with light gauge steel


















## **Phillips Wafer Head Screw**

For attaching plywood to light-gauge steel.

• Trim head for concealment

PHILLIPS DRIVE

- · Sharp point, fine thread for use with light gauge steel
- Limited 50 year fastener warranty. See www.huttig-grip.com/warranty for complete details.





PHILLIPS WAFER HEAD


Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master				
PREMIUM 50 YEAR FINISH									
1-1/4" x 10	#2 Reduced Phillips	Sharp	114	HSP114WFH1	HSP114WFH5				

#### **Slotted Hex Washer Head Screw**

For attaching sheet metal to steel stud; penetrates sheet metal.

- Slotted drive minimizes stripping if screw is to be installed and removed.

  Hex head for high toque and allows for tightening when not enough space for screwdriver.
- Sharp point to avoid need for pre-drilling hole. Twin lead thread for fastening thin material.





Length	x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master						
ZINC	ZINC PLATTED											
1/2"	x 7	1/4" Slotted Hex	Sharp	144	HSP7124HX1	_						

Available Finish








#### **Trim Head Screw**

For attaching wood trim over single and double layer gypsum board to light-gauge steel or wood.

Trim head for concealment

· Sharp point, fine thread for use with light gauge steel





		Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master
PHO	SI	PHATE	COATE	)			
1"	Х	6	#1 Square	Sharp	344	HSP1TRM1	_
1-5/8"	Х	6	#1 Square	Sharp	214	HSP158TRM1	_
2-1/4"	Х	6	#1 Square	Sharp	156	HSP214TRM1	_
3"	Х	8	#2 Square	Sharp	94	HSP3TRM1	HSP3TRM5





#### **Hex Washer Head Screw - Self-Drill**

10 Gauge for attaching medium-gauge sheet metal such as HVAC to steel framing. 12 Gauge for attaching purlins and channels to structural studs.


- Hex head for high torque, flange at base prevents pull-through
- · Self-drill point, fine thread for use with steel









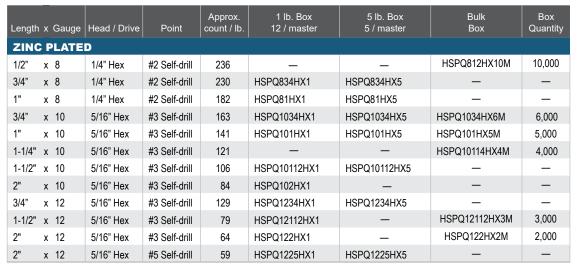





## **Modified Truss - Self-Drill**

For attaching metal lath to heavy-gauge steel studs or where low profile is desired.

· Wide head holds material in place, low profile for use with low clearance and/or minimized appearance

• Self-drill point, fine thread for use with steel















Length	x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
ZINC	PLATE	D						
1/2"	x 8	#2 Phillips	#2 Self-drill	273	HSPQ12MDTR1	HSPQ12MDTR5	HSPQ12MDTR10M	10,000
3/4"	x 8	#2 Phillips	#2 Self-drill	216	HSPQ34MDTR1	HSPQ34MDTR5	HSPQ34MDTR10M	10,000
1"	x 8	#2 Phillips	#2 Self-drill	183	HSPQ1MDTR1	HSPQ1MDTR5	HSPQ1MDTR8M	8,000
1-1/4"	x 8	#2 Phillips	#2 Self-drill	156	HSPQ114MDTR1	HSPQ114MDTR5	HSPQ114MDTR6M	6,000
1-5/8"	x 8	#2 Phillips	#2 Self-drill	128	HSPQ158MDTR1	HSPQ158MDTR5	HSPQ158MDTR5M	5,000
1-7/8"	x 8	#2 Phillips	#2 Self-drill	118	_	HSPQ178MDTR5	HSPQ178MDTR3M	3,000
2"	x 8	#2 Phillips	#2 Self-drill	110	HSPQ2MDTR1	HSPQ2MDTR5	HSPQ2MDTR25M	2,500
2-1/2"	x 8	#2 Phillips	#2 Self-drill	91	HSPQ212MDTR1	HSPQ212MDTR5	HSPQ212MDTR2M	2,000
3"	x 8	#2 Phillips	#2 Self-drill	78	HSPQ3MDTR1	HSPQ3MDTR5	_	_
3/4"	x 10	#2 Phillips	#3 Self-drill	189	HSPQ1034MTR1	HSPQ1034MTR5	HSPQ1034MTR5M	5,000



#### **Pan Framer Screw - Self-Drill**

For attaching heavy-gauge steel track to heavy-gauge steel studs where high torque is required.

Pan framer head allows relatively high torque with wide base to keep material in place

Self-drill point, fine thread for use with steel
















Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity					
ZINC PLATED												
7/16" x 7	#2 Reduced Phillips	Self-drill	363	HSPQ716PNZ1	HSPQ716PNZ5	HSPQ716PNZ10M	10,000					

#### Pancake Framer - Self-Drill

For attaching medium - to heavy-gauge stud track to medium- to heavy-gauge steel studs.

- · Hex head for high torque, flange at base prevents pull-through
- Self-drill point, fine thread for use with steel







Length x	Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	
ZINC	PLATE	D				
5/8" x	10	#2 Reduced Phillips	Self-drill	195	HSPQ58PKZ1	





#### **Pan Head Screw - Self-Drill**

For attaching strapping or furring channel to steel joist.

- Pan head for high-torque installations, lower profile than oval or round heads
- Self-drill point, fine thread for use with steel











Length x	Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	Bulk Box	Box Quantity
ZINC	PLATE	D					
1/2" x	8	#2 Reduced Phillips	Self-drill	255	HSPQ812JST1	<del>_</del>	_
3/4" x	8	#2 Reduced Phillips	Self-drill	251	HSPQ834JST1	HSPQ834JST10M	10,000

## **Phillips Wafer Head Screw - Self-Drill**

For attaching plywood to medium-gauge steel.

- Wide head holds material in place
- Self-drill point, fine thread for use with steel
- Limited 50 year fastener warranty. See www.huttig-grip.com/warranty for complete details.









Length x Gauge	Drive	Point	Approx.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity					
PREMIUM 50 YEAR FINISH												
3/4" X 10	#2 Reduced Phillips	Self-drill	178	HSPQ34WFH1	HSPQ34WFH5	_	_					
1-1/4" x 10	#2 Reduced Phillips	Self-drill	114	_	HSPQ114WFH5	HSPQ114WFH4M	4,000					

Available Finish





#### **Trim Head Screw - Self-Drill**

For attaching wood trim over single and double layer gypsum board to heavy-gauge steel.

- · Trim head for concealment
- Self-drill point, fine thread for use with steel















Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master					
PHOSPHATE COATED										
1-5/8" x 6	#1 Square	Self-drill	211	HSPQ158TRM1	HSPQ158TRM5					
2-1/4" x 6	#1 Square	Self-drill	150	HSPQ214TRM1	HSPQ214TRM5					



# **Eye Lag Screw - Self-Drill**

For attaching wire to steel studs for suspended ceiling grid.

• Self-drill point, fine thread for use with steel.



Length	Hole Size	Point	Approx. count / lb.	300 pc. Box 12 / master	Bulk Box	Box Quantity
ZINC P	LATED					
2"	1/4"	Self-drill	_	HSP2LAGEYE100	HSP2LAGEYE1M	1,000
3-1/4"	1/4"	Self-drill	_	HSP314LAGEYE100	HSP314LAGEYE1M	1,000





## **Eye Lag Screw**

For attaching wire to wood joists for suspended ceiling grid.

· Coarse thread for use with wood



Length	Hole Approx. Length Size count / lb.		300 pc. Box 12 / master	Bulk Box	Box Quantity
BRIGHT	г				
3"	1/4"	47	HSP3LAGEYE100	HSP3LAGEYE1M	1,000

Available Finish



#### **Particle Board Screw**

For use with particle board and other low-density or softer woods.

• Wide head holds material in place, low profile for use with low clearance and/or minimized appearance











Length	Gauge	Head	Drive	Point	Approx. count / lb.	Bulk Box	Box Quantity					
ZINC P	ZINC PLATED											
1-1/2"	8.000	Washer	Combination	Type 17	_	HSP112PTBWC5M	5,000					





## **Cement Board Screw - Self-Drill**

For attaching cement board to heavy-gauge steel studs.

- Flat head sits flush, nibs help to "seat" head in surface
- Self-drill point, fine thread for use with steel
- · Limited 50 year fastener warranty. See www.huttig-grip.com/warranty for complete details.













Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity				
PREMIUM 50 YEAR FINISH											
1-1/4" X 8	T-20 Star	Self-drill	167	HSPQ114CBNB1	HSPQ114CBNB5	HSPQ114CBNB5M	5,000				
1-5/8" x 8	T-20 Star	Self-drill	135	HSPQ158CBNB1	HSPQ158CBNB5	_	_				
2-1/4" x 8	T-20 Star	Self-drill	100	_	_	HSPQ214CBNB3M	3,000				

## **Cement Board Screw - Spade Point**

For attaching cement board to wood or to light-gauge steel studs.

- Flat head sits flush, nibs help to "seat" head in surface
- Spade point bores through cement board without cracking
- High-low thread for easier drilling with greater pull-out resistance
- Limited 50 year fastener warranty. See www.huttig-grip.com/warranty for complete details.

Available Finish













Length x Gauge	Drive	Point	Approx. count / lb.	1 lb. Box 12 / master	5 lb. Box 5 / master	Bulk Box	Box Quantity
1-1/4" x 8	T-20 Star	Spade	181	HSP114CBSP1	HSP114CBSP5	HSP114CBSP5M	5,000
1-5/8" x 8	T-20 Star	Spade	147	HSP158CBSP1	HSP158CBSP5	HSP158CBSP5M	5,000
2-1/4 x 8	T-20 Star	Spade	104	HSP214CBSP1	HSP214CBSP5	HSP214CBSP3M	3,000

#### **HUTTIG-SPIN**

# **HUTTIG-SP** N Collated Screws

Collated screw systems increase efficiency on the jobsite and reduce strain on installers by providing a faster, easier way to attach drywall (including ceilings), subfloors, and deck boards.

Designed to fit auto-feed screwdrivers from Grabber, Hitachi, Milwaukee, Muro, Ridgid, Ryobi, Senco, and others.

#### **Manufactured with Quality & Compliance**

- · Produced in approved mills in Taiwan
- Detailed testing protocol in place
  - Sampling during production
  - Pre-shipment full inspection report on every batch Product Identifier: "HS" head stamp for verification
- · Every pail stamped with mill and production code for traceability
- All screws are made from C1022 wire



#### Color-coded packaging identifies finishes and applications

#### **Application**



DRYWALL TO LIGHT GUAGE



WOOD SUB FLOOR



#### **Finish**











Huttig-Grip<sup>™</sup> is a trademark of Woodgrain. Other product and company names listed may be trademarks of their respective owners. Woodgrain is not affiliated with the other products and companies listed.

## **HUTTIG-SPIN**

# **Collated Screws**

## **HUTTIG-SPIN**

rywall - Coarse Thread	89
rywall - Fine Thread	89
rywall - Self-Drill	
ood Subfloor	
utdoor - Premium	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov





### **Drywall Screw - Coarse Thread**

For attaching gypsum board and wood to wood studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, coarse thread for use with wood













Length >	Gauge	Drive	Point	Pail SKU	Pcs
PHOS	PHATE	COATED			
1-1/4" >	<b>6</b>	#2 Phillips	Sharp	HSPC114CT1MP	1,000
1-5/8"	6	#2 Phillips	Sharp	HSPC158CT1MP	1,000
2"	<b>7</b>	#2 Phillips	Sharp	HSPC72CT1MP	1,000



## **Drywall Screw - Fine Thread**

For attaching gypsum board to light-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- Sharp point, fine thread for use with light-gauge steel













Length	х	Gauge	Drive	Point	Pail SKU	Pcs
PHOS	SP	HATE	COATED			
1-1/4"	Х	6	#2 Phillips	Sharp	HSPC114FT1MP	1,000
1-5/8"	Χ	6	#2 Phillips	Sharp	HSPC158FT1MP	1,000
2"	х	7	#2 Phillips	Sharp	HSPC72FT1MP	1,000





## **Drywall Screw - Self-Drill**

For attaching gypsum board to heavy-gauge steel studs.

- Bugle-shaped head countersinks into the drywall, compacts material beneath, for smooth finish
- · Self-drill point, fine thread for use with steel













Length x Gauge	Drive	Point	Pail SKU	Pcs
1-1/4" x 6	#2 Phillips	Self-drill	HSPCQ114DWZ1MP	1,000



#### **HUTTIG-SPIN**



#### **Subfloor Screw**

For attaching plywood and OSB subfloor to floor joists.

- · Flat, countersink head with nibs for fewer head pops, smoother finish
- Coarse, serrated thread cuts through wood using less torque
- · Sharp point, coarse thread for use with wood











Available Finish



Length x Gauge	Drive	Point	Pail SKU	Pcs
YELLOW ZIN	IC			
1-3/4" x 8	#2 Square	Sharp	HSPC134SF1MP	1,000





## **Premium Outdoor Screw**

For deck, patio, and outdoor construction.

- Flat head sits flush. Nibs help to pull material from the hole, and to "seat" the head for smoother finished surface.
- PRESSURE TREATED LUMBER

- Coarse, serrated thread cuts through wood using less torque
- Type 17 point drills own hole, easier to drive into hardwoods
- Limited 50 year fastener warranty. See www.huttig-grip.com/warranty for complete details






















# **Collated Fasteners**

# **HUTTIG-GRIP** & **HUTTIG-GUARD**



# **HUTTIG-GRIP** & **HUTTIG-GUARD** Collated Fasteners

Color coded packaging help guide you to the four main categories by application.

**GENERAL** 

**OUTDOOR** 

ROOFING

STAINLESS STEEL

Collation icons identify the type of tool that the fasteners are designed to fit.

#### **TYPES/APPLICATIONS**

#### **FINISHES**

FRAMING	15° COIL NAL WIRE WELD WALL PLASTIC 28° WIRE WELD NAIL 30° METAL CONNECTOR NAIL PAPER	BRT EG ELECTRO GALVANIZED HOT GALVANIZED OUTDOOR GALVANIZED STAINLESS (INTERD WARRANT)
SIDING/ FENCE	COIL SIDING NAIL PLASTIC 150 COIL SIDING NAIL PLASTIC 150 COIL SIDING NAIL WIFE WELD	EG ELECTRO GALVANIZED  HOT GALVANIZED  GALVANIZED  LIFETIME STAINLESS LIMITED WARRANTY
ROOFING	RF ROOFING NAIL	ELECTRO GALVANIZED  HG HOT GALVANIZED  GALVANIZED  LIFETIME 51AINLE55 UNITED MARKATI LIFETIME 51AINLE55 UNITED MARKATI
LATH/ INSULATION	16 GA WIDE CROWN STAPLE  "BCS"-STYLE  16 GA WIDE CROWN STAPLE  "GSW"-STYLE  16 GA WIDE CROWN STAPLE  "P"-STYLE	EG ELECTRO GALVANIZED
SHEATHING	16 GA MEDIUM GROWN STAPLE "76"-STYLE "BCS"-STYLE "BCS"-STYLE "BCS"-STYLE "BCS"-STYLE "BCS"-STYLE "BCS"-STYLE "M"-STYLE "N"-STYLE	EG ELECTRO GALVANIZED STAINLESS UNITED WARDANT
FINISH/ TRIM	18 GA NARROW CROWN STAPLE "L"-STYLE "SX"-STYLE "SX"-STYLE	EG ELECTRO GALVANIZED  LIFETIME STAINLESS LIPETIME STAINLESS LIPETIME
FELT/WRAP	TACKER STAPLE  A11 TACKER STAPLE  A19 TACKER STAPLE  SHCR TACKER STAPLE  TACKER STAPLE	ELECTRO GALVANIZED  LIFETIME STAINLESS STAINLESS IMPRED WARRANTY
FINISH/ TRIM	15 GA ANGLED NAIL "FN"-STYLE "APPLED TABLE "AFF"-STYLE "SF"-STYLE	BRT BRIGHT  EG ELECTRO GALVANIZED  FINED WARRANT  FINED WARRANT  FINED WARRANT
FLOORING	FC	EG ELECTRO GALVANIZED

# **Collated Fasteners**

## **HUTTIG-GRIP** & **HUTTIG-GUARD**

Huttig-Grip
Collated Fasteners
Framing96
Framing - Metal Connectors102
Coil Framing103
Coil Framing - Pallets/Crates104
Siding/Fence105
Roofing106
Staples
Wide Crown108
Medium Crown109
Narrow Crown110
Tackers111
Finish & Trim
Finish & Trim114
Brads, Pin Nails, Flooring Cleats116
Huttig-Guard Stainless Steel
Collated Fasteners
Stainless Steel Framing118
Stainless Steel Siding/Fence119
Stainless Steel Siding/Fence
Stainless Steel Siding/Fence
Stainless Steel Siding/Fence
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       Medium Crown       122         Narrow Crown       122
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122         Finish & Trim       122
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122         Finish & Trim       124
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122         Finish & Trim       122
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122         Finish & Trim       124         Brads       126
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122         Finish & Trim       124         Brads       126         Specialty Programs
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122         Finish & Trim       124         Brads       126         Specialty Programs         Tub Program       128
Stainless Steel Siding/Fence       119         Stainless Steel Roofing       120         Staples       122         Medium Crown       122         Narrow Crown       122         Tackers       122         Finish & Trim       124         Brads       126         Specialty Programs

 $WARNING: Cancer\ and\ Reproductive\ Harm-www.P65Warnings.ca.gov$ ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

FRAMING, SIDING, JOIST HANGER NAILS

## **HUTTIG-GRIP**

# Framing, Siding & Roofing Nails




















#### **HOW TO READ THE ITEM NUMBER**

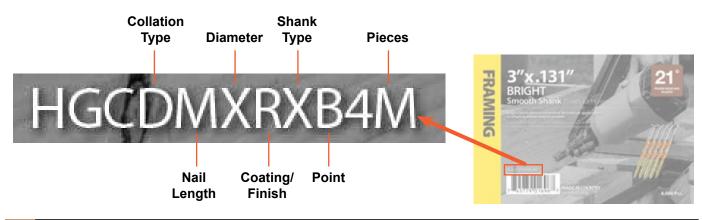

Collation Type	Code	Nail Length	Code	Shank Diameter	Code	Coating / Finish / Properties	Code	Shank Type	Code	Point	Code	Pieces	Code
0° Plastic Sheet	Α	1"	Α	.135"	0	HG Heat Treated	N	Ring	W	Standard	В	1,000	1M
15° Plastic Sheet	В	1-1/4"	В	.080"	Р	Bright High Carbon	0	Smooth	Χ	Blunt Chisel	С	2,000	2M
15° Wire	С	1-1/2"	С	.083"	Q	HG High Carbon	Р	Spiral	Υ	Blunt Diamond	D	2,500	25N
21° Plastic	D	1-3/4"	D	.086"	R	Bright Heat Treated	Q	Screw	Z			3,000	3M
28° RH Wire	G	1-7/8"	Е	.090"	S	Bright	R					4,000	4M
30° CH Paper	I	2"	F	.092"	Т	EG – Electro Galvanized	S					5,000	5M
30° Paper Joist	J	2-1/8"	G	.099"	U	HG – Hot Galvanized	Т						
30° RH Paper	L	2-1/4"	Н	.113"	٧	304 Stainless Steel	U						
		2-3/16"	I	.120"	W	316 Stainless Steel	٧						
		2-3/8"	J	.131"	Х	OG – Outdoor Galvanized	W						
		2-1/2"	K	.148"	Υ								
		2-3/4"	L	.162"	Z								
		3"	M										
		3-1/4"	N										
		3-3/8"	0										
		3-1/2"	Р										





# 21° Plastic Strip Round Head









Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 3.000 Piece	Box 4.000 Piece	Box 5.000 Piece
BRIGH		O.I.d.III	1,0001.000	3,000 1 1000	1,000 1 1000	3,000 1 1000
2"	.113"	Smooth	HGCDFVRXB1M	_	_	HGCDFVRXB5M
2-1/4"	.148"	Smooth	HGCDHYRXB1M	_	HGCDHYRXB4M	_
2-3/8"	.113"	Smooth	HGCDJVRXB1M	_	_	HGCDJVRXB5M
2-3/8"	.148"	Smooth	HGCDJYRXB1M	_	HGCDJYRXB4M	_
2-1/2"	.131"	Smooth	HGCDKXRXB1M	_	HGCDKXRXB4M	HGCDKXRXB5M
2-1/2"	.148"	Smooth	HGCDKXRXB1M	_	HGCDKXRXB4M	HGCDKXRXB5M
3"	.120"	Smooth	HGCDMWTWB1M	_	HGCDMWRXB4M	_
3"	.131"	Smooth	HGCDMXRXB1M	_	HGCDMXRXB4M	_
3-1/4"	.131"	Smooth	HGCDNXRXB1M	_	HGCDNXRXB4M	_
3-1/4"	.148"	Smooth	HGCDNYRXB1M	HGCDNYRXB3M	_	_
3-1/4"	.162"	Smooth	HGCDNYRXB1M	HGCDNYRXB3M	_	_
3-1/2"	.162"	Smooth	_	HGCDPZRXB3M	_	_
2-3/8"	.131"	Ring	_	_	_	HGCDJVRWB5M
2-3/8"	.148"	Ring	_	_	_	HGCDJVRWB5M
2-3/8"	.162"	Ring	_	_	_	HGCDJVRWB5M
2-1/2"	.131"	Ring	_	_	_	HGCDKXRWB5M
2-3/8"	.113"	Screw	_	_	_	HGCDJVRZB5M
2-3/8"	.148"	Screw	_	_	HGCDJYRZB4M	_
3"	.120"	Screw	_	_	HGCDMWRZB4M	_
3"	.131"	Screw	_	_	HGCDMXRZB4M	_
3-1/4"	.148"	Screw	_	_	HGCDNYRZB4M	_
ELECT	RO GAL	VANIZE	D			
2"	.113"	Smooth	_	_	_	HGCDFVSXB5M
2-3/8"	.113"	Smooth	-	_	_	HGCDJVSXB5M
2-1/2"	.131"	Smooth	_	_	_	HGCDKXSXB5M
3"	.120"	Smooth	-	_	HGCDMWSXB4M	_
3"	.131"	Smooth	_	_	HGCDMXSXB4M	_
3-1/4"	.131"	Smooth	-	_	HGCDNXSXB4M	_
3-1/2"	.120"	Smooth	_	_	HGCDPXSXB4M	_
2"	.113"	Ring	_	_	_	HGCDFVSWB5M
2-3/8"	.113"	Ring	_	_	_	HGCDJVSWB5M
3"	.131"	Ring	_	_	HGCDMXSWB4M	_







# 21° Plastic Strip Round Head - continued









Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 5,000 Piece
HOT GA	LVANIZ	ZED Z						
1-1/2"	.148"	Smooth		_	_	_	_	HGCDCYTXB5M
2"	.113"	Smooth	HGCDFVTXB1M	_	_	_	_	HGCDFVTXB5M
2-1/4"	.148"	Smooth	HGCDHYTXB1M	_	_	_	HGCDHYTXB4M	_
2-3/8"	.113"	Smooth	HGCDJVTXB1M	_	_	_	_	HGCDJVTXB5M
2-3/8"	.148"	Smooth	HGCDJYTXB1M	_	_	_	HGCDJYTXB4M	
2-1/2"	.131"	Smooth	HGCDKXTXB1M	_	_	_	HGCDKXTXB4M	HGCDKXTXB5M
2-1/2"	.148"	Smooth		_	_	_	HGCDKYTXB4M	_
3"	.120"	Smooth		_	_	_	HGCDMWTXB4M	_
3"	.131"	Smooth	HGCDMXTXB1M	_	_	_	HGCDMXTXB4M	_
3"	.148"	Smooth	HGCDMYTXB1M	_	_	_	HGCDMYTXB4M	_
3-1/4"	.120"	Smooth	HGCDNWTXB1M	_	_	_	HGCDNWTXB4M	_
3-1/4"	.131"	Smooth	HGCDNXTXB1M	HGCDNXTXB2M	_	_	HGCDNXTXB4M	_
3-1/4"	.148"	Smooth	HGCDNYTXB1M	_	_	HGCDNYTXB3M	HGCDNXTXB4M	_
3-3/8"	.131"	Smooth		_	_	_	HGCDOXTXB4M	_
3-1/2"	.131"	Smooth	HGCDPXTXB1M	_	_	_	HGCDPXTXB4M	_
3-1/2"	.162"	Smooth		_	HGCDPZTXB25M	HGCDPZTXB3M	_	_
2"	.113"	Ring	HGCDFVTWB1M			_		HGCDFVTWB5M
2-3/8"	.113"	Ring	HGCDJVTWB1M	HGCDJVTWB2M	HGCDJVTWB25M	_		HGCDJVTWB5M
2-3/8"	.120"	Ring		_	_	_		HGCDJWTWB5M
2-1/2"	.131"	Ring		_	_	_	HGCDKXTWB4M	HGCDKXTWB5M
3"	.120"	Ring	HGCDMWTWB1M	HGCDMWTWB2M	_	_	HGCDMWTWB4M	
3"	.131"	Ring	HGCDMXTWB1M	_	_	_	HGCDMXTWB4M	
3-1/4"	.131"	Ring	_	_	_	_	HGCDNXTWB4M	
2-3/8"	.113"	Screw		_	_	_	_	_
2-3/8"	.148"	Screw		_	_	_	HGCDJYTZB4M	_
2-1/2"	.131"	Screw		_	_	_	HGCDKXTZB4M	_
3"	.120"	Screw	HGCDMWTZB1M	_	_	_	HGCDMWTZB4M	_
3"	.131"	Screw		_	_	_	HGCDMXTZB4M	_
3-1/4"	.120"	Screw		HGCDNWTZB2M	_	_	HGCDNWTZB4M	_
3-1/4"	.131"	Screw		_	_	_	HGCDNXTZB4M	_





# 21° Plastic Strip Round Head - continued









Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 5,000 Piece
OUTDO	OR GAL	.VANIZI	ED					
2"	.113"	Smooth	_	_	_	_		HGCDFVWXB5M
2-3/8"	.113"	Smooth	_	_	_	_		HGCDJVWXB5M
2-1/2"	.131"	Smooth	HGCDKXWXB1M	_	_	_	HGCDKXWXB4M	HGCDKXWXB5M
3"	.120"	Smooth	_	_	_	_	HGCDMWWXB4M	
3"	.131"	Smooth	HGCDMXWXB1M	_	_	_	HGCDMXWXB4M	
3-1/4"	.131"	Smooth	HGCDNXWXB1M	_	_	_	HGCDNXWXB4M	
2"	.113"	Ring	HGCDFVWWB1M	_	_	_	_	HGCDFVWWB5M
2-3/8"	.113"	Ring	_	_	_	_	_	HGCDJVWWB5M
3"	.120"	Ring	HGCDMWWWB1M	_	_	_	_	_
3-1/4"	.131"	Ring	HGCDNXWWB1M	_	_	_	HGCDNXWWB4M	_
3"	.131"	Screw	_	_	_	_	HGCDMXWZB4M	_



Product availability varies by location.

**COLLATED FASTENERS** 

# **HUTTIG-GRIP**



# 28° Wire Weld Offset Round Head







	Shank		Tub	Вох	Вох
Length	Diameter	Shank	1,000 Piece	2,000 Piece	2,500 Piece
BRIGHT					
2"	.113"	Smooth	_	_	HGCGFVRXB25M
2-3/8"	.113"	Smooth	_	_	HGCGJVRXB25M
2-3/8"	.120"	Smooth	_	_	HGCGJWRXB25M
3"	.120"	Smooth	_	HGCGMWRXB2M	_
3"	.131"	Smooth	_	HGCGMXRXB2M	_
3-1/4"	.120"	Smooth	_	HGCGNWRXB2M	_
3-1/4"	.131"	Smooth	HGCGNXRXB1M	HGCGNXRXB2M	_
3-1/2"	.131"	Smooth	HGCGPXRXB1M	HGCGPXRXB2M	_
2"	.113"	Ring	_	_	HGCGFVRWB25M
2-3/8"	.113"	Ring	HGCGJVRWB1M	_	HGCGJVRWB25M
2-3/8"	.113"	Ring	_	_	HGCGJWRWB25M
HOT G	ALVANIZ	ZED			
<b>HOT G</b> /2"	.113"	Smooth	_	_	HGCGFVTXB25M
			- -	— HGCGNWTXB2M	HGCGFVTXB25M
2"	.113"	Smooth	- - -	— HGCGNWTXB2M HGCGPXTXB2M	HGCGFVTXB25M — —
2" 3-1/4"	.113" .120"	Smooth Smooth	- - -		HGCGFVTXB25M  -  HGCGFVTWB25M
2" 3-1/4" 3-1/2"	.113" .120" .131"	Smooth Smooth Smooth	— — — — HGCGJWTWB1M		_ _
2" 3-1/4" 3-1/2" 2" 2-3/8"	.113" .120" .131" .113" .120"	Smooth Smooth Smooth Ring		HGCGPXTXB2M	— — HGCGFVTWB25M
2" 3-1/4" 3-1/2" 2" 2-3/8"	.113" .120" .131" .113" .120"	Smooth Smooth Smooth Ring Ring		HGCGPXTXB2M	— — HGCGFVTWB25M
2" 3-1/4" 3-1/2" 2" 2-3/8"	.113" .120" .131" .113" .120"	Smooth Smooth Smooth Ring Ring VANIZE		HGCGPXTXB2M	— HGCGFVTWB25M HGCGJWTWB25M
2" 3-1/4" 3-1/2" 2" 2-3/8" OUTDO 2"	.113" .120" .131" .113" .120" OR GAL .113"	Smooth Smooth Smooth Ring Ring VANIZE Smooth		HGCGPXTXB2M	HGCGFVTWB25M HGCGJWTWB25M HGCGFVWXB25M
2" 3-1/4" 3-1/2" 2" 2-3/8"  OUTDO 2" 2-3/8"	.113" .120" .131" .113" .120" OR GAL .113" .113"	Smooth Smooth Smooth Ring Ring VANIZE Smooth Smooth	- -	HGCGPXTXB2M	HGCGFVTWB25M HGCGJWTWB25M HGCGFVWXB25M
2" 3-1/4" 3-1/2" 2" 2-3/8" OUTDO 2" 2-3/8" 3"	.113" .120" .131" .113" .120" OR GAL .113" .113" .120"	Smooth Smooth Smooth Ring Ring VANIZE Smooth Smooth Smooth	— — HGCGMWWXB1M	HGCGPXTXB2M  HGCGMWWXB2M	HGCGFVTWB25M HGCGJWTWB25M HGCGFVWXB25M
2" 3-1/4" 3-1/2" 2" 2-3/8"  OUTDO 2" 2-3/8" 3" 3-1/4"	.113" .120" .131" .113" .120" <b>OR GAL</b> .113" .113" .120" .131"	Smooth Smooth Smooth Ring Ring VANIZE Smooth Smooth Smooth Smooth	— — HGCGMWWXB1M	HGCGPXTXB2M  HGCGMWWXB2M	HGCGFVWXB25M HGCGJWTWB25M HGCGJVWXB25M HGCGJVWXB25M —





### 30° Paper Tape Clipped Head

**Available Finishes** 







Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 5,000 Piece
BRIGH'	г					
2"	.113"	Smooth	HGCIFVRXB1M	_	HGCIFVRXB25M	_
2-3/8"	.120"	Smooth	HGCIJVRXB1M	_	HGCIJVRXB25M	HGCIJVRXB5M
3"	.120"	Smooth	HGCIMWRXB1M	HGCIMWRXB2M	HGCIMWRXB25M	_
3"	.131"	Smooth	HGCIMXRXB1M	HGCIMXRXB2M	HGCIMXRXB25M	_
3-1/4"	.120"	Smooth	HGCINWRXB1M	_	HGCINWRXB25M	_
3-1/4"	.131"	Smooth	HGCINXRXB1M	HGCINXRXB2M	HGCINXRXB25M	_
3-1/2"	.131"	Smooth	_	HGCIPXRXB2M	_	_
2"	.113"	Ring	_	_	HGCIFVRWB25M	_
2-3/8"	.113"	Ring	HGCIJVRWB1M	_	HGCIJVRWB25M	_
3"	.120"	Ring	_	HGCIMWRWB2M	_	_
HOT G	ALVANIZ	ZED				
2"	.113"	Smooth	_	_	HGCIFVTXB25M	_
2-3/8"	.113"	Smooth	_	_	HGCIJVTXB25M	_
3"	.120"	Smooth	_	HGCIMWTXB2M		_
3"	.131"	Smooth	_	HGCIMXTXB2M		_
3-1/4"	.131"	Smooth	_	HGCINXTXB2M		_
2"	.113"	Ring	HGCIFVTWB1M	_	HGCIFVTWB25M	_
2-3/8"	.113"	Ring	HGCIJVTWB1M	_	HGCIJVTWB25M	_
3"	.120"	Ring	HGCIMWTWB1M	HGCIMWTWB2M	HGCIMWWWB25M	_
3-1/4"	.120"	Ring	_	HGCINWTWB2M		_
OUTDO	OR GAL	VANIZE	D			
2"	.113"	Smooth	_	_	HGCIFVWXB25M	_
2-3/8"	.113"	Smooth	_	_	HGCIJVWXB25M	_
3"	.120"	Smooth	_	HGCIMXWXB2M	_	_
3-1/4"	.131"	Smooth	_	HGCINXWXB2M	HGCINXWXB25M	_
2"	.113"	Ring	_	_	HGCIFVWWB25M	_
2-3/8"	.113"	Ring	_	_	HGCIJVWWB25M	_
3"	.120"	Ring	_	HGCIMWWWB2M	HGCIMWWWB25M	_
3-1/4"	.120"	Ring	_	HGCINWWWB2M	_	_







### 30° Paper Tape Offset Round Head

**Available Finishes** 





Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 5,000 Piece
BRIGH	Т		,	,	,	,
2"	.113"	Smooth	_	_	HGCLFVRXB25M	_
2-3/8"	.113"	Smooth	_	_	HGCLJVRXB25M	_
2-1/2"	.131"	Smooth	_	_	HGCLKXRXB25M	_
3"	.120"	Smooth	HGCLMWRXB1M	HGCLMWRXB2M	HGCLMWRXB25M	_
3"	.131"	Smooth	HGCLMXRXB1M	HGCLMXRXB2M	HGCLMXRXB25M	_
3-1/4"	.120"	Smooth	_	HGCLNWRXB2M	_	_
3-1/4"	.131"	Smooth	_	HGCLNXRXB2M	_	_
3-1/2"	.131"	Smooth	_	HGCLPXRXB2M	_	_
2-3/8"	.113"	Ring	HGCLJVRWB1M	_	HGCLJVRWB25M	HGCLJVRWB5M
HOT G	ALVANIZ	ZED				
3"	.131"	Smooth	_	HGCLMXTXB2M	HGCLMXTXB25M	_
3-1/4"	.131"			l		
• ., .	.131	Smooth	HGCLNXTXB1M	HGCLNXTXB2M	HGCLNXTXB25M	_
3-1/2"	.131"	Smooth Smooth	HGCLNXTXB1M —	HGCLNXTXB2M HGCLPXTXB2M	HGCLNXTXB25M —	_
			HGCLNXTXB1M — —		HGCLNXTXB25M — HGCLFVTWB25M	_ _ _
3-1/2"	.131"	Smooth	HGCLNXTXB1M  —  HGCLJVTWB1M		_	_ _ _ _
3-1/2"	.131"	Smooth	_ _		HGCLFVTWB25M	- - - -
3-1/2" 2" 2-3/8"	.131" .113" .113"	Smooth Ring Ring	— — HGCLJVTWB1M		HGCLFVTWB25M	- - - - -
3-1/2" 2" 2-3/8" 3"	.131" .113" .113" .120"	Smooth Ring Ring Ring	— — HGCLJVTWB1M	HGCLPXTXB2M  —  —  —	HGCLFVTWB25M	- - - - - -
3-1/2" 2" 2-3/8" 3" 3-1/4" 3-1/4"	.131" .113" .113" .120" .120" .131"	Smooth Ring Ring Ring Ring	— HGCLJVTWB1M HGCLMWTWB1M —	HGCLPXTXB2M  HGCLNWTWB2M	HGCLFVTWB25M	- - - - - -
3-1/2" 2" 2-3/8" 3" 3-1/4" 3-1/4"	.131" .113" .113" .120" .120" .131"	Smooth Ring Ring Ring Ring Ring Ring	— HGCLJVTWB1M HGCLMWTWB1M —	HGCLPXTXB2M  HGCLNWTWB2M	HGCLFVTWB25M	- - - - - -







### 30° Paper Tape Joist Hanger Nail

Available Finishes









Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece
BRIGH	T - HARI	DENED			'		
1-1/2"	.131"	Smooth	HGCJCXRXB1M	_	<del>_</del>	_	HGCJCXRXB4M
1-1/2"	.148"	Smooth	HGCJKXRXB1M	_	_	HGCJCYRXB3M	_
2-1/2"	.131"	Smooth	HGCJCYRXB1M	_	HGCJKXRXB25M	_	_
2-1/2"	.148"	Smooth	HGCJKYRXB1M	_	HGCJKYRXB25M	_	_
2-1/2"	.162"	Smooth	HGCJKZRXB1M	HGCJKZRXB2M	_	_	_
ELECT	RO GAL	VANIZE	- HARDENED				
1-1/2"	.131"	Smooth	_	_	_	_	HGCJCXSXB4M
HOT G	ALVANIZ	ZED - HA	RDENED				
1-1/2"	.131"	Smooth	HGCJCXTXB1M	_	_	_	HGCJCXTXB4M
1-1/2"	.148"	Smooth	HGCJCYTXB1M	_	_	HGCJCYTXB3M	_
2-1/2"	.131"	Smooth	_	_	HGCJKXTXB25M	_	_
2-1/2"	.148"	Smooth	HGCJKYTXB1M	_	HGCJKYTXB25M	_	_
2-1/2"	.162"	Smooth	_	HGCJKZTXB2M	_	_	_



www.huttig-grip.com



3-1/4"

3-1/2"

2-3/8"

2-1/2"

3"

.131"

.131"

.113"

.113"

.131"

.131"

Smooth

Smooth

Ring

Ring

Ring

Ring

HGCCNXRXB25M

### 15° Wire Coil

Available Finishes



HGCCNXRXB45M

HGCCJVRWB45M

HGCCKXRWB45M

HGCCMWRWB45M



HGCCFVRWB5M

HGCCJVRWB5M





Length	Shank Diameter	Shank	Box 2,500 Piece	Box 3,000 Piece	Box 4,000 Piece	Box 4,500 Piece	Box 5,000 Piece
BRIGH'	т						
2"	.113"	Smooth	_	HGCCFVRXB3M	_	_	HGCCFVRXB5M
2-3/8"	.113"	Smooth	_	HGCCJVRXB3M	_	_	HGCCJVRXB5M
2-1/2"	.131"	Smooth	_	HGCCKXRXB3M	_	HGCCKXRXB45M	_
3"	.120"	Smooth	HGCCMWRXB25M	_	HGCCMWRXB4M	HGCCMWRXB45M	_
3"	.131"	Smooth	HGCCMXRXB25M	_	HGCCMXRXB4M	HGCCMXRXB45M	_
3-1/4"	120"	Smooth	HGCCNWRXR25M	_	HGCCNWRXR4M	_	_

HGCCJVRWB3M

HGCCPXRXB4M

HGCCJVRWB4M

UEET ME
STAINLESS
LIMITED WARRANTY

ELECT	RO GAL	VANIZE	D				
3-1/4"	.131"	Smooth	_	_	_	HGCCNXSXB45M	_
2-3/8"	.113"	Ring	_	_	_	_	HGCCJVSWB5M
2-1/2"	.131"	Ring	_	_	_	HGCCKXSWB45M	_
3"	.120"	Ring	_	_	_	HGCCMWSWB45M	_
3"	.131"	Ring	_	_	_	HGCCMXSWB45M	_
3-1/4"	.120"	Ring	_	_	_	_	_
3-1/4"	.131"	Ring	_	_	_	HGCCNXSWB45M	_
HOT GA	LVANI	ZED					
2-3/8"	.113"	Smooth	_	HGCCJVTXB3M	_	_	_
2-1/2"	.131"	Smooth	_	HGCCKXTXB3M	_	HGCCKXTXB45M	_
3"	.120"	Smooth	HGCCMWTXB25M	_	_	HGCCMWTXB45M	_
3"	.131"	Smooth	HGCCMXTXB25M	_	HGCCMXTXB4M	_	_
3-1/4"	.120"	Smooth	HGCCNWTXB25M	_	HGCCNWTXB4M	_	_
3-1/4"	.131"	Smooth	HGCCNXTXB25M	_	_	_	_
3-1/2"	.131"	Smooth	_	_	HGCCPXTXB4M	_	_
2-3/8"	.113"	Ring	_	HGCCJVTWB3M	_	_	HGCCJVTWB5M
2-1/2"	.131"	Ring	_	_	_	HGCCKXTWB45M	_
3"	.120"	Ring	_	_	_	HGCCMWTWB45M	_
3-1/4"	.120"	Ring	HGCCNWTWB25M	_	_	_	_
OUTDO	OR GAI	LVANIZI	D				
2"	.113"	Smooth	_	HGCCFVWXB3M	_	_	_
2-3/8"	.113"	Smooth	_	HGCCJVWXB3M	_	_	_
2-1/2"	.131"	Smooth	_	HGCCKXWXB3M	_	_	_
3"	.131"	Smooth	HGCCMXWXB25M	_	_	_	_
3-1/4"	.131"	Smooth	HGCCNXWXB25M	_	_	_	_
2"	.113"	Ring	_	HGCCFVWWB3M	_	_	_
2-3/8"	.113"	Ring	<del>-</del>	HGCCJVWWB3M	_	_	_
3"	.120"	Screw	_	_	HGCCMWWZB4M	_	_
2-3/8"	.113" .120"	Ring Screw	_	HGCCJVWWB3M	— — HGCCMWWZB4M	_ _ _	_ _ _



### 15° Wire Coil - Pallets/Crates

**Available Finishes** 









Length	Shank Diameter	Shank	Point	Box 3,000 Piece	Box 4,500 Piece	Box 9,000 Piece	
BRIGH'	Г						
2"	.099"	Smooth	Standard	HGCCFURXB3M	_	_	
2-3/8"	.099"	Smooth	Standard	HGCCJURXB3M	_	_	
2"	.099"	Ring	Standard	HGCCFURWB3M	_	_	
2-3/8"	.099"	Ring	Standard	HGCCJURWB3M	_		
1-3/4"	.099"	Screw	Blunt Diamond Point	_	_	HGCCDURZD9M	
2"	.099"	Screw	Blunt Diamond Point	_	_	HGCCFURZD9M	
2-1/4"	.099"	Screw	Blunt Diamond Point	_	_	HGCCHURZD9M	
BRIGH'	T - HEAT	TREATI	ĒD				
1-1/2"	.113"	Smooth	Standard	_	HGCCCVQXB45M	_	
2-1/4"	.099"	Smooth	Standard	_	_	HGCCHUQXB9M	
2-1/4"	.113"	Smooth	Standard	_	HGCCHVQXB45M	_	
ELECT	RO GAL	/ANIZED					
2"	.099"	Ring	Standard	_	_	HGCCFUSWB9M	
2-1/2"	.099"	Ring	Standard	_	_	HGCCKUSWB9M	
HOT G	ALVANIZ	ED.					
2-3/8"	.099"	Smooth	Standard	HGCCJUTXB3M	_	_	
2"	.099"	Ring	Standard	HGCCFUTWB3M	_	_	
2-3/8"	.099"	Ring	Standard	HGCCJUTWB3M	_	_	
OUTDO	OR GAL	VANIZEI	D				
2"	.099"	Ring	Standard	HGCCFUWWB3M	_	_	



**COLLATED FASTENERS** 





### 15° Wire Coil - Siding/Fence

Length	Shank Diameter	Shank	Tub 1,200 Piece	Box 3,000 Piece	Box 3,600 Piece
ELECT	RO GAL	VANIZEC			
2-3/16"	.092"	Smooth	<del>_</del>	HGCCITSXB36M	_
1-3/4"	.092"	Ring	_	_	HGCCDTSWB9M
2"	.092"	Ring	_	HGCCFTSWB36M	_
HOT G	ALVANIZ	ZED			
2"	.092"	Smooth	<del>_</del>	HGCCFTTXB36M	_
2-3/16"	.092"	Smooth	HGCCITTXB12M	HGCCITTXB36M	_
2-1/2"	.092"	Smooth	_	HGCCKTTXB36M	_
1-1/4"	.092"	Ring	<del>_</del>	HGCCBTTWB36M	_
1-1/2"	.092"	Ring	_	HGCCCTTWB36M	_
1-3/4"	.080"	Ring	_	HGCCDPTWB36M	_
1-3/4"	.092"	Ring	HGCCDTTWB12M	HGCCDTTWB36M	_
2"	.086"	Ring	_	HGCCFRTWB36M	_
2"	.092"	Ring	HGCCFTTWB12M	HGCCFTTWB36M	_
2-3/16"	.092"	Ring	HGCCITTWB12M	HGCCITTWB36M	_
2-1/4"	.092"	Ring	HGCCHTTWB12M	HGCCHTTWB36M	_
2-1/2"	.092"	Ring	_	HGCCKTTWB36M	_

Available Finishes












Product availability varies by location.



### **Coil Roofing Nails**

Length	Shank Diameter	Shank	Tub 840 Piece	Box 7,200 Piece
ELECT	RO GAL	VANIZED		
3/4"	.120"	Smooth	_	HGC34EGCRFG
7/8"	.120"	Smooth	HGC78EGCRFGT	HGC78EGCRFG
1"	.120"	Smooth	HGC1EGCRFGT	HGC1EGCRFG
1-1/4"	.120"	Smooth	HGC114EGCRFGT	HGC114EGCRFG
1-1/2"	.120"	Smooth	HGC112EGCRFGT	HGC112EGCRFG
1-3/4"	.120"	Smooth	HGC134EGCRFGT	HGC134EGCRFG
3/4"	.120"	Ring	_	HGC34EGRCRFG
1"	.120"	Ring	_	HGC1EGRCRFG
1-1/4"	.120"	Ring	_	HGC114EGRCRFG
1-1/2"	.120"	Ring	_	HGC112EGRCRFG
1-3/4"	.120"	Ring	_	HGC134EGRCRFG
HOT G	ALVANIZ	ZED		



Available Finishes









# **HUTTIG-GRIP** Collated Staples






























### **HOW TO READ THE ITEM NUMBER**

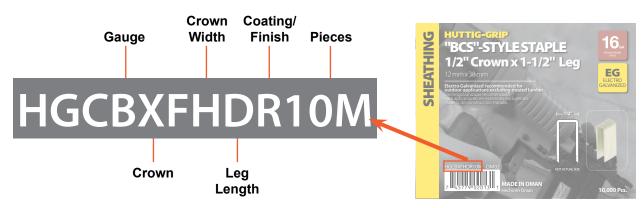

Gauge	Code	Crown	Code	Style	Code	Crown Width	Code	Leg Length	Code	Coating / Finish	Code	Piece	Code
18	Α	Narrow	W	"L"-Style	Α	7/32"	D	1/4"	Q	EG – Electro Galvanized	R	1,000	1M
16	В	Medium	Χ	"N"-Style	С	1/4"	Е	5/16"	Р	HG – Hot Galvanized	S	2,000	2M
15-1/2	С	Wide	Υ	"76"-Style	D	3/8"	F	3/8"	0	304 Stainless Steel	T	2,500	25M
20	D	Tacker	Z	"GS"-Style	Е	7/16"	G	1/2"	N	316 Stainless Steel	U	3,000	3M
23	Е			"BCS"-Style	F	1/2"	Н	9/16"	М			4,000	4M
				"GSW"-Style	G	15/16"	1	5/8"	L			5,000	5M
				"P"-Style	Н	1"	J	3/4"	K			10,000	10M
				"A11"-Style Tacker	L			7/8"	J				
				"50"-Style Tacker	N			1"	I				
				"A19"-Style Tacker	0			1-1/4"	F				
				"STCR"-Style	Р			1-3/8"	Е				
				"SHCR"-Style	Q			1-1/2"	D				
								1-3/4"	С				
								2"	В				
								2-1/4"	Α				

Product availability varies by location.

WIDE, MEDIUM, NARROW CROWN & TACKER STAPLES



### "BCS"-Style

Available Finish





Gauge	Crown	Leg	Box 10,000 Piece
ELEC.	TRO G	ALVAN	IZED
16	1"	3/4"	HGCBYFJKR10M
16	1"	7/8"	HGCBYFJJR10M
16	1"	1"	HGCBYFJIR10M
16	1"	1-1/4"	HGCBYFJFR10M
16	1"	1-1/2"	HGCBYFJDR10M
16	1"	1-3/4"	HGCBYFJCR10M



### "GSW"-Style





Gauge	Crown	Leg	Box 10,000 Piece
ELEC	TRO G	ALVAN	IZED
16	15/16"	5/8"	HGCBYGILR10M
16	15/16"	7/8"	HGCBYGIJR10M
16	15/16"	1"	HGCBYGIIR10M
16	15/16"	1-1/4"	HGCBYGIFR10M
16	15/16"	1-1/2"	HGCBYGIDR10M
16	15/16"	1-3/4"	HGCBYGICR10M
16	15/16"	2"	HGCBYGIBR10M

### "P"-Style

Available Finish





Gauge	Crown	Leg	Box 10,000 Piece
	ELEC.	TRO G	ALVANIZED
16	1"	5/8"	HGCBYHJLR10M
16	1"	3/4"	HGCBYHJKR10M
16	1"	7/8"	HGCBYHJJR10M
16	1"	1"	HGCBYHJIR10M
16	1"	1-1/4"	HGCBYHJFR10M
16	1"	1-1/2"	HGCBYHJDR10M
16	1"	1-3/4"	HGCBYHJCR10M
16	1"	2"	HGCBYHJBR10M



### "BCS"-Style



Available Finish

EG GALVANIZED

Gauge ELEC	Crown TRO G	Leg ALVAN	Box 10,000 Piece
16	1/2"	1-1/2"	HGCBXFHDR10M
16	1/2"	1-3/4"	HGCBXFHCR10M
16	1/2"	2"	HGCBXFHBR10M



### "GS"-Style



Available Finish EG GALVANIZED

Gauge	Crown	Leg	Box 10,000 Piece
ELEC.	TRO G	ALVAN	IZED
16	1/2"	1-1/4"	HGCBXEHFR10M
16	1/2"	1-1/2"	HGCBXEHDR10M
16	1/2"	1-3/4"	HGCBXEHCR10M
16	1/2"	2"	HGCBXEHBR10M



### "N"-Style



**Available Finishes** 





Gauge	Crown	Leg	Box 10,000 Piece
ELEC	TRO G	ALVAN	IZED
16	7/16"	1"	HGCBXCGIR10M
16	7/16"	1-1/4"	HGCBXCGFR10M
16	7/16"	1-1/2"	HGCBXCGDR10M
16	7/16"	1-3/4"	HGCBXCGCR10M
16	7/16"	2"	HGCBXCGBR10M



"76"-Style



Available Finish



Gauge	Crown	Leg	Box 10,000 Piece
ELEC.	TRO G	ALVAN	IZED
16	7/16"	1-1/4"	HGCBXDGFR10M
16	7/16"	1-1/2"	HGCBXDGDR10M
16	7/16"	1-3/4"	HGCBXDGCR10M
16	7/16"	2"	HGCBXDGBR10M



## "L"-Style



### **Available Finishes**





Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master			
ELEC	ELECTRO GALVANIZED								
18	1/4"	5/8"	HGCAWAELR5M	6	HGCAWAELR1M	5			
18	1/4"	3/4"	HGCAWAEKR5M	6	HGCAWAEKR1M	5			
18	1/4"	7/8"	HGCAWAEJR5M	6	HGCAWAEJR1M	5			
18	1/4"	1"	HGCAWAEIR5M	6	HGCAWAEIR1M	5			
18	1/4"	1-1/8"	HGCAWAEHR5M	6	HGCAWAEHR1M	5			
18	1/4"	1-1/4"	HGCAWAEFR5M	6	HGCAWAEFR1M	5			
18	1/4"	1-1/2"	HGCAWAEDR5M	6	HGCAWAEDR1M	5			





### "SX"-Style



Available Finish

EG ELECTRO GALVANIZED

Gauge	Crown	Leg	Box 5,000 Piece					
ELEC.	ELECTRO GALVANIZED							
18	7/32"	1-1/2"	HGCAWBDDR5M					










## "SHCR"-Style



Available Finish EG ELECTRO GALVANIZED

Gauge <b>ELEC</b>	Crown	Leg ALVAN	Box 5,000 Piece	Boxes / shipper
20	3/8"	1/4"	HGCDZQFQR5M	20
20	3/8"	3/8"	HGCDZQFOR5M	20



### "STCR"-Style





Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper
ELEC.	TRO G	ALVAN	IZED	
20	7/16"	1/4"	HGCDZPGQR5M	20
20	7/16"	3/8"	HGCDZPGOR5M	20



**COLLATED FASTENERS** 

# **HUTTIG-GRIP** Collated Finish & Trim Fasteners
















### **HOW TO READ THE ITEM NUMBER**

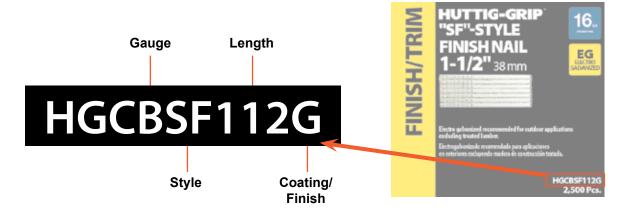

	Gauge	Code	Style	Code	Length	Code	Coating / Finish	Code
SI	15	Α	"DA"-Style	DA	1/2"	12	Bright	В
	16	В	"FN"-Style	FN	9/16"	916	EG – Electro Galvanized	G
D NA	18	С	"SF"-Style	SF	5/8"	58	304 Stainless Steel	S4
BRA	20	D	"AF"-Style	AF	3/4"	34	316 Stainless Steel	S6
FINISH & BRAD NAILS	23	Е	Brad	BD	7/8"	78		
E S			Pin	PN	1"	1		
			Cleat	CL	1-1/8"	118		
					etc.			





### 15 gauge "DA"-Style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELEC	TRO GALVANIZI	ĒD		
1-1/4"	HGCADA114G	4	HGCADA114G1M	5
1-1/2"	HGCADA112G	4	HGCADA112G1M	5
1-3/4"	HGCADA134G	4	HGCADA134G1M	5
2"	HGCADA2G	4	HGCADA2G1M	5
2-1/4"	HGCADA214G	2	_	_
2-1/2"	HGCADA212G	2	HGCADA212G1M	5

Available Finishes








### 15 gauge "FN"-Style Angled Finish Nail

**Available Finishes** 











### **16 gauge Angled Finish Nail**

Box Size 2,000 Piece		Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master		
ELECTRO GALVANIZED						
1"	HGCBAF1G	10	_	_		
1-1/4"	HGCBAF114G	10	HGCBAF114G1M	5		
1-1/2"	HGCBAF112G	10	HGCBAF112G1M	5		
1-3/4"	HGCBAF134G	10	_	_		
2"	HGCBAF2G	10	HGCBAF2G1M	5		
2-1/2"	HGCBAF212G	8	HGCBAF212G1M	5		





### 16 gauge Straight Finish Nail

3F -3111	-			
Size	Box 2,500 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELEC	TRO GALVANIZ	ZED ZED		
3/4"	HGCBSF34G	10	HGCBSF34G1M	5
7/8"	HGCBSF78G	10	HGCBSF78G1M	5
1"	HGCBSF1G	10	HGCBSF1G1M	5
1-1/8"	HGCBSF118G	10	HGCBSF118G1M	5
1-1/4"	HGCBSF114G	10	HGCBSF114G1M	5
1-1/2"	HGCBSF112G	10	HGCBSF112G1M	5
1-3/4"	HGCBSF134G	10	HGCBSF134G1M	5
2"	HGCBSF2G	10	HGCBSF2G1M	5
2-1/4"	HGCBSF214G	8	HGCBSF214G1M	5
2-1/2"	HGCBSF212G	8	HGCBSF212G1M	5



### 18 gauge Brad Nail

Size	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
ELEC.	TRO GALVANIZE			
5/8"	HGCCBD58G	10	HGCCBD58G1M	5
3/4"	HGCCBD34G	10	HGCCBD34G1M	5
1"	HGCCBD1G	10	HGCCBD1G1M	5
1-1/8"	HGCCBD118G	10	HGCCBD118G1M	5
1-3/16"	HGCCBD1316G	10	HGCCBD1316G1M	5
1-1/4"	HGCCBD114G	10	HGCCBD114G1M	5
1-1/2"	HGCCBD112G	10	HGCCBD112G1M	5
1-3/4"	HGCCBD134G	10	HGCCBD134G1M	5
2"	HGCCBD2G	10	HGCCBD2G1M	5





### 23 gauge Pin Nail

Size	Clamshell 2,000 Piece	Clamshells / master
ELEC.	TRO GALVANIZ <mark>I</mark>	ĒD
1/2"	HGCEPN12G2M	10
5/8"	HGCEPN58G2M	10
3/4"	HGCEPN34G2M	10
1"	HGCEPN1G2M	10
1-3/16"	HGCEPN1316G2M	10





### "L"-Style Flooring Cleat

Size	Gauge	Clamshell 1,000 Piece	Clamshells / master
ELECT	RO GALV	ANIZED	
1-1/2"	16	HGCBCL112G	5
2"	16	HGCBCL2G	5



Product availability varies by location.

www.huttig-grip.com

## **HUTTIG-GUARD**<sup>™</sup> Stainless Steel Framing, Siding & Roofing Nails Limited Lifetime Fastener Warranty



Recommended for use outdoors, with treated lumber, and in other high-corrosive environments.










### **HOW TO READ THE ITEM NUMBER**

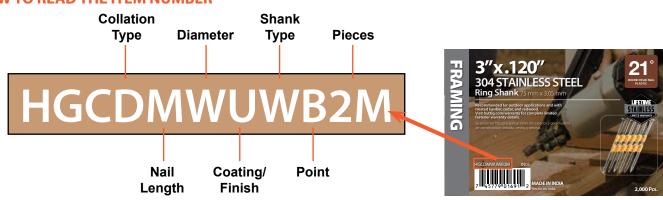

Collation Type	Code	Nail Length	Code	Shank Diameter	Code	Coating / Finish / Properties	Code	Shank Type	Code	Point	Code	Pieces	Co
15° Wire	С	1"	Α	.135"	0	304 Stainless Steel	U	Ring	W	Standard	В	1,000	1M
21° Plastic	D	1-1/4"	В	.080"	Р	316 Stainless Steel	V	Smooth	Χ	Blunt Chisel	С	2,000	2N
		1-1/2"	С	.083"	Q			Spiral	Υ	Blunt Diamond	D	2,500	25
		1-3/4"	D	.086"	R			Screw	Z			3,000	31
		1-7/8"	Е	.090"	S							4,000	41
		2"	F	.092"	Т							5,000	51
		2-1/8"	G	.099"	U								
		2-1/4"	Н	.113"	٧								
		2-3/16"	1	.120"	W								
		2-3/8"	J	.131"	Χ								
		2-1/2"	K	.148"	Υ								
		2-3/4"	L	.162"	Z								
		3"	М										
		3-1/4"	N										

Product availability varies by location.

FRAMING, SIDING, ROOFING NAILS



### **Stainless Steel** 21° Plastic Strip Round Head

**HUTTIG-GUARD** 

Length	Shank Diameter	Shank	Tub 1,000 Piece	Box 2,000 Piece
304 ST	AINLES	S STEEL		
2"	.113"	Ring	HGCDFVUWB1M	HGCDJVUWB2M
2-3/8"	.113"	Ring	HGCDJVUWB1M	_
2-3/8"	.120"	Ring	HGCDJWUWB1M	HGCDJWUWB2M
2-1/2"	.120"	Ring	_	_
3"	.120"	Ring	HGCDMWUWB1M	HGCDMWUWB2M
3"	.131"	Ring	HGCDMXUWB1M	_
3-1/4"	.120"	Ring	_	HGCDNWUWB2M
3-1/4"	.131"	Ring	HGCDNXUWB1M	HGCDNXUWB2M







### **Stainless Steel** 15° Wire Coil - Framing

Length	Shank Diameter	Shank	Box 2,500 Piece				
304 ST	AINLES	S STEEL					
3"	.120"	Smooth	HGCCMWUWB25M				



Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.

## 15°

### Stainless Steel 15° Wire Coil - Siding/Fence

	Shank		Tub	Box						
Length	Diameter	Shank	1,200 Piece	3,600 Piece						
304 ST	304 STAINLESS STEEL									
1-1/4"	.090"	Ring	HGCCBSUWB12M	HGCCBSUWB36M						
1-1/4"	.092"	Ring	_	HGCCBTUWB36M						
1-1/2"	.090"	Ring	HGCCCSUWB12M	_						
1-1/2"	.092"	Ring	_	HGCCCTUWB36M						
1-3/4"	.092"	Ring	HGCCDTUWB12M	HGCCDTUWB36M						
2"	.092"	Ring	HGCCFTUWB12M	HGCCFTUWB36M						
2-3/16"	.092"	Ring	HGCCITUWB12M	HGCCITUWB36M						
2-1/4"	.092"	Ring	_	HGCCHTUWB36M						
2-1/2"	.092"	Ring	_	HGCCKTUWB36M						
316 ST	AINLES	S STEEL								
2"	.092"	Smooth	_	HGCCFTVXB36M						
1-3/4"	.092"	Ring	_	HGCCDTVWB36M						
2"	.092"	Ring	_	HGCCFTVWB36M						
2-3/16"	.092"	Ring	_	HGCCITVWB36M						
2-1/2"	.092"	Ring	_	HGCCKTVWB36M						



Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.

### **Stainless Steel Coil Roofing Nails**



Length	Shank Diameter	Shank	Box 3,600 Piece	Box 7,200 Piece
304 ST	AINLES	S STEEL		
3/4"	.120"	Smooth	<del>_</del>	HGC34SSCRFG
1-1/4"	.120"	Smooth	HGC114SSCRFH	_
1-1/2"	.120"	Smooth	HGC112SSCRFH	HGC112SSCRFG
3/4"	.120"	Ring	HGC34SSRCRFH	_
7/8"	.120"	Ring	HGC78SSRCRFH	_
1"	.120"	Ring	HGC1SSRCRFH	_
1-1/4"	.120"	Ring	HGC114SSRCRFH	HGC114SSRCRFG
1-1/2"	.120"	Ring	HGC112SSRCRFH	HGC112SSRCRFG
1-3/4"	.120"	Ring	HGC134SSRCRFH	HGC134SSRCRFG





Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.

### **HUTTIG-GUARD**

# **HUTTIG-GUARD**<sup>™</sup> Stainless Steel Collated Staples



Limited Lifetime Fastener Warranty


Recommended for use **outdoors**, with **treated lumber**, and in other **high-corrosive environments**.







### **HOW TO READ THE ITEM NUMBER**

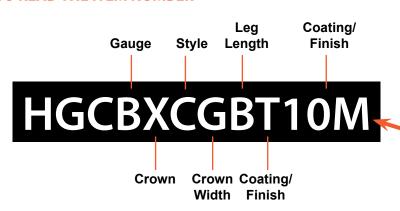



Gauge	Code	Crown	Code	Style	Code	Crown Width	Code	Leg Length	Code	Coating / Finish	Code	Piece	Code
18	Α	Narrow	W	"L"-Style	Α	7/32"	D	1/4"	Q	304 Stainless Steel	T	1,000	1M
16	В	Medium	Χ	"N"-Style	С	1/4"	Е	5/16"	Р	316 Stainless Steel	U	2,000	2M
20	D	Tacker	Z	"A11"-Style Tacker	L	3/8"	F	3/8"	0			2,500	25M
						7/16"	G	1/2"	N			3,000	3M
						1/2"	Н	9/16"	М			4,000	4M
						15/16"	1	5/8"	L			5,000	5M
						1"	J	3/4"	K			10,000	10M
								7/8"	J				
								1"	I				
								1-1/4"	F				
								1-3/8"	Ε				
								1-1/2"	D				
								1-3/4"	С				
								2"	В				
								2-1/4"	Α				

Product availability varies by location.

MEDIUM, NARROW CROWN & TACKER STAPLES



### **Stainless Steel** "N"-style Medium Crown Staple

Gauge	Crown	Leg	Box 10,000 Piece
304 S	TAINL	ESS ST	EEL
16	7/16"	1-1/4"	HGCBXCGFT10M
16	7/16"	1-1/2"	HGCBXCGDT10M
16	7/16"	1-3/4"	HGCBXCGCT10M
16	7/16"	2"	HGCBXCGBT10M

**HUTTIG-GUARD** 







### **Stainless Steel** "L"-style Narrow Crown Staple




Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master	
304 \$	STAINL	.ESS S	TEEL				
18	1/4"	1"	HGCAWAEIT5M	6	_	_	
18	1/4"	1-1/4"	HGCAWAEFT5M	6	HGCAWAEFT1M	5	
18	1/4"	1-1/2"	HGCAWAEDT5M	6	HGCAWAEDT1M	5	





### **Stainless Steel** "A11"-style Tacker Staple



Gauge	Gauge Crown		Box 5,000 Piece	Boxes / shipper
304 \$	STAINL	ESS S	TEEL	
20	1/4"	3/8"	HGCDZLFOT5M	6



Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.

# **HUTTIG-GUARD**<sup>™</sup> Stainless Steel Collated Finish & Trim Fasteners



Limited Lifetime Fastener Warranty

Recommended for use **outdoors**, with **treated lumber**, and in other **high-corrosive environments**.












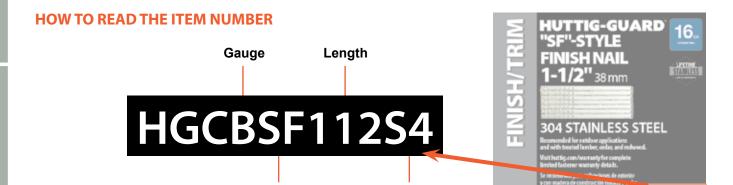

Coating/

Finish

	Gauge	Code	Style	Code	Length	Code	Coating / Finish	Code
	15	Α	"DA"-Style	DA	1/2"	12	304 Stainless Steel	S4
2	16	В	"FN"-Style	FN	9/16"	916	316 Stainless Steel	S6
D NA	18	С	"SF"-Style	SF	5/8"	58		
FINISH & BRAD NAILS			"AF"-Style	AF	3/4"	34		
ISH 8			Brad	BD	7/8"	78		
E					1"	1		
					1-1/8"	118		
					etc.			

Style

Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.



### **Stainless Steel** 15 gauge "DA"-style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 S	TAINLESS STE	EL		
1-1/2"	HGCADA112S4	2	HGCADA112S41M	5
2"	HGCADA2S4	2	HGCADA2S41M	5
2-1/2"	HGCADA212S4	2	HGCADA212S41M	5
316 S	TAINLESS STE	EL		
1-1/2"	HGCADA112S6	2	HGCADA112S61M	5
2"	HGCADA2S6	2	HGCADA2S61M	5
2-1/2"	HGCADA212S6	2	HGCADA212S61M	5





### **Stainless Steel** 15 gauge "FN"-style Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 S	TAINLESS STE	EL		
1-1/2"	HGCAFN112S4	2	HGCAFN112S41M	5
2"	HGCAFN2S4	2	HGCAFN2S41M	5
2-1/2"	HGCAFN212S4	2	HGCAFN212S41M	5
316 S	TAINLESS STE	EL		
1-1/2"	_	_	HGCAFN112S61M	5
2"	_	_	HGCAFN2S61M	5
2-1/2"	_	_	HGCAFN212S61M	5



Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.



### **Stainless Steel** 16 gauge Angled Finish Nail

Size	Box 4,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 S	TAINLESS STE	EL		
1-1/2"	HGCBAF112S4	6	HGCBAF112S41M	5
2"	HGCBAF2S4	6	HGCBAF2S41M	5
2-1/2"	HGCBAF212S4	6	HGCBAF212S41M	5
316 S	TAINLESS STE	EL		
2"	HGCBAF2S6	6	HGCBAF2S61M	5
2-1/2"	HGCBAF212S6	6	HGCBAF212S61M	5





### **Stainless Steel** 16 gauge Straight Finish Nail

Size	Box 2,500 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 S	TAINLESS STE	EL		
1-1/4"	HGCBSF114S4	6	_	_
1-1/2"	HGCBSF112S4	6	HGCBSF112S41M	5
2"	HGCBSF2S4	6	HGCBSF2S41M	5
2-1/2"	HGCBSF212S4	6	HGCBSF212S41M	5
316 S	TAINLESS STE	EL		
1-1/2"	HGCBSF112S6	6	HGCBSF112S61M	5
2"	HGCBSF2S6	6	HGCBSF2S61M	5
2-1/2"	HGCBSF212S6	6	HGCBSF212S61M	5







Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.

### **Stainless Steel** 18 gauge Brad Nail

Size	Box 5,000 Piece	Boxes / shipper	Clamshell 1,000 Piece	Clamshells / master
304 S	TAINLESS STEE	L		
3/4"	<del>_</del>	_	HGCCBD34S41M	5
1"	HGCCBD1S4	6	HGCCBD1S41M	5
1-1/4"	HGCCBD114S4	6	HGCCBD114S41M	5
1-1/2"	HGCCBD112S4	6	HGCCBD112S41M	5
2"	HGCCBD2S4	6	HGCCBD2S41M	5
316 S	TAINLESS STEE	L		
3/4"	HGCCBD34S6	6	_	_
1"	HGCCBD1S6	6	HGCCBD1S61M	5
1-1/4"	HGCCBD114S6	6	HGCCBD114S61M	5





Limited Lifetime Fastener Warranty. See www.huttig-grip.com/warranty for complete details.

# **HUTTIG-GRIP**\* & **HUTTIG-GUARD**\* Specialty Programs - Collated Tub














### **HOW TO READ THE ITEM NUMBER**

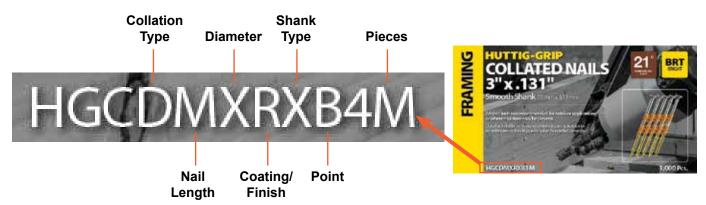

Collation Type	Code	Nail Length	Code	Shank Diameter	Code	Coating / Finish / Properties	Code	Shank Type	Code	Point	Code	Pieces	Code
15° Wire	С	1"	Α	.135"	0	HG Heat Treated	N	Ring	W	Standard	В	1,000	1M
21° Plastic	D	1-1/4"	В	.080"	Р	Bright High Carbon	0	Smooth	X	Blunt Chisel	С	2,000	2M
28° RH Wire	G	1-1/2"	С	.083"	Q	HG High Carbon	Р	Spiral	Y	Blunt Diamond	D		
30° CH Paper	ı	1-3/4"	D	.086"	R	Bright Heat Treated	Q	Screw	Z				
30° Paper Joist	J	1-7/8"	Е	.090"	S	Bright	R						
30° RH Paper	L	2"	F	.092"	Т	EG – Electro Galvanized	S						
		2-1/8"	G	.099"	U	HG – Hot Galvanized	Т						
		2-1/4"	Н	.113"	V	304 Stainless Steel	U						
		2-3/16"	ı	.120"	W	316 Stainless Steel	٧						
		2-3/8"	J	.131"	Х	OG – Outdoor Galvanized	W						
		2-1/2"	K	.148"	Υ								
		2-3/4"	L	.162"	Z								
		3"	М										
		3-1/4"	N										
		3-3/8"	0										
		3-1/2"	Р										

Product availability varies by location.

FRAMING, SIDING, JOIST HANGER NAILS

### **TUB PROGRAM**

- Convenient job pack quantity
- Contains & protects fasteners
- Clear plastic for fastener visibility
- Recloseable lid
- Easy to stack, easy to store





### 21° Plastic Strip Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece
BRIGH	Т		
2"	.113"	Smooth	HGCDFVRXB1M
2-1/4"	.148"	Smooth	HGCDHYRXB1M
2-3/8"	.113"	Smooth	HGCDJVRXB1M
2-3/8"	.148"	Smooth	HGCDJYRXB1M
2-1/2"	.131"	Smooth	HGCDKXRXB1M
2-1/2"	.148"	Smooth	HGCDKXRXB1M
3"	.120"	Smooth	HGCDMWTWB1M
3"	.131"	Smooth	HGCDMXRXB1M
3-1/4"	.131"	Smooth	HGCDNXRXB1M
3-1/4"	.148"	Smooth	HGCDNYRXB1M
3-1/4"	.162"	Smooth	HGCDNYRXB1M
HOT G	ALVANIZ	ZED	
2"	.113"	Smooth	HGCDFVTXB1M
2-1/4"	.148"	Smooth	HGCDHYTXB1M
2-3/8"	.113"	Smooth	HGCDJVTXB1M
2-3/8"	.148"	Smooth	HGCDJYTXB1M
2-1/2"	.131"	Smooth	HGCDKXTXB1M
3"	.131"	Smooth	HGCDMXTXB1M
3"	.148"	Smooth	HGCDMYTXB1M
3-1/4"	.120"	Smooth	HGCDNWTXB1M
3-1/4"	.131"	Smooth	HGCDNXTXB1M
3-1/4"	.148"	Smooth	HGCDNYTXB1M
3-1/2"	.131"	Smooth	HGCDPXTXB1M
2"	.113"	Ring	HGCDFVTWB1M
2-3/8"	.113"	Ring	HGCDJVTWB1M
3"	.120"	Ring	HGCDMWTWB1M
3"	.131"	Ring	HGCDMXTWB1M
3"	.120"	Screw	HGCDMWTZB1M
OUTDO	OR GAL	VANIZI	ED
2-1/2"	.131"	Smooth	HGCDKXWXB1M
3"	.131"	Smooth	HGCDMXWXB1M
3-1/4"	.131"	Smooth	HGCDNXWXB1M
2"	.113"	Ring	HGCDFVWWB1M
3"	.120"	Ring	HGCDMWWWB1M
3-1/4"	.131"	Ring	HGCDNXWWB1M
	AINLES		
2-1/2"	.131"	Smooth	HGCDKXWXB1M
3"	.131"	Smooth	HGCDMXWXB1M
3-1/4"	.131"	Smooth	HGCDNXWXB1M
2"	.113"	Ring	HGCDFVWWB1M
3"	.120"	Ring	HGCDMWWWB1M
3-1/4"	.131"	Ring	HGCDNXWWB1M









### 28° Wire Weld Offset Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece	DDT
BRIGHT	г			BRT
3-1/4"	.131"	Smooth	HGCGNXRXB1M	Dillorii
3-1/2"	.131"	Smooth	HGCGPXRXB1M	
2-3/8"	.113"	Ring	HGCGJVRWB1M	ШС
HOT G	ALVANIZ	ZED		HG
<b>HOT G</b> / <sub>4</sub> 2-3/8"	.120"	ZED Ring	HGCGJWTWB1M	HOT
2-3/8"	.120"			HOT GALVANIZE
2-3/8"	.120"	Ring		HOT GALVANIZE OG OUTDOOR
2-3/8" OUTDO	.120" OR GAL	Ring VANIZE	D	HOT GALVANIZE

## 30° 3

### 30° Paper Tape Clipped Head

_				
	Tub 1,000 Piece	Shank	Shank Diameter	Length
BR1			г	BRIGHT
BRIGHT	HGCIFVRXB1M	Smooth	.113"	2"
	HGCIJVRXB1M	Smooth	.120"	2-3/8"
	HGCIMWRXB1M	Smooth	.120"	3"
	HGCIMXRXB1M	Smooth	.131"	3"
	HGCINWRXB1M	Smooth	.120"	3-1/4"
	HGCINXRXB1M	Smooth	.131"	3-1/4"
	HGCIJVRWB1M	Ring	.113"	2-3/8"
HG		ZED	LVANIZ	HOT G
HOT GALVANIZ	HGCIFVTWB1M	Ring	.113"	2"
GALVAINIZ	HGCIJVTWB1M	Ring	.113"	2-3/8"
	HGCIMWTWB1M	Ring	.120"	3"



### 30° Paper Tape Offset Round Head

Length	Shank Diameter	Shank	Tub 1,000 Piece					
BRIGH	BRIGHT							
3"	.120"	Smooth	HGCLMWRXB1M					
3"	.131"	Smooth	HGCLMXRXB1M					
2-3/8"	.113"	Ring	HGCLJVRWB1M					
HOT G	ALVANIZ	ZED						
3-1/4"	.131"	Smooth	HGCLNXTXB1M					
2-3/8"	.113"	Ring	HGCLJVTWB1M					
3"	.120"	Ring	HGCLMWTWB1M					





### 30° Paper Tape **Joist Hanger Nail**

Length	Shank Diameter	Shank	Tub 1,000 Piece						
BRIGH1	BRIGHT								
1-1/2"	.131"	Smooth	HGCJCXRXB1M						
1-1/2"	.148"	Smooth	HGCJKXRXB1M						
2-1/2"	.131"	Smooth	HGCJCYRXB1M						
2-1/2"	.148"	Smooth	HGCJKYRXB1M						
2-1/2"	.162"	Smooth	HGCJKZRXB1M						
HOT GA	LVANIZ	ZED - HA	RDENED						
1-1/2"	.131"	Smooth	HGCJCXTXB1M						
1-1/2"	.148"	Smooth	HGCJCYTXB1M						
2-1/2"	.148"	Smooth	HGCJKYTXB1M						





### **Coil Roofing Nails**

Length	Shank Diameter	Shank	Tub 840 Piece
ELECTI	RO GAL	VANIZED	
7/8"	.120"	Smooth	HGC78EGCRFGT
1"	.120"	Smooth	HGC1EGCRFGT
1-1/4"	.120"	Smooth	HGC114EGCRFGT
1-1/2"	.120"	Smooth	HGC112EGCRFGT
1-3/4"	.120"	Smooth	HGC134EGCRFGT





### 15° Wire Coil -**Siding/Fence**

Length	Shank Diameter	Shank	Tub 1,200 Piece					
HOT GALVANIZED								
2-3/16"	.092"	Smooth	HGCCITTXB12M					
1-3/4"	.092"	Ring	HGCCDTTWB12M					
2"	.092"	Ring	HGCCFTTWB12M					
2-3/16"	.092"	Ring	HGCCITTWB12M					
304 ST	AINLES	S STEEL						
1-1/4"	.090"	Ring	HGCCBSUWB12M					
1-1/2"	.090"	Ring	HGCCCSUWB12M					
1-3/4"	.092"	Ring	HGCCDTUWB12M					
2"	.092"	Ring	HGCCFTUWB12M					
2-3/16"	.092"	Ring	HGCCITUWB12M					
			1					





### **HUTTIG-GRIP** & **HUTTIG-GUARD Collated Finish & Trim Box Program**
































### **HOW TO READ THE ITEM NUMBER**

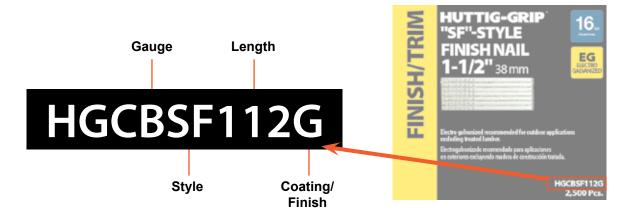

	Gauge	Code	Style	Code	Length	Code	Coating / Finish	Code
	15	Α	"DA"-Style	DA	1/2"	12	Bright	В
IIS	16	В	"FN"-Style	FN	9/16"	916	EG – Electro Galvanized	G
DNA	18	С	"SF"-Style	SF	5/8"	58	304 Stainless Steel	S4
BRA	20	D	"AF"-Style	AF	3/4"	34	316 Stainless Steel	S6
FINISH & BRAD NAILS	23	Е	Brad	BD	7/8"	78		
E			Pin	PN	1"	1		
			Cleat	CL	1-1/8"	118		
					etc.			

### **FINISH & TRIM BOX PROGRAM**





### 15 gauge "FN"-Style **Angled Finish Nail**

Size	Box 3,650 Piece	Boxes / shipper
ELEC	TRO GALVANIZE	ĒD
1-1/4"	HGCAFN114G	4
1-1/2"	HGCAFN112G	4
1-3/4"	HGCAFN134G	4
2"	HGCAFN2G	4
2-1/2"	HGCAFN212G	2
304 S	TANLESS STEE	L
1-1/2"	HGCAFN112S4	2
1-3/4"	HGCAFN2S4	2
2"	HGCAFN212S4	2





### 16 gauge **Angled Finish Nail**

Size	Box 2,000 Piece	Boxes / shipper								
ELEC.	ELECTRO GALVANIZED									
1"	HGCBAF1G	10								
1-1/4"	HGCBAF114G	10								
1-1/2"	HGCBAF112G	10								
1-3/4"	HGCBAF134G	10								
2"	HGCBAF2G	10								
2-1/2"	HGCBAF212G	8								
304 S	TANLESS STEE	L								
1-1/2"	HGCBAF112S4	6								
2"	HGCBAF2S4	6								
2-1/2"	HGCBAF212S4	6								
316 S	TANLESS STEE	L								
2"	HGCBAF2S6	6								
2-1/2"	HGCBAF212S6	6								



EG ELECTRO GALVANIZED



### 15 gauge "DA"-Style **Angled Finish Nail**

Size	Box 4,000 Piece	Boxes / shipper							
ELECTRO GALVANIZED									
1-1/4"	HGCADA114G	4							
1-1/2"	HGCADA112G	4							
1-3/4"	HGCADA134G	4							
2"	HGCADA2G	4							
2-1/4"	HGCADA214G	4							
2-1/2"	HGCADA212G	2							
304 S	TANLESS STEE	_							
1-1/2"	HGCADA112S4	2							
2"	HGCADA2S4	2							
2-1/2"	HGCADA212S4	2							
316 S	TANLESS STEE	_							
1-1/2"	HGCADA112S6	2							
2"	HGCADA2S6	2							
2-1/2"	HGCADA212S6	2							







### 16 gauge **Straight Finish Nail**

Size	Box 2,500 Piece	Boxes / shipper						
ELEC	TRO GALVANIZI	ĒD						
3/4"	HGCBSF34G	10						
7/8"	HGCBSF78G	10						
1"	HGCBSF1G	10						
1-1/8"	HGCBSF118G	10						
1-1/4"	HGCBSF114G	10						
1-1/2"	HGCBSF112G	10						
1-3/4"	HGCBSF134G	10						
2"	HGCBSF2G	10						
2-1/4"	HGCBSF214G	8						
2-1/2"	HGCBSF212G	8						
304 STANLESS STEEL								
1-1/4"	HGCBSF114S4	6						
1-1/2"	HGCBSF112S4	6						
2"	HGCBSF2S4	6						
2-1/2"	HGCBSF212S4	6						
316 S	TANLESS STEE	L						
1-1/2"	HGCBSF112S6	6						
2"	HGCBSF2S6	6						
2-1/2"	HGCBSF212S6	6						





### 18 gauge **Brad Nail**

Size	Box 2,500 Piece	Boxes / shipper						
ELECTRO GALVANIZED								
5/8"	HGCCBD58G	10						
3/4"	HGCCBD34G	10						
1"	HGCCBD1G	10						
1-1/8"	HGCCBD118G	10						
1-1/4"	HGCCBD114G	10						
1-1/2"	HGCCBD112G	10						
1-3/4"	HGCCBD134G	10						
2"	HGCCBD2G	10						
304 S	TANLESS STEE	L						
1"	HGCCBD1S4	6						
1-1/4"	HGCCBD114S4	6						
1-1/2"	HGCCBD112S4	6						
2"	HGCCBD2S4	6						
316 S	TANLESS STEE	L						
3/4"	HGCCBD34S6	6						
1"	HGCCBD1S6	6						
1-1/4"	HGCCBD114S6	6						







### 18 gauge "L"-style **Narrow Crown Staple**

Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper					
ELEC	ELECTRO GALVANIZED								
18	1/4"	5/8"	HGCAWAELR5M	6					
18	1/4"	3/4"	HGCAWAEKR5M	6					
18	1/4"	7/8"	HGCAWAEJR5M	6					
18	1/4"	1"	HGCAWAEIR5M	6					
18	1/4"	1-1/8"	HGCAWAEHR5M	6					
18	1/4"	1-1/4"	HGCAWAEFR5M	6					
18	1/4"	1-1/2"	HGCAWAEDR5M	6					
304 S	TANLE	SS STI	EEL						
18	1/4"	1"	HGCAWAEIT5M	6					
18	1/4"	1-1/4"	HGCAWAEFT5M	6					
18	1/4"	1-1/2"	HGCAWAEDT5M	6					







### 18 gauge "SX"-style **Narrow Crown Staple**

Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper			
ELECTRO GALVANIZED							
18	7/32"	1-1/2"	HGCAWBDDR5M	6			



### "A11"-Style **Tacker Staple**

Crown	Leg	Box 5,000 Piece	Boxes / shipper			
ELECTRO GALVANIZED						
3/8"	3/8"	HGCDZLFOR5M	20			
304 STAINLESS STEEL						
1/4"	3/8"	HGCDZLFOT5M	6			
	TRO GA 3/8" TAINLI	TRO GALVAN 3/8" 3/8" TAINLESS ST	Crown Leg 5,000 Piece TRO GALVANIZED  3/8" 3/8" HGCDZLFOR5M TAINLESS STEEL			





### "A19"- Style **Tacker Staple**

Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper			
ELECTRO GALVANIZED							
23	3/8"	1/4"	HGCEZOFQR5M	20			





### "50"- Style **Tacker Staple**

Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper					
ELEC	ELECTRO GALVANIZED								
20	1/2"	5/16"	HGCDZNHPR5M	20					
20	1/2"	3/8"	HGCDZNHOR5M	20					





### "SHCR"- Style **Tacker Staple**

Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper				
ELECTRO GALVANIZED								
20	3/8"	1/4"	HGCDZQFQR5M	20				
20	3/8"	3/8"	HGCDZQFOR5M	20				





### "STCR"- Style **Tacker Staple**

Gauge	Crown	Leg	Box 5,000 Piece	Boxes / shipper				
ELECTRO GALVANIZED								
20	1/4"	7/16"	HGCDZPGQR5M	20				
20	3/8"	7/16"	HGCDZPGOR5M	20				



# **HUTTIG-GRIP** & **HUTTIG-GUARD** Collated Finish & Trim Clamshell Program






























**HOW TO READ THE ITEM NUMBER** 

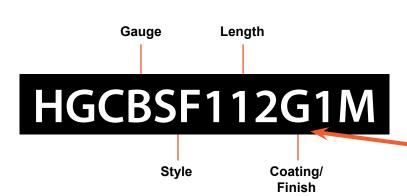



	Gauge	Code	Style	Code	Length	Code	Coating / Finish	Code
	15	Α	"DA"-Style	DA	1/2"	12	Bright	В
ES	16	В	"FN"-Style	FN	9/16"	916	EG – Electro Galvanized	G
D NA	18	С	"SF"-Style	SF	5/8"	58	304 Stainless Steel	S4
FINISH & BRAD NAILS	20	D	"AF"-Style	AF	3/4"	34	316 Stainless Steel	S6
ISH 8	23	Е	Brad	BD	7/8"	78		
E			Pin	PN	1"	1		
			Cleat	CL	1-1/8"	118		
					etc.			

# FINISH & TRIM CLAMSHELL PROGRAM

- See-through clamshell for high product visibility
- Easy open/close polypropylene plastic with performance gains in temperatures from 32°-150°F
- Foam inserts across entire line keep clamshells intact and upright inside easy-tear master cartons
- Clamshells designed to also be hung from peg hook



Product availability varies by location.



### 15 gauge "DA"-Style Angled Finish Nail

Size	Clamshell 1,000 Piece	Clamshells / master	
ELEC.	TRO GALVANIZE	ĒD	
1-1/4"	HGCADA114G1M	5	
1-1/2"	HGCADA112G1M	5	
1-3/4"	HGCADA134G1M	5	
2"	HGCADA2G1M	5	
2-1/2"	HGCADA212G1M	5	
304 S	TANLESS STEE	1	
1-1/2"	HGCADA112S41M	5	
2"	HGCADA2S41M	5	
2-1/2"	HGCADA212S41M	5	
316 S	TANLESS STEE	L	
1-1/2"	HGCADA112S61M	5	
2"	HGCADA2S61M	5	
2-1/2"	HGCADA212S61M	5	







### 16 gauge Angled Finish Nail


Size	Clamshell 1,000 Piece	Clamshells / master
ELEC.	TRO GALVANIZE	ĒD
1-1/2"	HGCBAF112G1M	5
2"	HGCBAF2G1M	5
2-1/2"	HGCBAF212G1M	5
304 S	TANLESS STEE	L
1-1/2"	HGCBAF112S41M	5
2"	HGCBAF2S41M	5
2-1/2"	HGCBAF212S41M	5
316 S	TANLESS STEE	L
2"	HGCBAF2S61M	5
2-1/2"	HGCBAF212S61M	5







### 16 gauge Straight Finish Nail







## 15 gauge "FN"-Style Angled Finish Nail

Size	Clamshell 1,000 Piece	Clamshells / master	
ELEC.	TRO GALVANIZE	ĒD	
1-1/4"	HGCAFN114G1M	5	
1-1/2"	HGCAFN112G1M	5	
1-3/4"	HGCAFN134G1M	5	
2"	HGCAFN2G1M	5	
2-1/2"	HGCAFN212G1M	5	
304 S	TANLESS STEE	1	
1-1/2"	HGCAFN112S41M	5	
2"	HGCAFN2S41M	5	
2-1/2"	HGCAFN212S41M	5	
316 S	TANLESS STEE		
1-1/2"	HGCAFN112S61M	5	
2"	HGCAFN2S61M	5	
2-1/2"	HGCAFN212S61M	5	



EG

GALVANIZED

Product availability varies by location.

### 18 gauge **Brad Nail**

EG

ELECTRO GALVANIZED

Size	Clamshell Clamshells 1,000 Piece master	
ELEC'	TRO GALVANIZE	ĒD
5/8"	HGCCBD58G1M	5
3/4"	HGCCBD34G1M	5
1"	HGCCBD1G1M	5
1-1/8"	HGCCBD118G1M	5
1-3/16"	HGCCBD1316G1M	5
1-1/4"	HGCCBD114G1M	5
1-1/2"	HGCCBD112G1M	5
1-3/4"	HGCCBD134G1M	5
2"	HGCCBD2G1M	5
304 S	TANLESS STEE	L
3/4"	HGCCBD34S41M	5
1"	HGCCBD1S41M	5
1-1/4"	HGCCBD114S41M	5
1-1/2"	HGCCBD112S41M	5
2"	HGCCBD2S41M	5
316 S	TANLESS STEE	L
1"	HGCCBD1S61M	5
1-1/4"	HGCCBD114S61M	5



### 23 gauge **Pin Nail**

Size	Clamshell 1,000 Piece	Clamshells / master	
ELEC.	TRO GALVANIZE	ĒD	
1/2"	HGCEPN12G2M	10	
5/8"	HGCEPN58G2M	10	
3/4"	HGCEPN34G2M	10	
1"	HGCEPN1G2M	10	
1-3/16"	HGCEPN1316G2M	10	





### 16 gauge "L"-Style Flooring Cleat

Size	Clamshell 1,000 Piece	Clamshells / master
ELEC	TRO GALVANIZE	ĒD
1-1/2"	HGCBCL112G	5
2"	HGCBCL2G	5





### 18 gauge "L"-style **Narrow Crown Staple**

Gauge	Leg	Crown	Clamshell 1,000 Piece	Boxes / shipper	
ELEC	TRO G	ALVAN	IZED		
18	5/8"	1/4"	HGCAWAELR1M	5	
18	3/4"	1/4"	HGCAWAEKR1M	5	
18	7/8"	1/4"	HGCAWAEJR1M	5	
18	1"	1/4"	HGCAWAEIR1M	5	
18	1-1/8"	1/4"	HGCAWAEHR1M	5	
18	1-1/4"	1/4"	HGCAWAEFR1M	5	
18	1-1/2"	1/4"	HGCAWAEDR1M	10	
304 S	304 STANLESS STEEL				
18	1-1/4"	1/4"	HGCAWAEFT1M	5	
18	1-1/2"	1/4"	HGCAWAEDT1M	5	




Product availability varies by location.

# **Reference Materials**

Penny Nail Chart	142
Finish Icons & Explanations	
Huttig-Guard Outdoor Screw Comparion	145
Common Construction Screw Attributes	
Collated Fastener / Tool Compatibility Guide	
Huttig-Guard Warranty	

 $WARNING: Cancer\ and\ Reproductive\ Harm-www.P65Warnings.ca.gov$ ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov

Product availability varies by location.

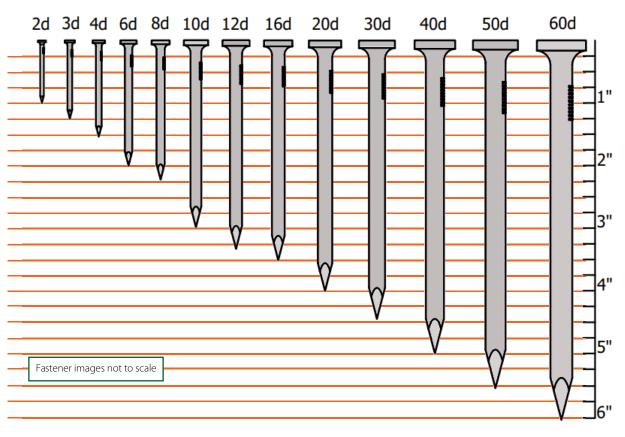

Penny Size L	en	gth
2 d	1″	25.4 mm
3d	1-1/4"	31.7 mm
4d	1-1/2"	38.1 mm
5d	1-3/4"	44.4 mm
6 d	2″	50.8 mm
7 d	2-1/4"	57.1 mm
8d	2-1/2"	63.5 mm
9d	2-3/4"	69.8 mm
10d 3	"	76.2 mm
12d	3-1/4"	82.5 mm
16d 3	-1/2"	88.9 mm
20d 4	"	10.1 cm
30d 4	-1/2"	11.4 cm
40d 5	"	12.7 cm
50d 5	-1/2"	13.9 cm
60d 6	"	15.2 cm
70d 7	"	17.7 cm

### **PENNY SIZE**

The symbol "d" or "D" is used to identify the size of many types of nails. For example, a 3" box nail is also known as a 10 penny (10d) box nail.

### History

The denarius was a coin used as currency by the Romans throughout their empire. In Britain, over time, the Roman denarius transitioned to the British penny, with "d/D" (for denarius) living on as the abbreviation for "penny".

Nails were once identified by how many pennies it would cost to purchase 100 nails of that size from a blacksmith. 100 of a smaller nail (4d) would cost less than 100 of a larger nail (16d) and vice versa.

Today, we also identify nails with specific length and gauge, but the term "penny" and "d/D" symbol are still commonly used.

Penny size is typically used used for construction nails longer than 2 in.

#### FINISH ICONS & EXPLANATIONS **FINISH INFORMATION RECOMMENDATIONS DESCRIPTION** Plain, "bright" steel without any Not recommended for outdoor **Bright** additional protection against applications or where moisture corrosion. may be present. **BRT BRT** Blued Exposed to heat for Most commonly used on lath or Not recommended for outdoor other relatively small nails, which "sterilization", which creates applications or where moisture at one time were often held in the blue appearance. may be present. BL the mouth prior to nailing. BLUED Vinyl Coated Nail dipped in vinyl; vinyl heats Not recommended for outdoor Vinyl coating does not provide as nail is driven into wood for protection against corrosion. applications or where moisture easier driving, provides nominal may be present. enhanced holding power when COATED cools. **Phosphate Coated** Iron phosphate coating created Not recommended for outdoor Phosphate coating provides on the surface of the fastener to minimal protection against applications or where moisture enhance adhesion of paint and corrosion. may be present. PC other finishes (drywall com-PHOSPHATE COATED COATED pound). Zinc Plated / Clear or yellow zinc coating Zinc plating provides minimal Not recommended for outdoor applied to fastener; smooth, protection against corrosion. applications or where moisture Yellow Zinc Plated shiny finish. may be present. YZ ZP ZINC Recommended for outdoor Electro Galvanized Zinc plating bonded to steel with Electro galvanization provides electrical charges; smooth, shiny moderate protection against applications excluding treated finish. lumber. corrosion. EG EG ELECTRO GALVANIZED ELECTRO GALVANIZED Hot Galvanized Recommended for outdoor Hot zinc applied to fastener for Hot galvanization provides thicker, more durable coating; significant protection against applications and with treated rougher, sometimes darker lumber. corrosion. finish. **Outdoor Galvanized** Multi-step process; zinc applied Outdoor galvanization provides Recommended for outdoor to fastener followed by a variety significant protection against applications and with treated corrosion, equal to or better than lumber. of methods to harden the coat-OG ing for additional protection. hot galvanization. Not recommended for use with Copper Copper is anti-corrosive by Commonly used with roofing nature; known for durability and tiles and slates, copper roofs and aluminum flashing or other longevity. Develops attractive gutters; can also be used with aluminum materials due to Cu patina with age. treated lumber. corrosive reaction. **COPPER** Aluminum / Not recommended for use with Inherently resistant to corrosion, Used with aluminum flashing, lighter than comparable steel gutters, siding, and screening. treated lumber or copper flash-Painted Aluminum nails. ing due to corrosive reaction. ΑI

		FINISH ICONS & EXPLANATIONS
FINISH	2 Committee of the control of the co	RECOMMENDATIONS
Premium Limited 50 Year Warranty PREMIUM PREMIUM	Limited 50 year fastener warranty.	Recommended for outdoor applications and with treated lumber.
Platinum Limited Lifetime Warranty  PLATINUM  PLATINUM	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber.
Stainless Steel 304 Limited Lifetime Warranty  STAINLESS  IMPROVIDENTIAL STAINLESS  IMPROVIDENTI	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, and redwood.
Stainless Steel 305 Limited Lifetime Warranty  LIFETIME  STAINLESS  IMPROVIMENTATION	Limited lifetime fastener warranty.	Recommended for outdoor applications and with treated lumber, cedar, and redwood.
Stainless Steel 316	Limited lifetime fastener	Recommended for outdoor applications and with treated lumber,

cedar, redwood, and marine

Limited Lifetime Warranty

warranty.

## **HUTTIG-GUARD OUTDOOR SCREW COMPARISON**







	HEAD	COUNTERSINK FLAT HEAD WITH NIBS	DOUBLE COUNTERSINK FLAT HEAD WITH NIBS	COUNTERSINK FLAT HEAD WITH NIBS
OUTDOOR SCREWS	POINT	TYPE 17 POINT	TYPE 17 LONG POINT	TYPE 17 POINT
DOR S	SHANK		KNURLED SHANK	
OUTD	DRIVE	STAR DRIVE	STAR DRIVE	STAR DRIVE
	THREAD	COARSE	COARSE SERRATED THREAD	COARSE SERRATED THREAD
	HEAD	TRIM HEAD WITH NIBS	TRIM HEAD WITH NIBS	
SW:	POINT	TYPE 17 POINT	TYPE 17 LONG POINT	
TRIM SCREWS	SHANK		KNURLED SHANK	
TRIN	DRIVE	STAR DRIVE	STAR DRIVE	
	THREAD	COARSE	COARSE SERRATED THREAD	
¥	HEAD			MUSHROOM HEAD
TE DEC	POINT			TYPE 17 POINT
COMPOSITE	DRIVE			STAR DRIVE
00	THREAD			TRIPLE THREAD

1 / 5

### COMMON CONSTRUCTION SCREW ATTRIBUTES

### **DRIVE**



#### **PHILLIPS DRIVE**



#### **SQUARE DRIVE**



### **STAR DRIVE**



**SLOT DRIVE** 

Cross-shaped recess designed to cam-out (bit slips out of the drive) before being overdriven, preventing screws breaking from too much torque.

Bit fits into screw head, less likely to slip out. Screw stays on the bit, easier for one-handed fastening.

"Positive" drive; keeps driving tool in place, even with high torque. Eliminates head spinouts.

Most basic drive style. Not recommended for use with power toools or with high torque.

### **HEAD**



#### **BUGLE HEAD**



#### COUNTERSINK FLAT HEAD



#### **COUNTERSINK FLAT HEAD WITH NIBS**



#### **DOUBLE** COUNTERSINK FLAT **HEAD WITH NIBS**

Used with drywall and softer woods where head can sink just below surface, holding material beneath. Rounded edges, sloping neck prevent tearing of material.

Used with wood, cement board, and other similar materials. Flat head sits flush.

Used with wood, cement board, and other similar materials. Flat head sits flush. Nibs help to pull material from the hole, and to "seat" the head for smoother finished surface.

Used with wood, cement board, and other similar materials. Double countersink flat head sits flush without pre-drilling hole. Twice as many nibs to help to pull material from the hole, and to "seat" the head for smoother finished surface.



#### **TRIM HEAD**



#### TRIM HEAD WITH NIBS



### **PAN HEAD**



#### MUSHROOM HEAD

Relatively small head, roughly same size as finish nail head. Sinks beneath the surface for low visibility.

and/or minimized appearance.


Relatively small head, roughly same size as finish nail head. Sinks beneath the surface for low visibility. Nibs help to "seat" the head into the hole.

For high-torque installations into wood or metal. Lower profile than oval or round screws, with a flat or slightly rounded top and vertical edges.

Common on screws used with composite lumber. Head not much larger than shank; designed to sink into the hole, trapping material beneath.



### **MODIFIED TRUSS / WASHER HEAD**






### **WAFER HEAD**

Used with wood, cement board, and other similar materials. Flat, wider head sits flush while providing expanded bearing surface.







### **HEX HEAD WITH NEOPRENE WASHER**



#### **HEX WASHER HEAD**



### SLOTTED HEX WASHER HEAD

Benefits of hex washer head, plus can also be driven with a standard/flatblade screwdriver or bit.

Benefits of hex head, plus neoprene-bonded washer provides seal against moisture.

### **THREAD**



### **COARSE THREAD**

high-volume projects; relatively easy

to engage, tighten, and loosen,

supports more tightening torque than other head styles. Metal flange at base of head provides pull-through resistance.



**HIGH-LOW THREAD** 



#### **TRIPLE THREAD**



Used with wood, cement board, Used with low-density materials such and other similar materials. Coarse as cement board. Thread design thread accepts more material reduces the amount of required between threads and is forgiving; torque, reduces cracking, and has more likely to drill and hold even if greater pull-out restistance. slightly dinged or otherwise blemished.

Common on screws used with c omposite lumber. Traps material within the hole, away from the surface. Useful with softer materials including composites and vinyl.

Used with attaching to steel and other metals and thin pieces of wood. Threads are finer, closer together, more precise; necessary when working with thinner and/ or more brittle materials. Greater holding power compared to coarse thread.

**FINE THREAD** 

### **POINT**



### **SHARP POINT**



### **TYPE 17 POINT**



#### **SELF-DRILL POINT**



#### **SPADE POINT**

Used when fastening to wood and other medium to soft materials. May require drilling of pilot point.

Used when fastening to wood, especially denser, harder woods. Flute in point helps to draw material out of the hole.

Used when fastening to steel, other types of metal, and thin pieces of wood. Drills own pilot point into medium to heavy steel.

Used to quickly bore holes through wood and similar materials.

www.huttig-grip.com

146

This information is intended to be used as a guide and only as a guide; the tool manufacturer should always be consulted for details regarding what type and size fasteners are appropriate for their tools. Tool manufacturer specifications would override information contained in this guide.

**Tool Brand** Tool Model



### 15° Coil Roofing Nail

Bostitch	RN46-1	RN45B	RN46	RN45	RN45B-1	N12-1
DeWalt	DWF83PL	DCN45RNB	D51321			
Duo-Fast	DFCR175C	DRN-45	RN-175	RN-175A		
Makita	AN454	AN453	AN451			
MAX	CN445R3	CN12R	CN445R	CN445R2	CN450R	
Metabo/Hitachi	NV45AB2	NV45AE	NV45AB	NV45AC		
Paslode	R175-C	3175-RCU	3175/44 RCU	CR175C		
Pneu Tools	CN45R					
Porter-Cable	RN175B	RN175C	RN175A	RN175	134R	
Ridgid	R175RNF	R175RNE				
Senco	RoofPro 455XP	SCN200R	SCN40R	RoofPro 450		

### 0° Plastic Coil Siding Nail

Paslode	DF225C			
Pneu Tools	CN65Z	CN32		

### 15° Plastic Coil Siding Nail

Paslode	4250-65C	4250-65CP	F3250C/HSF	3225/CN55	
Senco	SCN55S	SCN56	SCN48	SCN60DXP	

### 15° Coil Nail Wire Weld

Bostitch	BTF83C	N89C-1	N80CB-1	N66C-1	N50C	N55CP
DeWalt	DW325C					
Duo-Fast	CNW-75	DCN-325-85L				
MAX	CN890F2	CN665D				
Makita	AN902	AN621				
Metabo/Hitachi	NV90AG(S)	NV83A5	NV65AN	NV50A2	NV83A	NV65AB
Paslode	5300C/75S	F325C/P325C	F275C/P275C	4275/CN70	P350C/CNW90	5325/CN80
Porter-Cable	COIL200	COIL250	COIL350			
Pneu Tools	CN90F	CN6650	CN57	CN64	CN70	CN83
Senco	SCN60XP	SCN65XP	SCN49	SCN45	SCN55	SCN56

### 15° Plastic Coil Siding Nail & 15° Coil Nail Wire Weld

Bostitch	N55	N64C	N64CP	N75C-1	N75C	N63CP
DeWalt	DW66C-1					
Makita	AN611	AN613	AN635H			
MAX	HN65	HN65S	CN565S3	CN550S	HN90F	CN565S2
Metabo/Hitachi	NV75A5	NV65AH2	NV75AN	NV65AH	NV75AG	NV50AG
Pneu Tools	CN65S	CN65SP	CN65S-3	CN38	CN50	CN75
Senco	SN71P1					

Huttiq-Grip™ is a trademark of Woodgrain. Other product and company names listed may be trademarks of their respective owners. Woodgrain is not affiliated with the other products and companies listed.

This information is intended to be used as a guide and only as a guide; the tool manufacturer should always be consulted for details regarding what type and size fasteners are appropriate for their tools. Tool manufacturer specifications would override information contained in this guide.

**Tool Brand Tool Model** 



### 21° Plastic Strip Round Head

Bostitch	BTF83PL	F21PL	F21PL2	LPF21PL	N79RH	N88RH
DeWalt	DWF83PL	DCN21PLB	D51844	D51845	DW325PL	
Duo-Fast	DF350S	CN-137	CN-350	CN-350B	SNP-83	
Makita	AN924	AN923	AN8300	AN922		
MAX	SN883RH3	HS130	GS683RH-EX	SN80	SN883RH2	SN890RH
Metabo/Hitachi	NR1890DR	NR83A5	NR90AE	NR90AC5	NR90GR2	NR90AE(S1)
Paslode	F350-21	5325 SRH-20	5350 SRH-20	5300		
Pneu Tools	SN2283H	SN2290	SN2290B			
Porter-Cable	FR350B	FR350 Mag	FR350A			FR350NC
Ridgid	R350RHF	RN350RHE	R350RHA			
Senco	F-35FRHXP	FramePro 325FRHXP	FramePro 752XP	FramePro 702XP	SN60	SN65

### 28° Wire Weld

Bostitch	BTF83WW	LPF28WW	BCF28WW	F28WW	GF28WW	N79WW
Duo-Fast	DWF83WW					
MAX	SN883CH2/28	SN883CH/28	SN890CH/28			
Metabo/Hitachi	NR90AF(S1)	NR90AF	NR90AF(S)			
Pneu Tools	SN2890					
Porter-Cable	FM350A	FM350				

### 30° Paper Tape

Bostitch	BTF83PT	BCF30PT	LPF33PT	F33PT	GF33PT	N90PT
DeWalt	DWF83PT	DCN692	D51822	D51823	DCN692B	DW325PT
Makita	AN942	AN943				
MAX	SN890CH3/34	GS683CH-EX	SN883CH/34	SN890CH2/34		
Metabo/Hitachi	NR1890DC	NR90AD(S1)	NR83AA5	NR1890DR	NR83AA	NR83AA2
Paslode	PF350	F350-S	F325R	CF325XP	F350-P	5300
Pneu Tools	SN3483H	SN3490				
Porter-Cable	FC350B	FC350A	FC350			
Ridgid	R350CHE	R350CHA				FramePro 751XP
Senco	FN91T1	F-35XP	FramePro 751XP	FramePro 701XP	FramePro 325XP	



### 30° Paper Tape Joist Hanger Nail

Bostitch	MCN150	MCN250	F33PT			
DeWalt	DWMC150					
MAX	SN438J	HN65J2				
Metabo/Hitachi	NR83AK	NR65AK2	NR65AK2(S)	NR65AK		
Paslode	PF150S-PP	F250S-PP	5250/65S-PP			
Pneu Tools	RN150	RN250	MC150	RNS150-II	RNS250	
Senco	JN91H2	JN91H1	JOISTPRO 250MXP	JoistPro 250XP	HN150	HN150

Huttiq-Grip™ is a trademark of Woodgrain. Other product and company names listed may be trademarks of their respective owners. Woodgrain is not affiliated with the other products and companies listed.

This information is intended to be used as a guide and only as a guide; the tool manufacturer should always be consulted for details regarding what type and size fasteners are appropriate for their tools. Tool manufacturer specifications would override information contained in this guide.

	Tool Brand	Tool Model									
<b>3</b> <sub>GA</sub>	16 gauge "BCS"-style Wide Crown Staple										
PLE CTVI E	Bostitch	450S2-1	438S2-1	438S4-1	438S2R	438S2	450S2				

"GSW"-STYLE

### 16 gauge "GSW"-style Wide Crown Staple

Metabo/Hitachi	N5021A				
Paslode	WCS200	3150-W16	MU-112-W16R	S200-W16R	

### 16 gauge "P"-style Wide Crown Staple

DeWalt	DW451S2					
<b>Duo-Fast</b>	KW-1748	KWR-1748	RNS-1748	RS-1748	SW-1748	
Makita	AT2550A					
Metabo/Hitachi	N5024A2	N3824A	N5024A			
Porter-Cable	NS100	NS100A	NS150	NS150B		
Senco	MW	MWXP	PW	PW150	PW150R	PW200

### 16 gauge "76"-style Medium Crown Staple

ı	Bostitch	G50S5-1	S4				
	Duo-Fast	MS-7664E	DS-7656P	SM-7648	SM-7664	DS-7664E	KS-7648
	Makita	AT1150A					
	MAX	TA551/76					

### 16 gauge "BCS"-style Medium Crown Staple

Bostitch	650S4-1	438S4-1	650S4	438S4	
Pneu Tools	MS1650B				

### 16 gauge "GS"-style Medium Crown Staple

Metabo/Hitachi	N5010A				
Paslode	SCS200	3150-S16	MA-S16L	S200-S16	
Pneu Tools	MS1650P				

"N"-STYLE

### 16 gauge "N"-style Medium Crown Staple

	MAX	TA551B/16-11	TA551/16-11	TA551A/16-11			
_	Metabo/Hitachi	N5008AC2	N5008AA	N5008AB	N5008AC	N5008AAAC2	
	Pneu Tools	MS1650					
	Porter-Cable	MS200					
	Senco	SNS200XP	NS20BXP	NS20XP	SKSXP-N	SXS200XP-BST	SNS41

Huttiq-Grip™ is a trademark of Woodgrain. Other product and company names listed may be trademarks of their respective owners. Woodgrain is not affiliated with the other products and companies listed.

This information is intended to be used as a guide and only as a guide; the tool manufacturer should always be consulted for details regarding what type and size fasteners are appropriate for their tools. Tool manufacturer specifications would override information contained in this guide.

Tool Brand Tool Model



### 18 gauge "L"-style Narrow Crown

Duo-Fast	BN-1832	KN-1848	KN-1848A	KB-1836	DNS-1840	SureShot 1848F
DeWalt	DWFP1838	DCN681B				
Makita	AT638A	AT638				
MAX	TA238B/18-6	TA238/18-6	TA238A/18-6			
Metabo/Hitachi	N3804A5	N3804AB3	N3804	N3804A	N3804AB	N3804AB2
Pneu Tools	NS1840-II					
Porter-Cable	NS150C	PCC791B	NS100	NS100A	NS150	NS150B
Ridgid	R150FSF	R150FSA	R150FSE			
Senco	FinishPro 2N1	SLS15	SLS20-L	SLS20XP-L	SLS-25L	SLS25XP-L

18 GA NARROW CROWN STAPLE

### 18 gauge "SX"-style Narrow Crown Staple

Bostitch	SX1838K	SX150K-1	SB-150SX	SB-2IN1	EHF1838K	S32SX-BHF-2
----------	---------	----------	----------	---------	----------	-------------

50 TACKER STAPLE

### "50"-style Tacker Staple

Paslode	HT-550	SureShot 5020 DLAF	SureShot 5020		
Rapid	R311				



### "A11"-style Tacker Staple

Arrow	T50	HT50	HT55		
Bostitch	TR100	TR150	TR200	TRE500	
Duo-Fast	SlapShot				
Rapid	PRO R11E	A-11	R-11		
Senco	PC0705	Н			
Stanley	PHT150C	Faxmax PHT350T	Fatmax PHT250C		

A19

### "A19"-style Tacker Staple

		D 40		
Rapid	A-19	R-19		

SHCR TACKER STAPLE

### "SHCR"-style Tacker Staple

Bostitch H2B

STCR TACKER STAPLE

### "STCR"-style Tacker Staple

Bostitch	H30-8	H30-6	T6-8	T6-80C1	T6-80C2	PC4000
Rapid	R311					

Huttig-Grip™ is a trademark of Woodgrain. Other product and company names listed may be trademarks of their respective owners. Woodgrain is not affiliated with the other products and companies listed.

This information is intended to be used as a guide and only as a guide; the tool manufacturer should always be consulted for details regarding what type and size fasteners are appropriate for their tools. Tool manufacturer specifications would override information contained in this guide.

Tool Brand Tool Model

18<sub>GA</sub>

### 18 gauge Brad Nail

Bostitch	BTFP12233	BT1855K	SB-1850BN	GBT1850K	SB-2IN1	BT125K-2
DeWalt	DWFP12233	DCN680B	D51236	D51238	DWFP12231	DC608
Duo-Fast	SureShot 4450	Sure Shot 4450ST				
Makita	AF506					
MAX	NF255SF2/18	NF255FA/18				
Metabo/Hitachi	NT1850DE	NT50AE2	NT50A5	NT50GSQ9	NT32AE	NT50AE
Paslode	IM200Li.2	IM200Li	T200-F18P	T200-F18	T125-F18	901000
Pneu Tools	BN1855					
Porter-Cable	BN200C	PCC790B	BN138	BN200B	BN125	BN125A
Ridgid	R213BNF					
Senco	F-18XP	FinishPro 18Mg	FinishPro 25XP	SLP20XP	FinishPro 2N1	FinishPro 15



### 23 gauge Pin Nail

Bostitch	BTFP2350K	HP118K	TU-216-2330			
DeWalt	DWFP2350K	DWFP2350				
Duo-Fast	SureShot 2336	SureShot 2232				
Makita	AF353					
MAX	NF235A/23-35					
Metabo/Hitachi	NP35A	N5P50A	NP18DSAL			
Pneu Tools	HP2335	HP2350				
Porter-Cable	PIN138	PIN100				
Ridgid	R138HPA					
Senco	TN11L1	TN11G1	FinishPro 23LXP	FinishPro 23SXP	FinishPro 10	FinishPro 11



### 16 gauge "L"-style - Flooring Cleat

Bostitch	MIIIFS/N	MFN-200	MFN-201		
DeWalt	DWFP12569	DWMIIIFS			
Duo-Fast	FM245L	FM250ALR			
Pneu Tools	FC50-II				
Porta-Nails	465SLT				
Senco	SHF200	SHF10	SHF15	SHF50	

Huttig-Grip™ is a trademark of Woodgrain. Other product and company names listed may be trademarks of their respective owners. Woodgrain is not affiliated with the other products and companies listed.

# Woodgrain Limited Warranty for Huttig-Guard Professional, Premium, Platinum, or Stainless Steel Fasteners

### What Does This Warranty Cover?

This limited warranty applies to the first retail purchaser of Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners (also referred to herein as the "Fasteners"). Woodgrain warrants that such fasteners will be free from any defects in material and workmanship for the specified warranty period for the original project for which it was installed when used in accordance with the recommendations listed in the Huttig-Grip Fasteners Catalog or elsewhere by Woodgrain. Please note that all metal fasteners have the potential to corrode. There are no warranties (including any of warranty of merchantability) that extend beyond the foregoing and such warranty applies to Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners only.

### Who Is Entitled to the Warranty and How Long Does The Coverage Last?

This warranty is granted to the first retail purchaser only, is not transferable and lasts for the product specified warranty period for the project for which it was originally installed.

#### What Will Woodgrain Do?

Woodgrain will replace the defective Huttig-Guard Professional, Premium, Platinum, or Stainless Steel fasteners with like or equivalent product. Any labor for installation, removal or other material charges are not covered by this limited fastener warranty.

### What Does This Warranty Not Cover?

- This warranty does not cover issues caused by:
- Any defect due to environmental conditions or inadequate or improper handling, transportation, storage or maintenance,
- Failure or damage caused by improper installation (including chipped coating during installation), application, improper preparation, the building site, any 3rd party products, inadequate structure design, reuse or reinstallation of the fastener,
- Failure or damage caused by wood destroying insects, animals, wood fungus, mold, mildew, exposure to chemicals or other hazardous substances, a corrosive environment or materials, standing water, or premature deterioration of building materials,
- Failure or damage used in a structure that does not comply with all local, state and federal building codes, laws, rules and regulations,
- Use of fasteners in extreme temperatures or extreme environmental conditions,
- Fasteners subjected to negligence, excessive or improper use, willful misconduct, actions or inactions by the installer (general contractors, owners, 3rd party builders),
- Wear or damage due to traffic involving motorized vehicles.

Woodgrain's liability is limited to the replacement of the defective product only except in the event replacement of the product is not available, then a refund of the purchase price of the defective product.

#### **How Do You File A Claim?**

If the performance of Huttig-Guard fasteners does not meet the stated limited warranty, the original purchaser must contact

Woodgrain to initiate a claim. Please use the Defective Product Warranty Claim Form found at https://huttig-grip.com/warranty.

Information required for claim:

#### **Customer Information:**

First Name, Last Name Street Address, City, State, Zip E-mail address Telephone number

#### **Product Information & Claim Details:**

Purchase Date
Purchase Receipt
Product Name, including Color
Quantity Purchased
Quantity Defective
Date Installed
Where Installed (back yard, pool area, et cetera)
Application (fence, deck, et cetera)

Include photos of structure and defective product along with original box and receipt.

Initiate claim by email at warranty@woodgrain.com or by mail:

Woodgrain ATTN: TQMP 555 Maryville University Drive Suite 400 St. Louis, MO 63141

This warranty is subject to revision without notice.

THIS WRITING CONTAINS THE ENTIRE AGREEMENT BETWEEN WOODGRAIN AND THE CONSUMER PURCHASER. ALL WARRANTIES, WHETHER EXPRESSED OR IMPLIED, WARRANTIES OF MERCHANT-ABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXCLUDED EXCEPT AS OTHERWISE SPECIFICALLY SET FORTH HEREIN. WOODGRAIN'S LIABILITY IS LIMITED TO THE PURCHASE PRICE OF THE DEFECTIVE PRODUCT. IN NO EVENT ARE CONSEQUENTIAL OR INCIDENTAL DAMAGES RECOVERABLE UNDER THIS WARRANTY.



### **FASTENER LOCATIONS IN GREEN**

#### **ALBUQUERQUE, NM**

8333 Washington Place, NE Suite H Albuquerque, NM 87113 Tel (505) 823-9300

### ATLANTA, GA

1301 Progress Center Avenue Lawrenceville, GA 30043 Tel (471) 552-8446

#### **AUBURN, WA**

525 "C" Street, NW Auburn, WA 98001 Tel (253) 941-2600

### AUGUSTA, ME

#7 Gaywalk Street Augusta, ME 04330 Tel (207) 626-0175

### BALTIMORE, MD

2020 Washington Boulevard Baltimore, MD 21230 Tel (443) 798-2230

### **CAPE GIRARDEAU, MO**

4072 Nash Road Cape Girardeau, MO 63701 Tel (573) 335-8231

### **CENTRAL FLORIDA**

45150 Highway 27 N Davenport, FL 33897 Tel (863) 420-7723

### **DALLAS, TX**

2115 Valley View Lane Farmers Branch, TX 75234 Tel (972) 620-2200

#### ELKHART, IN

30244 Country Road #12 Elkhart, IN 46514 Tel (574) 262-3666

#### **FORT MYERS, FL**

3580 Work Drive Fort Myers, FL 33916 Tel (239) 332424

### **GREENVILLE, SC**

36 W Lenhardt Road Piedmont, SC 29673 Tel (864) 277-9123

### HOFFMAN, NC

2772 US Highway 1 Marston, NC 28363 Tel (910) 281-3116

### **HOOKSETT, NH**

25 Lehoux Drive Hooksett, NH 03106 Tel (603) 624-0543

### HOUSTON, TX

4343 Kennedy Commerce Drive Houston, TX 77032 Tel (281) 372-0311

#### JACKSONVILLE, FL

5203 W 1st Street Jacksonville, FL 32254 Tel (904) 378-1361

#### JACKSON, MS - NORTH

240 NW Industrial Parkway Jackson, MS 32909 Tel (601) 362-1408

#### JACKSON, MS - SOUTH

3974 I-55 S Frontage Road Jackson, MS 39212 Tel (601) 373-6581

#### LANCASTER, PA

3639 Hempland Road Lancaster, PA 17601 Tel (717) 285-2900

### LATROBE, PA

123 BenBilt Place Greensburg, PA 15601

### MEDFORD, OR

2194 Sage Road Medford, OR 97501 Tel (541) 773-8474

### **NEWINGTON, CT**

407 Alumni Road Newington, CT 06111 Tel (860) 667-8541

#### PHOENIX. AZ - SOUTH

229 49th Avenue Phoenix, AZ 85043 Tel (800) 756-0799

### **PHOENIX, AZ - NORTH**

3601 N 34th Avenue Phoenix, AZ 85017 Tel (602) 415-6200

### RIVIERA BEACH, FL

13111 W 15th Street Riviera Beach, FL 33404 Tel (561) 881-3851

#### **ROCKY MOUNT, NC**

3375 N Wesleyan Boulevard Rocky Mount, NC 33404 Tel (561) 881-5550

### SACO, ME

65 Spring Hill Road Saco, ME 04072 Tel (207) 283-4392

### SACRAMENTO, CA

8120 Power Ridge Road Sacramento, CA 95826 Tel (916) 381-4242

### **SOUTHERN CALIFORNIA**

8865 Utica Avenue, Unit B Rancho Cucamonga, CA 91730 Tel (909) 987-8419

### TAUNTON, MA

25 John Hancock Road Taunton, MA 02780 Tel (508) 823-0404

### TIGARD, OR

8100 SW Hunziker Street Tigard, OR 97223 Tel (503) 620-1411

#### TITUSVILLE, FL

1450 Shepard Drive Titusville, FL 32780 Tel (321) 385-3880

### **WILKES-BARRE, PA**

350 Lasley Avenue Hanover Township, PA 18706 Tel (508) 823-0404